



# Medium Voltage Transformers



*2.5 and 5 kV Single  
and Three Phase*





Acme Electric Medium Voltage Dry-Type Transformers are designed for economical, trouble-free service. Air-cooling eliminates the principal hazards associated with liquid-filled transformers. They are generally smaller, lighter, and easier to maintain as well.

Encased in ventilated steel enclosures with no exposed live parts, our medium voltage transformers are suited for indoor application close to the load for more efficient distribution of power at lower operating costs. We optimize our designs for BIL levels, short circuit strength, losses, temperature rise, corona-free operation, and low sound levels.

**General applications include:**

- Hospitals, clinics and other healthcare operations
- Educational facilities
- Office buildings
- Theaters, stadiums and other entertainment venues

### Sections

- Section 1: Dry-Type Distribution Transformers
- **Section 2: Medium Voltage Transformers**
- Section 3: Harmonic Mitigating & Non-Linear Load Transformers
- Section 4: Drive Isolation & AC Line Reactors
- Section 5: Industrial Control Transformers
- Section 6: DIN-Rail Power Supplies/Receptacles & Low Voltage Lighting Transformers
- Section 7: Buck-Boost Transformers
- Section 8: Panel-Tran Zone Power Centers
- Section 9: Power Conditioning Products
- Section 10: Amveco Toroidal Solutions
- Section 11: Custom Solutions

### Table Of Contents

#### Section 2: Medium Voltage Transformers

General Description and Features.....	3
Selection Charts, Single and Three Phase.....	4 - 5
Design Figures, Warranty .....	6
Index.....	7

## Section 2 | General Description and Features

### Medium Voltage Transformers, 2.5–5kV Class

Medium voltage dry-type transformers are used to step down incoming high voltage power to utilization voltages for residential, commercial, institutional and industrial applications. Offering many advantages over liquid-filled transformers, they are ideally suited for indoor application close to the load for more efficient distribution of power at lower operating costs.

Acme Electric medium voltage dry-type transformers are air-cooled by natural convection, eliminating the principal hazards associated with liquid-filled transformers as well as the need for expensive fireproof vaults and venting systems for toxic gas. They are generally smaller, lighter, and easier to maintain than liquid-filled transformers, requiring only occasional cleaning and inspection. They are encased in a ventilated steel enclosure with no exposed live parts, making them ideal for installation in buildings such as hospitals, theaters, schools, office buildings, and factories.

Because Acme Electric gives close attention to detail and workmanship throughout design, production, and inspection, our medium voltage dry-type transformers are designed for economical, trouble-free service for a life expectancy of 25 years or more. In particular, we optimize the design for BIL levels, short circuit strength, losses, temperature rise, corona-free operation, and low sound levels so that there is no need to over-specify to ensure quality and long, economical performance.

### DOE 2016 and CSA C802.2

Our new line of medium voltage transformers not only meets but exceeds the new, more stringent DOE 2016 Energy Efficiency Standards U.S. DOE 10 CFR Part 431 Subpart K, and Canadian Energy Efficiency Regulations SOR/94-651.

■ UL Listed ■ All units are cUL Listed per UL-1562 and CSA C22.2 No. 47.

### Basic Impulse Level

One of the most important considerations in the specification and design of medium voltage dry type transformers is the basic impulse level (BIL). This is the ability of the transformer to withstand impulse voltages impressed upon it by switching surges or lightning. BIL ratings are per IEEE Std C57.12.01.

### Corona

Corona is the ionization of air surrounding a high voltage electrode. Corona discharge can reduce transformer life by

1. Gradually breaking down the chemistry of insulation system
2. Forming streamers or eroding tracks on the insulation or insulators, causing subsequent flashover
3. Reducing the transformer BIL level

Corona-free operation is a priority in all Acme Electric transformer designs. Through a combination of air spacing, insulating materials, and semiconducting tape, all of our medium voltage dry-type transformers have corona extinction levels that exceed their operating voltage level.

### Coil Construction

Coils are wound with aluminum conductor and insulated with UL recognized Class 220° C materials such as DuPont Nomex®.

### Continuous Wound Coil

The continuous layer wound coil consists of columns of rectangular magnet wire layers separated by axial cooling ducts inserted between various layers. This gives the coil a single column mass and maximum mechanical axial strength. Coils are also kept as round and tight as possible in order to provide maximum strength against radial short circuit forces.

The air ducts provide adequate air space between layers and coils, eliminating the need for flash barriers, which can restrict cooling air flow, increasing hot spot temperatures. During assembly, high voltage windings are positioned over low voltage windings to minimize axial stresses under short-circuit conditions.

All coils are preheated to drive out moisture, and then impregnated with high quality polyester resin to eliminate air-filled voids that can promote corona. This also reduces effective spacing necessary to maintain a high BIL.

### Cores

Transformer cores are manufactured with grain oriented cold rolled high purity silicon steel having the highest possible silicon content compatible with magnetic steel production methods. All core steel has been annealed to relieve stresses and to assure flatness and optimum magnetic properties after slitting and processing.

### Coil Taps

Coil taps are furnished in the high voltage winding to compensate for variations in the incoming supply voltage to the transformer. All Acme Electric medium voltage transformers are equipped with 2–2½% ANFC (Above Normal Full Capacity) and 2–2½% BNFC (Below Normal Full Capacity) high voltage taps that are easily accessible through removable panels on the front of the transformer.

Further, we are structured to provide custom specifications. If you need a medium voltage dry-type transformer with specifications different from those in our existing line, our engineers can design one for you. For assistance, contact your Acme representative or call 1-800-334-5214 for assistance in developing a solution to your needs.

### Features

- Completely encased in a ventilated steel enclosure with no exposed live parts
- Smaller, easier to maintain than liquid-filled transformers
- Long life expectancy
- Available with 3R Weathershield
- Air-cooled by natural convection
- No additional fireproofing or venting needed
- Covered under ACME's 3 year warranty

### Applications

- Residential applications
- Educational facilities
- Theaters, stadiums and other entertainment venues
- Hospitals, clinics and other health care operations
- Office buildings



### SINGLE PHASE, 60Hz, 2.5kV & 5kV CLASS, NEMA 1 ENCLOSED, DOE/NRCAN 2019 Compliant

kVA	Catalog Number	Height (Inches)(Cm.)	Width (Inches)(Cm.)	Depth (Inches)(Cm.)	Weight (Lbs.)(Kg.)	Mounting Type (Wall)(Floor)	Knockouts (Inches)(Cm.)	Optional Electrostatic Shield	Design Figures
15	WB015KXX ①	28.3 (71.8)	20.3 (51.5)	16.3 (41.4)	255 (115.6)	F	NA	NA	E
25	WC025KXX ①	34.8 (88.3)	26.3 (66.8)	22.3 (56.6)	320 (145.1)	F	NA	NA	E
37.5	WC037KXX ①	34.8 (88.3)	26.3 (66.8)	22.3 (56.6)	400 (181.4)	F	NA	NA	E
50	WC050KXX ①	34.8 (88.3)	26.3 (66.8)	22.3 (56.6)	530 (240.4)	F	NA	NA	E
75	WC075KXX ①	34.8 (88.3)	26.3 (66.8)	22.3 (56.6)	690 (312.9)	F	NA	NA	E
100	WC100KXX ①	40.8 (103.6)	32.3 (82.0)	28.3 (71.8)	800 (362.8)	F	NA	NA	E
167	WC167KXX ①	40.8 (103.6)	32.3 (82.0)	28.3 (71.8)	1100 (498.9)	F	NA	NA	E
250	WC250KXX ①	40.8 (103.6)	32.3 (82.0)	28.3 (71.8)	1500 (680.3)	F	NA	NA	E
333	WC333KXX ①	48.0 (121.9)	48.0 (121.9)	32.0 (81.2)	2000 (907.1)	F	NA	NA	E
500	WC500KXX ①	54.0 (137.1)	60.0 (152.4)	40.0 (101.6)	3200 (1451.4)	F	NA	NA	G

① Add appropriate voltage number code to catalog number

Available with 3R Weathershield

### SINGLE PHASE VOLTAGE SELECTION

XX	Primary Volts	Secondary Volts	Wiring Diagrams
01	2400	120/240	1
02	2400	240/480	1
03	2400	600	2
04	4160	120/240	1
05	4160	240/480	1
06	4160	600	2
07	4800	120/240	1
08	4800	240/480	1
09	4800	600	2

**SCH 1**

LINE CONNECTION	VOLTAGE	JUMPER CONNECTION	LOAD CONNECTION	VOLTAGE	JUMPER CONNECTION
H1 - H2	105 %	1 - 2	X1 - X4	120	X1 - X3, X2 - X4
	102.5 %	2 - 3		240	X2 - X3
	100 %	3 - 4	X1 - X4	240	X1 - X3, X2 - X4
	97.5 %	4 - 5		480	X2 - X3
	95 %	5 - 6			

**SCH 2**

LINE CONNECTION	VOLTAGE	JUMPER CONNECTION	LOAD CONNECTION	VOLTAGE
H1 - H2	105 %	1 - 2	X1 - X2	600
	102.5 %	2 - 3		
	100 %	3 - 4		
	97.5 %	4 - 5		
	95 %	5 - 6		





### THREE PHASE, 60Hz, 2.5kV & 5kV CLASS, NEMA 1 ENCLOSED, DOE/NRCAN 2019 Compliant


kVA	Catalog Number	Height (Inches)(Cm.)	Width (Inches)(Cm.)	N-1 Depth (Inches)(Cm.)	Weight (Lbs.)(Kg.)	Mounting Type (Wall)(Floor)	Knockouts (Inches)(Cm.)	Optional Electrostatic Shield	Design Figures
15	WH015KYY ①	34.8 (88.3)	26.3 (66.8)	22.3 (56.6)	340 (154.2)	F	NA	NA	E
30	WI030KYY ①	34.8 (88.3)	26.3 (66.8)	22.3 (56.6)	450 (204.1)	F	NA	NA	E
45	WI045KYY ①	34.8 (88.3)	26.3 (66.8)	22.3 (56.6)	500 (226.7)	F	NA	NA	E
75	WI075KYY ①	40.8 (103.6)	32.3 (82.0)	28.3 (71.8)	810 (367.4)	F	NA	NA	E
112.5	WI112KYY ①	40.8 (103.6)	32.3 (82.0)	28.3 (71.8)	950 (430.9)	F	NA	NA	E
150	WI150KYY ①	48.0 (121.9)	48.0 (121.9)	32.0 (81.2)	1260 (571.5)	F	NA	NA	E
225	WI225KYY ①	48.0 (121.9)	48.0 (121.9)	32.0 (81.2)	1630 (739.3)	F	NA	NA	E
300	WI300KYY ①	48.0 (121.9)	48.0 (121.9)	32.0 (81.2)	2180 (988.8)	F	NA	NA	E
500	WI500KYY ①	54.0 (137.1)	60.0 (152.4)	40.0 (101.6)	2940 (907.1)	F	NA	NA	G
750	WI750KYY ①	54.0 (137.1)	60.0 (152.4)	40.0 (101.6)	4400 (1995.8)	F	NA	NA	G
1000	WI001MY ①	72.0 (182.8)	68.0 (172.7)	48.0 (121.9)	6100 (2766.9)	F	NA	NA	G
1500	WI015MY ①	84.0 (213.3)	84.0 (213.3)	48.0 (121.9)	8100 (3674.0)	F	NA	NA	G
2000	WI002MY ①	84.0 (213.3)	84.0 (213.3)	48.0 (121.9)	9500 (4309.1)	F	NA	NA	G

① Add appropriate voltage number code to catalog number

Available with 3R Weathershield


### THREE PHASE VOLTAGE SELECTION

YY	Primary Volts	Secondary Volts	Wiring Diagrams
10	2400Δ	208Y120	3
11	2400Δ	240Δ	4
12	2400Δ	480Δ	4
13	2400Δ	480Y277	3
14	2400Δ	600Δ	4
15	2400Δ	600Y347	3
16	4160Δ	208Y120	3
17	4160Δ	240Δ	4
18	4160Δ	480Δ	4
19	4160Δ	480Y277	3
20	4160Δ	600Δ	4
21	4160Δ	600Y347	3
22	4800Δ	208Y120	3
23	4800Δ	240Δ	4
24	4800Δ	480Δ	4
25	4800Δ	480Y277	3
26	4800Δ	600Δ	4
27	4800Δ	600Y347	3

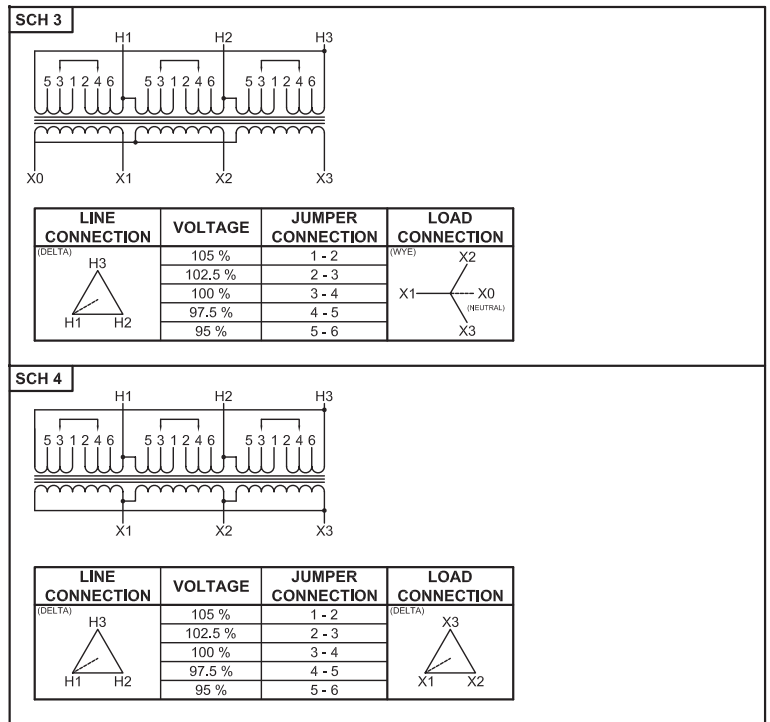




These drawings are for reference only. Contact factory for certified drawings.

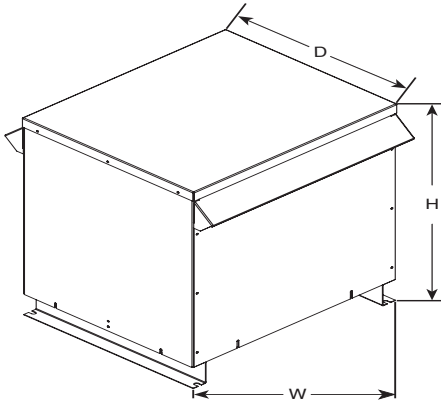

**Design E**

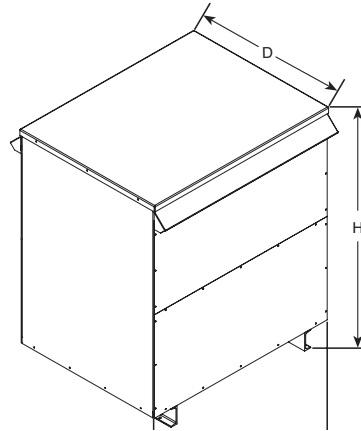

**Design G**

# Warranty Certificate

### Acme Electric 10-Year Limited\* Warranty

Acme Electric (Acme) warrants to the original purchaser to correct by repair, replacement or refund of original purchase price, at Acme's option, products manufactured and sold by its Power Distribution Products Division, that may fail in service within the applicable period as set forth below, from the date of manufacture provided however, that conditions of operation have been normal at all times, and that the equipment has not been subjected to abnormal stress from such causes as incorrect primary voltage or frequency, improper ventilation or improper use. This warranty is made on the condition that prompt notice of defect is given to Acme in writing within the warranty period, and that Acme's inspection reveals to its satisfaction that the original purchaser's claim is valid under the terms of this warranty. Acme's obligation under this warranty, which is in lieu of all other warranties, express or implied, including the implied warranty of fitness for a particular purpose and merchantability, is limited to replacing or repairing defective products or parts, free of charge, provided they are returned to the factory, or refund of original purchase price, at Acme's option. However, purchased components (except for timers and photocells used in low voltage lighting power supplies) including but not limited to capacitors, circuit breakers, terminal blocks, batteries, fuses and tubes shall not be covered under this warranty. Repairs or replacement deliveries shall not interrupt or prolong the term of this warranty. Acme will not be liable for any special, indirect, consequential or incidental damages, including, without limitation, from loss of use, data, function or profits deriving out of or in connection with the use or performance of the product and shall have no liability for payment of any other damages whether in an action of contract, strict liability or tort. The remedy provided herein states Acme Electric's entire liability and buyer's sole and exclusive remedy here under. Rights may vary in certain states.

### \*Warranty Period:

Standard Catalog Transformers — 10-year limited; Medium Voltage Transformer — 3-year limited, Custom products — 1 year.



## Section 2 | Alphanumerical Catalog Number Index

WB015K01 ___4	WC100K03 ___4	WH015K14 ___5	WI002M25 ___5	WI045K18 ___5	WI150K11 ___5	WI300K22 ___5
WB015K02 ___4	WC100K04 ___4	WH015K15 ___5	WI002M26 ___5	WI045K19 ___5	WI150K12 ___5	WI300K23 ___5
WB015K03 ___4	WC100K05 ___4	WH015K16 ___5	WI002M27 ___5	WI045K20 ___5	WI150K13 ___5	WI300K24 ___5
WB015K04 ___4	WC100K06 ___4	WH015K17 ___5	WI015M10 ___5	WI045K21 ___5	WI150K14 ___5	WI300K25 ___5
WB015K05 ___4	WC100K07 ___4	WH015K18 ___5	WI015M11 ___5	WI045K22 ___5	WI150K15 ___5	WI300K26 ___5
WB015K06 ___4	WC100K08 ___4	WH015K19 ___5	WI015M12 ___5	WI045K23 ___5	WI150K16 ___5	WI300K27 ___5
WB015K07 ___4	WC100K09 ___4	WH015K20 ___5	WI015M13 ___5	WI045K24 ___5	WI150K17 ___5	WI500K10 ___5
WB015K08 ___4	WC167K01 ___4	WH015K21 ___5	WI015M14 ___5	WI045K25 ___5	WI150K18 ___5	WI500K11 ___5
WB015K09 ___4	WC167K02 ___4	WH015K22 ___5	WI015M15 ___5	WI045K26 ___5	WI150K19 ___5	WI500K12 ___5
WC025K01 ___4	WC167K03 ___4	WH015K23 ___5	WI015M16 ___5	WI045K27 ___5	WI150K20 ___5	WI500K13 ___5
WC025K02 ___4	WC167K04 ___4	WH015K24 ___5	WI015M17 ___5	WI075K10 ___5	WI150K21 ___5	WI500K14 ___5
WC025K03 ___4	WC167K05 ___4	WH015K25 ___5	WI015M18 ___5	WI075K11 ___5	WI150K22 ___5	WI500K15 ___5
WC025K04 ___4	WC167K06 ___4	WH015K26 ___5	WI015M19 ___5	WI075K12 ___5	WI150K23 ___5	WI500K16 ___5
WC025K05 ___4	WC167K07 ___4	WH015K27 ___5	WI015M20 ___5	WI075K13 ___5	WI150K24 ___5	WI500K17 ___5
WC025K06 ___4	WC167K08 ___4	WI001M10 ___5	WI015M21 ___5	WI075K14 ___5	WI150K25 ___5	WI500K18 ___5
WC025K07 ___4	WC167K09 ___4	WI001M11 ___5	WI015M22 ___5	WI075K15 ___5	WI150K26 ___5	WI500K19 ___5
WC025K08 ___4	WC250K01 ___4	WI001M12 ___5	WI015M23 ___5	WI075K16 ___5	WI150K27 ___5	WI500K20 ___5
WC025K09 ___4	WC250K02 ___4	WI001M13 ___5	WI015M24 ___5	WI075K17 ___5	WI225K10 ___5	WI500K21 ___5
WC037K01 ___4	WC250K03 ___4	WI001M14 ___5	WI015M25 ___5	WI075K18 ___5	WI225K11 ___5	WI500K22 ___5
WC037K02 ___4	WC250K04 ___4	WI001M15 ___5	WI015M26 ___5	WI075K19 ___5	WI225K12 ___5	WI500K23 ___5
WC037K03 ___4	WC250K05 ___4	WI001M16 ___5	WI015M27 ___5	WI075K20 ___5	WI225K13 ___5	WI500K24 ___5
WC037K04 ___4	WC250K06 ___4	WI001M17 ___5	WI030K10 ___5	WI075K21 ___5	WI225K14 ___5	WI500K25 ___5
WC037K05 ___4	WC250K07 ___4	WI001M18 ___5	WI030K11 ___5	WI075K22 ___5	WI225K15 ___5	WI500K26 ___5
WC037K06 ___4	WC250K08 ___4	WI001M19 ___5	WI030K12 ___5	WI075K23 ___5	WI225K16 ___5	WI500K27 ___5
WC037K07 ___4	WC250K09 ___4	WI001M20 ___5	WI030K13 ___5	WI075K24 ___5	WI225K17 ___5	WI750K10 ___5
WC037K08 ___4	WC333K01 ___4	WI001M21 ___5	WI030K14 ___5	WI075K25 ___5	WI225K18 ___5	WI750K11 ___5
WC037K09 ___4	WC333K02 ___4	WI001M22 ___5	WI030K15 ___5	WI075K26 ___5	WI225K19 ___5	WI750K12 ___5
WC050K01 ___4	WC333K03 ___4	WI001M23 ___5	WI030K16 ___5	WI075K27 ___5	WI225K20 ___5	WI750K13 ___5
WC050K02 ___4	WC333K04 ___4	WI001M24 ___5	WI030K17 ___5	WI112K10 ___5	WI225K21 ___5	WI750K14 ___5
WC050K03 ___4	WC333K05 ___4	WI001M25 ___5	WI030K18 ___5	WI112K11 ___5	WI225K22 ___5	WI750K15 ___5
WC050K04 ___4	WC333K06 ___4	WI001M26 ___5	WI030K19 ___5	WI112K12 ___5	WI225K23 ___5	WI750K16 ___5
WC050K05 ___4	WC333K07 ___4	WI001M27 ___5	WI030K20 ___5	WI112K13 ___5	WI225K24 ___5	WI750K17 ___5
WC050K06 ___4	WC333K08 ___4	WI002M10 ___5	WI030K21 ___5	WI112K14 ___5	WI225K25 ___5	WI750K18 ___5
WC050K07 ___4	WC333K09 ___4	WI002M11 ___5	WI030K22 ___5	WI112K15 ___5	WI225K26 ___5	WI750K19 ___5
WC050K08 ___4	WC500K01 ___4	WI002M12 ___5	WI030K23 ___5	WI112K16 ___5	WI225K27 ___5	WI750K20 ___5
WC050K09 ___4	WC500K02 ___4	WI002M13 ___5	WI030K24 ___5	WI112K17 ___5	WI300K10 ___5	WI750K21 ___5
WC075K01 ___4	WC500K03 ___4	WI002M14 ___5	WI030K25 ___5	WI112K18 ___5	WI300K11 ___5	WI750K22 ___5
WC075K02 ___4	WC500K04 ___4	WI002M15 ___5	WI030K26 ___5	WI112K19 ___5	WI300K12 ___5	WI750K23 ___5
WC075K03 ___4	WC500K05 ___4	WI002M16 ___5	WI030K27 ___5	WI112K20 ___5	WI300K13 ___5	WI750K24 ___5
WC075K04 ___4	WC500K06 ___4	WI002M17 ___5	WI045K10 ___5	WI112K21 ___5	WI300K14 ___5	WI750K25 ___5
WC075K05 ___4	WC500K07 ___4	WI002M18 ___5	WI045K11 ___5	WI112K22 ___5	WI300K15 ___5	WI750K26 ___5
WC075K06 ___4	WC500K08 ___4	WI002M19 ___5	WI045K12 ___5	WI112K23 ___5	WI300K16 ___5	WI750K27 ___5
WC075K07 ___4	WC500K09 ___4	WI002M20 ___5	WI045K13 ___5	WI112K24 ___5	WI300K17 ___5	
WC075K08 ___4	WH015K10 ___5	WI002M21 ___5	WI045K14 ___5	WI112K25 ___5	WI300K18 ___5	
WC075K09 ___4	WH015K11 ___5	WI002M22 ___5	WI045K15 ___5	WI112K26 ___5	WI300K19 ___5	
WC100K01 ___4	WH015K12 ___5	WI002M23 ___5	WI045K16 ___5	WI112K27 ___5	WI300K20 ___5	
WC100K02 ___4	WH015K13 ___5	WI002M24 ___5	WI045K17 ___5	WI150K10 ___5	WI300K21 ___5	



*Our history is strong,  
engaging and dedicated...  
just like our people.*



***The Acme Electric Legacy***

Acme Electric provides power quality and conversion equipment to OEM, industrial and commercial markets. Founded in 1917 in Cleveland, Ohio as the Acme Electric and Machine Company, the company has a legacy of providing innovative electrical products. Acme is now part of Hubbell Incorporated, one of the largest electrical manufacturers in North America. Hubbell's history of innovation extends back to 1888 and the invention of the pull chain light switch and the electric plug.

Acme's original product line of motor-driven battery chargers, electrical appliances and electrical generators has transformed to a diversified mix of high-quality low voltage, medium voltage and 3 phase transformers and power supplies.

Learn more about us at [www.hubbell.com/acmeelectric/en](http://www.hubbell.com/acmeelectric/en)



**COMMERCIAL  
CONSTRUCTION**

A Division of Hubbell Incorporated (Delaware)

ACME ELECTRIC  
Menomonee Falls, WI 53051  
[www.hubbell.com/acmeelectric/en](http://www.hubbell.com/acmeelectric/en)  
800-334-5214

