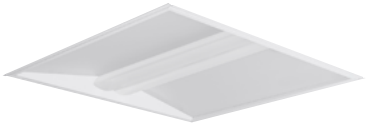

RLA - Recessed LED Architectural

- Performance and Energy Savings
- Available in 2'x2' & 2'x4'
- DesignLights Consortium®*

QS10 10-Day Quick Ship Ordering Guide

Order Limit Per Fixture Selection: 100

RLA		-			-	G		U	-	
MODEL	SIZE		COLOR TEMP	LUMEN OUTPUT		CEILING TYPE	DRIVER	VOLTAGE		OPTIONS

MODEL
- **RLA** Recessed LED Architectural Luminaire

SIZE
- **22** 2' × 2'
- **24** 2' × 4'

COLOR TEMP
- **35** 3500K
- **40** 4000K

LUMEN OUTPUT
- **LW** Low Watt
- **ML** Medium Lumen
- **HL** High Lumen
- **VL** Very High Lumen

CEILING TYPE
- **G** Grid[1]

DRIVER
- **E** Fixed Output
- **ED** 0-10V Dimming
- **ED1** 0-10V 1% Dimming

VOLTAGE
- **U** 120V-277V

OPTIONS
- **C388** 3-Wire Flex
- **C488** 4-Wire Flex
- **C588** 5-Wire Flex
- **ELL14** Emergency Battery Pack Installed, 1400 Lumen[2]

[1] For drywall, order G with Flange Kit Accessory.
[2] For compatibility with Dual-Lite LiteGear® inverters in lieu of installed Battery Pack, contact Hubbell Lighting Representative.
*DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org.