


IMPORTANT SAFETY INFORMATION. READ AND FOLLOW ALL SAFETY INSTRUCTIONS. Follow label information and instructions concerning Wet or Damp Locations, installation near combustible materials, insulation, building materials, and proper lamping. Do not install in areas subject to combustible vapors or gases. Before wiring to power supply and during servicing or relamping, turn off power at fuse or circuit breaker. **All servicing or relamping must be performed by qualified service personnel. Product must be grounded to avoid potential electric shock or other potential hazard. Product must be mounted in locations and at heights and in a manner consistent with its intended use, and in compliance with the National Electrical Code and local codes.** The use of accessory equipment not recommended by the manufacturer or installed contrary to instructions may cause an unsafe condition. Do not block light emanating from product in whole or part, as this may cause an unsafe condition. Do not allow items such as drapes, curtains, screens or the like to come into contact with the product or to block light from the product, as this may cause an unsafe condition.

INSTALLATION INSTRUCTIONS PENDANT SERIES FIXTURE

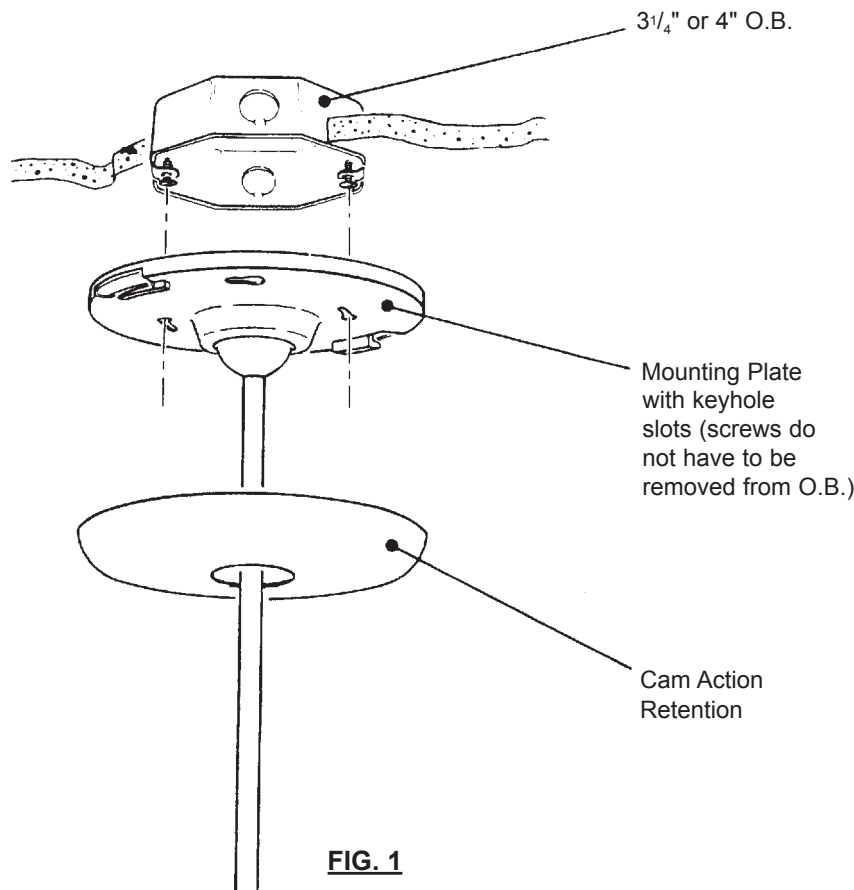

1. Make electrical connections. Connect ground wires to green ground leads. Connect white (common) to white leads. Connect power supply (line) to black leads. (see wiring diagram).

WARNING: DO NOT pinch wires. Consult a Qualified Electrician for all other options that require other wiring configurations.

2. Fasten mounting plate to outlet box.
3. Twist canopy cover in place. (Fig. 1)



INSTRUCTIONS FOR SHORTENING STEM LENGTHS ON CATALOG NO. 1122, 1125, 1128, 1136, 1138 & 1140


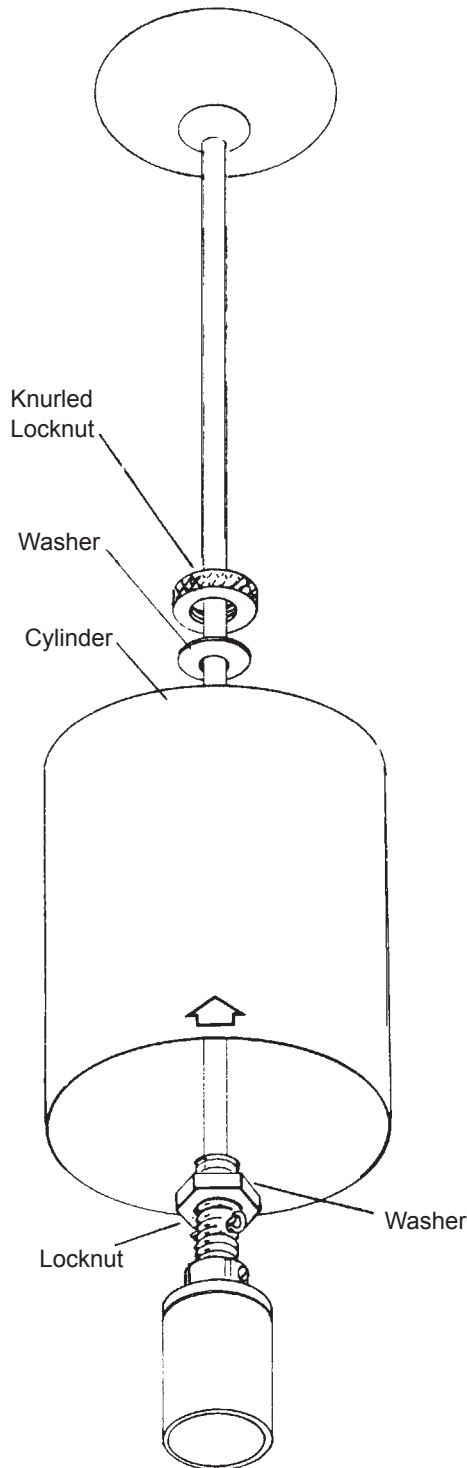


FIG. 1

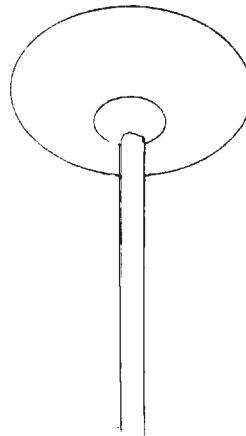

1. Remove reflector or baffle, if used.
2. Loosen knurled locknut. (Fig. 1)
3. Push cylinder up stem.
4. Remove cotter pin and pull socket assembly clear of the stem. (Fig. 2)
5. Cut stem to desired length and drill 1/8" diameter hole through stem 3/8" from end of stem to center of hole. (Fig. 3)
6. Reassemble fixture.

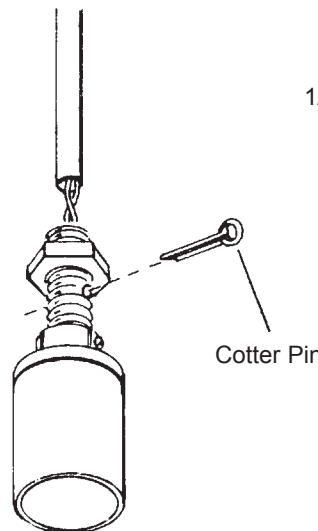


FIG. 2

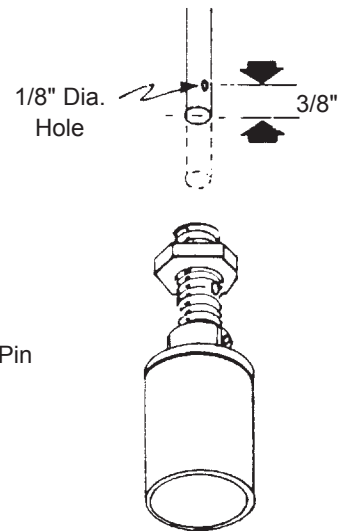


FIG. 3

