


CATALOG NUMBER		CONDUCTOR	L	DIE INDEX	TOOLS, DIE SET CATALOG NUMBER & (CRIMPS PER END)				KEARNEY DIE #
SET	SLEEVES				MD7, MD6	Y35, 750, Y45, Y46	Y48B	Y60BHU	
YDS021R	STEEL	YDS25RP2	2 (7-1)	4.75 [121]	242	W242 (8)	U242 (4)	--	--
	ALUM.	YDS021RP1		17.00 [432]	241	W241 (10)	U241 (5)	--	--
YDS1R	STEEL	YDS1RP2	1 (6-1)	4.13 [105]	240	W240 (6)	U240 (3)	--	--
	ALUM.	YDS1RP1		16.63 [422]	241	W21 (10)	U241 (5)	--	--
YDS25R	STEEL	YDS25RP2	1/0 (6-1)	4.75 [121]	242	W242 (8)	U242 (4)	--	K 5/16
	ALUM.	YDS25RP1		17.00 [432]	243	W243 (12)	U243 (6)	--	K 5/8-1
YDS26R	STEEL	YDS26RP2	2/0 (6-1)	5.25 [133]	242	W242 (8)	U242 (4)	--	--
	ALUM.	YDS26RP1		19.75 [502]	245	W245 (15)	U245 (8)	--	--
YDS27R	STEEL	YDS27RP2	3/0 (6-1)	5.25 [133]	248	W248 (16)	U248 (8)	C248 (3)	L248 (3) K 3/8
	ALUM.	YDS27RP1		16.75 [425]	247	W247 (12)	U247 (6)	C247 (4)	L247 (4) K 7/32
YDS28R	STEEL	YDS28RP2	4/0 (6-1)	5.13 [130]	248	W248 (14)	U248 (7)	C248 (4)	L248 (4) K 3/8
	ALUM.	YDS28RP1		18.88 [479]	249	W249 (14)	U249 (7)	C249 (4)	L249 (4) K 8/40
YDS291R	STEEL	YDS1RP2	266.8 (18-1)	4.13 [105]	240	W240 (6)	U240 (3)	--	--
	ALUM.	YDS291RP1		19.75 [502]	251	--	U251 (12)	C251 (6)	L251 (6)
YDS30R	STEEL	YDS30RP2	266.8 (26-7)	6.00 [152]	250	--	U250 (10)	C250 (3)	L250 (3) K 1/2
	ALUM.	YDS30RP1		19.75 [502]	251	--	U251 (10)	C251 (5)	L251 (5) K 1
YDS321R	STEEL	YDS25RP2	336.4 (18-1)	4.75 [121]	242	W242 (8)	U242 (4)	C242 (2)	L242 (2) --
	ALUM.	YDS321RP1		17.88 [454]	490	--	U490 (10)	C490 (4)	L490 (4)
YDS32R	STEEL	YDS32RP2	336.4 (26-7)	6.88 [175]	252	--	U252 (9)	C252 (3)	L252 (3) K 9/16
	ALUM.	YDS32RP1		22.25 [565]	316	--	U316 (9)	C316 (3)	L316 (3) K 1 1/4-1
YDS33R	STEEL	YDS41RP2	336.4 (30-7)	8.63 [219]	305	--	U305 (9)	C305 (3)	L305 (3) --
	ALUM.	YDS33RP1		22.25 [565]	316	--	U316 (9)	C316 (3)	L316 (3) K 1 1/4-1
YDS34R	STEEL	YDS34RP2	397.5 (26-7)	6.25 [159]	253	--	U253 (9)	C253 (3)	L253 (3) --
	ALUM.	YDS35RP1		25.63 [651]	317	--	U317 (12)	C317 (4)	L317 (4) --
YDS35R	STEEL	YDS44RP2	397.5 (30-7)	8.00 [203]	255	--	U255 (12)	C255 (4)	L255 (4) --
	ALUM.	YDS35RP1		25.63 [651]	317	--	U317 (12)	C317 (4)	L317 (4) --
YDS361R	STEEL	YDS27RP2	477 (18-1)	5.25 [133]	248	W248 (16)	U248 (8)	C248 (4)	L248 (4) --
	ALUM.	YDS361RP1		25.38 [645]	327	--	U327 (16)	C327 (5)	L327 (5) --
YDS326R	STEEL	YDS34RP2	477 (24-7)	6.25 [159]	253	--	U253 (9)	C253 (3)	L253 (3) --
	ALUM.	YDS37RP1		26.38 [670]	261	--	U261 (12)	C261 (4)	L261 (4) --
YDS36R	STEEL	YDS36RP2	477 (26-7)	7.88 [200]	350	--	U350 (12)	C350 (4)	L350 (4) --
	ALUM.	YDS37RP1		26.38 [670]	261	--	U261 (12)	C261 (4)	L261 (4) --

CATALOG NUMBER		CONDUCTOR	L	DIE INDEX	TOOLS, DIE SET CATALOG NUMBER & (CRIMPS PER END)				
SET	SLEEVES				MD7, MD6	Y35, 750, Y45, Y46	Y48B	Y60BHU	
YDS392R	STEEL	YDS41RP2	556.5 (24-7)	8.63 [219]	305	--	U305 (9)	C305 (3)	L305 (3)
	ALUM.	YDS39RP1		26.13 [664]	608	--	U608 (15)	C608 (5)	L608 (5)
YDS39R44RS	STEEL	YDS44RP2	556.5 (26-7)	8.00 [203]	255	--	U255 (12)	C255 (4)	L255 (4)
	ALUM.	YDS39RP1		26.13 [664]	608	--	U608 (15)	C608 (5)	L608 (5)
YDS43R45RS	STEEL	YDS45RP2	636 (26-7)	9.00 [229]	320	--	S320 (15)	P320 (15)	C320 (5) L320 (5)
	ALUM.	YDS43RP1		32.50 [826]	319	--	S319 (18)	P319 (18)	C319 (6) L319 (6)
YDS43R43RS	STEEL	YDS43RP2	636(24-7)	8.00 [203]	254	--	S254 (15)	P254 (15)	C254 (5) L254 (5)
	ALUM.	YDS43RP1		666.6 (24-7)	319	--	S319 (18)	P319 (18)	C319 (6) L319 (6)
YDS451R49RS	STEEL	YDS49RP2	795 (26-7)	10.00 [254]	419	--	S419 (21)	P419 (21)	C419 (7) L419 (7)
	ALUM.	YDS451RP1		32.50 [826]	579	--	S579 (13)	P579 (13)	C579 (6) L579 (6)
YDS45R45RS	STEEL	YDS45RP2	795 (54-7)	9.00 [229]	320	--	S320 (15)	P320 (15)	C320 (5) L320 (5)
	ALUM.	YDS45RP1		32.50 [826]	352	--	S352 (12)	P352 (12)	C352 (6) L352 (6)
YDS451R34RS	STEEL	YDS34RP2	900 (45-7)	6.25 [159]	253	--	U253 (9)	C253 (3)	L253 (3)
	ALUM.	YDS451RP1		32.50 [826]	579	--	S579	P579	C579 (6) L579 (6)
YDS49R49RS	STEEL	YDS49RP2	1033.5 (54-7)	10 [254]	419	--	--	C419 (7)	L419 (7)
	ALUM.	YDS49RP1		37.00 [940]	422	--	--	--	L422 (8)
YDS49R36RS	STEEL	YDS36RP2	1113 (45-7)	7.88 [200]	350	--	U350 (12)	C350 (4)	L350 (4)
	ALUM.	YDS49RP1		37.00 [940]	422	--	--	--	L422 (8)

CATALOG NUMBER		CONDUCTOR	L	DIE INDEX	TOOLS, DIE SET CATALOG NUMBER & (CRIMPS PER END)				
SET	SLEEVES				MD7, MD6	Y35, 750, Y45, Y46	Y48B	Y60BHU	
YDS011R	STEEL	YDS27RP2	80 (1-8)	5.25 [133]	248	W248 (16)	U248 (8)	--	--
	ALUM.	YDS011RP1		19.75 [502]	245	W245 (12)	U245 (6)	--	--
YDS251R	STEEL	YDS34RP2	101.8 (12-7)	6.25 [159]	253	--	U253 (9)	C253 (3)	L253 (3)
	ALUM.	YDS251RP1		22.25 [565]	316	--	U316 (9)	C316 (3)	L316 (3)
YDS261R	STEEL	YDS41RP2	134.6 (12-7)	8.63 [219]	305	--	U305 (9)	C305 (3)	L305 (3)
	ALUM.	YDS261RP1		22.25 [565]	316	--	U316 (9)	C316 (3)	L316 (3)
YDS271R	STEEL	YDS44RP2	159 (12-7)	8.00 [203]	255	--	U255 (12)	C255 (4)	L255 (4)
	ALUM.	YDS271RP1		25.63 [651]	317	--	U317 (12)	C317 (4)	L317 (4)

REV	DATE	DESCRIPTION	ECO	BY	C'H'K.
C	04/07/2015	DRAWING UPDATED AS PER MARKUP	39814	SV	MB

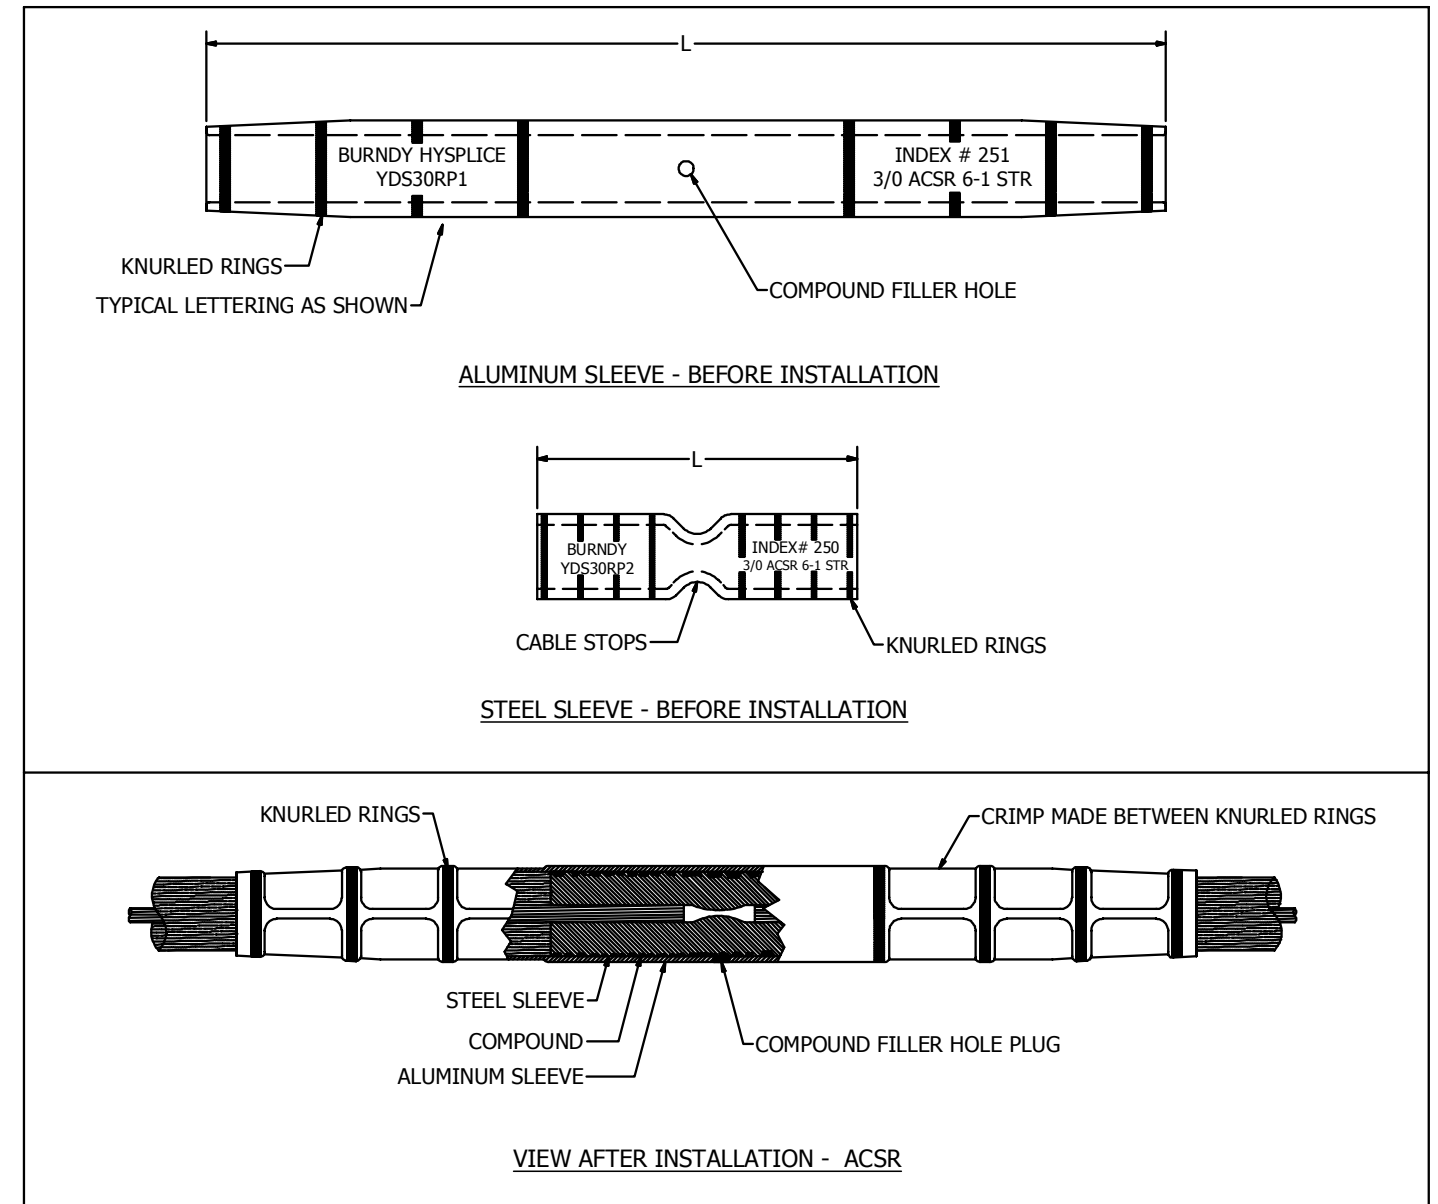

- NOTES:
- FOR INSTALLATION INSTRUCTION REFER DRAWING 30002491.
  - MULTIPLE CRIMP DIE SET; MAKES MORE THAN ONE CRIMP PER TOOL COMPRESSION FIGURE INDICATES NUMBER OF COMPRESSIONS.
  - CATALOG # PT6515 ADAPTOR IS REQUIRED TO USE "U" DIE IN Y45 SERIES TOOLS.
  - CATALOG # PUADP-1 ADAPTOR IS REQUIRED TO USE "U" DIES IN Y46 SERIES TOOLS.
  - FOR FASTER INSTALLATIONS USE BURNDY® PATRIOT FAMILY OF BATTERY TOOLS.
  - DIMENSIONS IN BRACKET [ ] ARE IN MILLIMETERS ROUNDED OFF TO THE NEAREST MILLIMETER, UNLESS OTHERWISE SPECIFIED AND ARE FOR REFERENCE ONLY.

TO ORDER BURNDY® PRODUCTS CALL		FULL TENSION HYSPLICE™	
UNITED STATES 1-800-346-4175 (LONDONDERRY, NH)		ITEM NO: N/A	
CANADA: 1-800-361-6975 (QUEBEC) 1-800-387-6487 (ALL OTHER PROVINCES)		CAT. NO: YDS-- (SEE TABLE)	
FOR PRODUCT INFO: <a href="http://www.burndy.com">http://www.burndy.com</a>		DRAWN BY: JEL 26-09-1989	
		CHECKER: MAL 25-09-1989	
		DSN APRVL: WHITEY 02-01-2014	
		MFG APRVL: J.L 28-09-1989	
		QA APRVL: CHERYAL 08-01-2014	
		MKT APRVL: JEFFERSON 09-01-2014	
		PROD FAM: --	
		PROJECT #: --	
		DOCUMENT TYPE: SALES	
		REL LEVEL: Released	
		DRAWING NO	
		SA039024-01	
		SHEET 1 OF 1	
		REV	
		C	