

INSTALLATION and MAINTENANCE INSTRUCTIONS

SZ-16 DIRECT DRIVE HAZARDOUS DUTY ELECTRIC CABLE REELS

All units are provided with right hand rotation unless otherwise specified. This means that cable is pulled off spool top left or bottom right (spool rotates clockwise to wind cable) **when viewing spring end of reel**. See diagram on parts page.

Clock-type springs provide power for automatic cable take-up. **Spring must be pretensioned at time of installation** to insure that tension is applied to cable at all times. A tension adjustment spanner wrench is provided with each reel.

⚠ WARNING



Some reels with large or multiple springs are equipped with a ratcheted adjustment wrench. Follow separate instructions for its use. Failure to use ratcheted wrench, on reels so equipped, could result in serious personal injury.

⚠ WARNING

Do not attempt to relieve spring tension using spanner wrench. Doing so may result in personal injury.

INSTALLATION

1. Insure that machinery to be serviced by reel is at position closest to reel.
2. Securely mount reel in desired position using 3/8"(M10) bolts. Be sure spool is aligned with cable run.
3. Position optional cable guide, if reel is so equipped.
4. Connect free end of cable to junction box on machine or adjust cable stop so that desired length of cable extends from reel.
5. Remove cover plate on spring housing to expose shaft and spring hub. (See Figure 1).
6. Insert spanner wrench into holes in spring hub (Fig 2). Rotate wrench counterclockwise (for standard rotation). Number of 360° turns should match last digit in model number on serial plate. *If model number includes an "R", reel is reverse rotation and wrench must be rotated clockwise.* (See EXPLANATION on parts list page.)



⚠ CAUTION

Do not exceed number of turns indicated on serial plate. Over-tensioning can cause a broken spring, sheared shaft or other damage.

NOTE: If reel is equipped with ratcheted adjustment wrench, follow instructions on separate sheet.

NOTE: On reels containing more than one spring, the hubs are connected at the factory. Therefore, by tightening the outer spring, the inside spring(s) will be tightened.

7. Remove collector cover and connect individual supply conductors to collector terminals.

MAINTENANCE

Periodically: A. Use compressed air to clean collector assembly and inside of collector housing. Inspect collector assembly for brush wear and pitted slip rings.

B. Inspect cable for wear and check mounting bolts and other hardware for tightness.




Figure 3

C. Check for broken springs by pulling about 2/3 cable off reel and observing "Broken Spring Indicators" on sides of spring canisters. See Fig. 3. **NOTE:** Bearings and springs are prelubricated and require no periodic maintenance.

SPRING REPLACEMENT

⚠ WARNING

Do not attempt to remove spring from its housing. Clock-type springs can be dangerous to handle. Removal of spring from housing could result in personal injury.

The unique SAFETYCHANGE® spring motor consists of a spring and hub sealed within a housing. A replacement spring is supplied sealed in its housing and the old unit should be discarded completely.

1. Turn off all electric power.
2. Disconnect cable from machine junction box.
3. Wind all cable onto reel to relieve all spring tension.
4. Remove inspection cover from face of spring housing.
5. Rotate spool clockwise and observe inner shaft. Shaft should rotate clockwise and hub (with spring attached) should remain stationary.


NOTE: Do not attempt to remove spring if resistance is met or hub tends to rotate with shaft.

Continue to rotate spool and strike end of shaft several sharp blows with a lead hammer or rubber mallet until shaft rotates freely and hub remains stationary.

6. Remove (4) nuts which secure spring motor(s) to frame.
7. Slide spring motor(s) off shaft and discard.

NOTE: On multi-spring reels, be sure to remove and **save** dowel pins which connect one spring hub with another. Also remove snap rings on shaft between spring housings.

8. Install replacement spring motor(s), pawls and pawl springs. **NOTE:** Pawl springs must be located between the pawls and the deepest section of the shaft grooves. Make sure that pawls and pawl springs are inserted flush with ends of shaft and hub or they may rub against inspection cover.

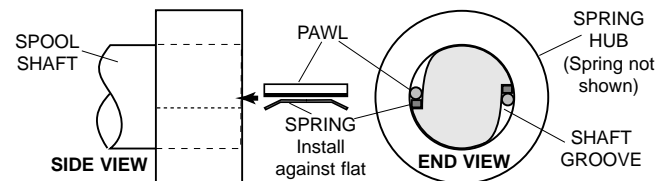


9. Tighten nuts (and extension bolts) securing spring housing(s) to reel frame.
10. Connect free end of cable to junction box on machine or adjust cord stop so that desired length of cord extends from reel.
11. Tension spring with spanner wrench. Refer to **INSTALLATION** section.
12. Replace inspection cover.

CONTINUED ON BACK PAGE →


ILLUSTRATED PARTS LIST

SZ-16 DIRECT DRIVE HAZARDOUS DUTY ELECTRIC CABLE REELS


Always specify **SERIAL NUMBER & MODEL NUMBER** when ordering parts. If **COLLECTOR ASSEMBLY (Item 22)** was CSA approved, so advise factory when ordering parts.

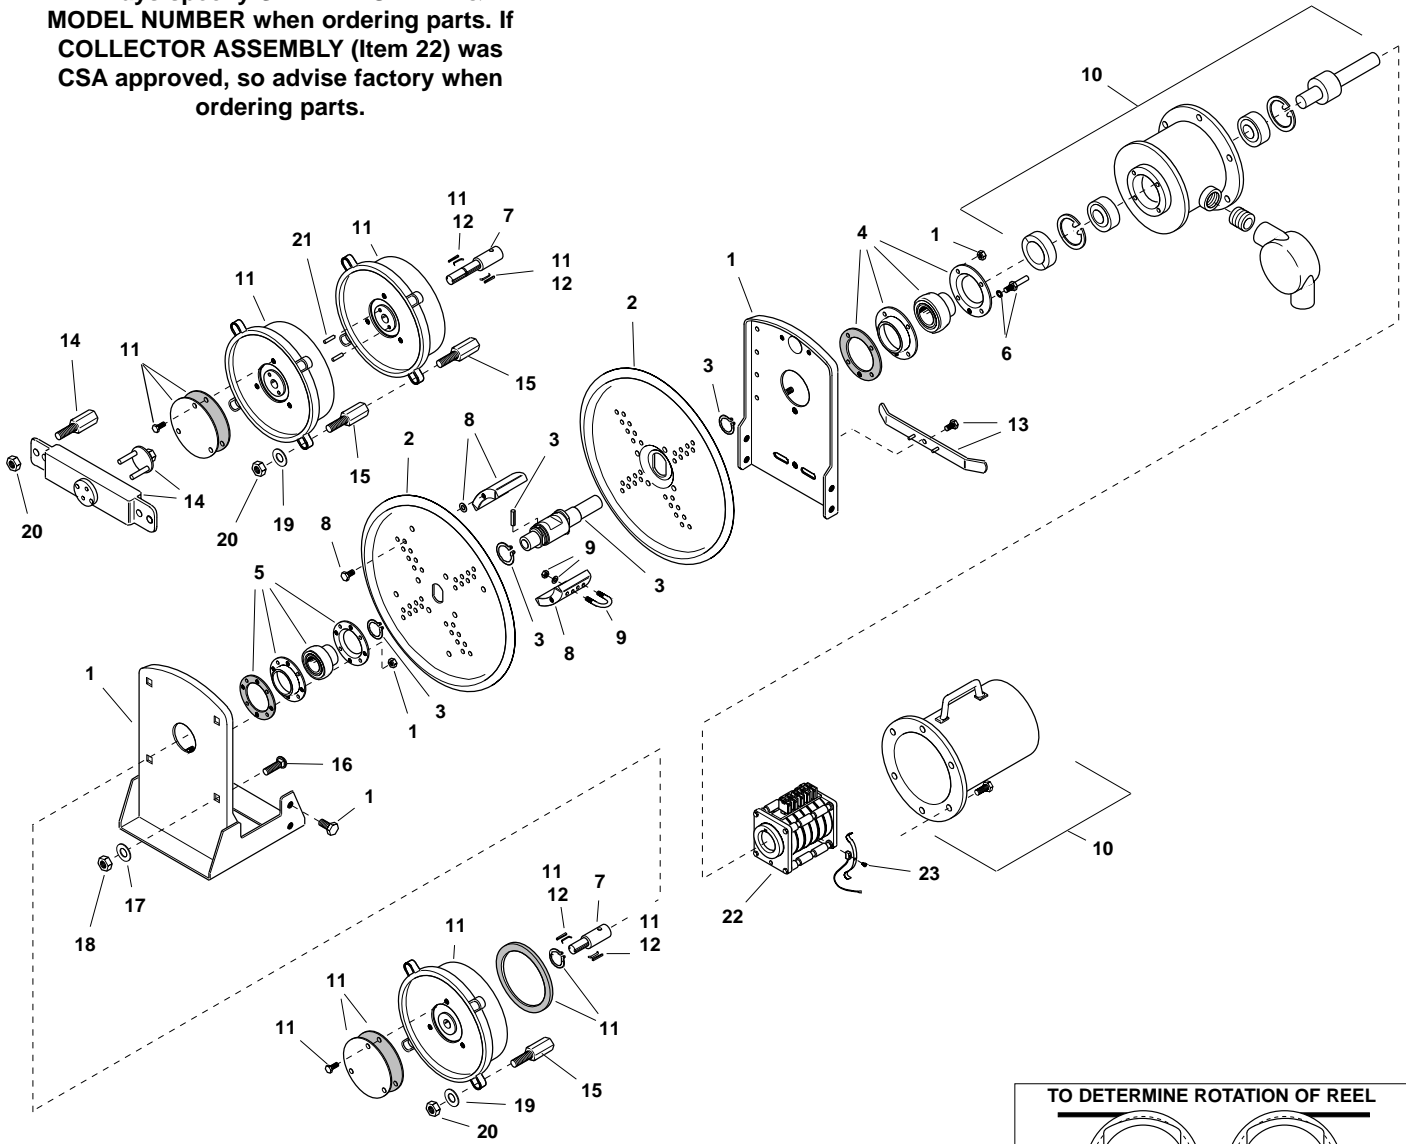

TO DETERMINE ROTATION OF REEL



**STANDARD
ROTATION**



**REVERSE
ROTATION**

Cable is payed out and retracted as shown when viewing reel from spring motor side.

SZ-16 DIRECT DRIVE HAZARDOUS DUTY CABLE REEL REPLACEMENT PARTS LIST

NOTE: Applicable mounting hardware included with each kit.

ITEM	KIT NO.	DESCRIPTION	QTY.	ITEM	KIT NO.	DESCRIPTION	QTY.
1	01239101	Frame Assembly	1	12	012425	Pawl Kit (35, 60 Springs) (Includes 2 pawls and springs)	ar
2	012404	Discs (Set of two)	1	12	012426	Pawl Kit (62, 75, 80 Springs)	ar
3	01239701	Main Shaft Assembly (Includes drive pin and retaining rings)	1	12	012427	Pawl Kit (100 Springs)	ar
4	012402	Bearing Kit--2" Bore (Includes housing and gasket)	1	13	017190	Spanner Wrench (35 – 80 Springs)	1
5	012401	Bearing Kit--1.75" Bore (Includes housing and gasket)	1	13	017191	Spanner Wrench (100 Springs)	1
6	012456	Drive Stud Kit	1	14	032805	Ratchet Wrench Kit (75, 80 Springs) (Includes mounting bolts)	1
7	012208	Stub Shaft, Std. Rotation (351, 601)	1	14	032804	Ratchet Wrench Kit (100 Springs)	1
7	01220801	Stub Shaft, Rev. Rotation (351, 601)	1	15	017054	Extension Bolts (35 – 80 Springs) (4 bolts per kit--less hardware)	ar
7	012209	Stub Shaft, Std. Rot. (621, 751, 801)	1	15	017055	Extension Bolts (100 Springs)	ar
7	01220901	Stub Shaft, Rev. Rot. (621, 751, 801)	1	16	016182	Carriage Bolt, .50--13 x 1.5	ar
7	012210	Stub Shaft, Std. Rot. (622, 752, 802)	1	17	021291	Lockwasher, .56 Med., Z.P.	ar
7	01221001	Stub Shaft, Rev. Rot. (622, 752, 802)	1	18	100959	Hex Nut, .50--13, Z.P.	ar
7	012211	Stub Shaft, Std. Rot. (623, 753, 803)	1	19	101211	Flat Washer, .50	ar
7	01221101	Stub Shaft, Rev. Rot. (623, 753, 803)	1	20	P06-03	ESNA Lock Nut, .50--13, Z.P.	ar
7	012212	Stub Shaft, Std. Rot. (624, 754, 804)	1	21	021762	Hub Lock Pins (100 Springs)	ar
7	01221201	Stub Shaft, Rev. Rot. (624, 754, 804)	1	21	021761	Hub Lock Pins (All Other Springs)	ar
7	012213	Stub Shaft, Std. Rotation (1001)	1	22	012285	Collector Assembly, 2 Pole, 35 Amp	1
7	01221301	Stub Shaft, Rev. Rotation (1001)	1	22	012286	Collector Assembly, 3 Pole, 35 Amp	1
7	012214	Stub Shaft, Std. Rotation (1002)	1	22	012287	Collector Assembly, 4 Pole, 35 Amp	1
7	01221401	Stub Shaft, Rev. Rotation (1002)	1	22	012288	Collector Assembly, 6 Pole, 35 Amp	1
7	012371	Stub Shaft, Std. Rotation (1003)	1	22	012289	Collector Assembly, 8 Pole, 35 Amp	1
7	01237101	Stub Shaft, Rev. Rotation (1003)	1	22	012290	Collector Assembly, 10 Pole, 35 Amp	1
7	014619	Stub Shaft, Std. Rotation (1004)	1	22	012291	Collector Assembly, 12 Pole, 35 Amp	1
7	01461901	Stub Shaft, Rev. Rotation (1004)	1	22	012292	Collector Assembly, 14 Pole, 35 Amp	1
8	012416	Wrapper Kit--5" Wide, 8" to 14" Dia. (Includes 4 wrapper sections)	1	22	012293	Collector Assembly, 16 Pole, 35 Amp	1
8	012417	Wrapper Kit--5" Wide, 15" to 20" Dia. (Includes 8 wrapper sections)	1	22	012294	Collector Assembly, 20 Pole, 35 Amp	1
9	012444	Cable Clamp Kit .38--.74 Dia. Cable (U-bolt with lockwashers and hex nuts)	1	22	012295	Collector Assembly, 24 Pole, 35 Amp	1
9	012445	Cable Clamp Kit .75--1.11 Dia. Cable	1	22	012296	Collector Assembly, 30 Pole, 35 Amp	1
9	012446	Cable Clamp Kit 1.12--1.50 Dia. Cable	1	22	012297	Collector Assembly, 36 Pole, 35 Amp	1
10	03303901	Enclosure Assembly 2, 3, 4 pole/35 Amp collectors	1	22	012298	Collector Assembly, 2 Pole, 75 Amp	1
10	03303902	Enclosure Assembly 4, 6 p/35A; 2,3,4p/75A; 2p/125A; 2p/200A collectors	1	22	012299	Collector Assembly, 3 Pole, 75 Amp	1
10	03303903	Enclosure Assembly 10, 12p/35A; 6p/75A; 3p/125A collectors	1	22	012300	Collector Assembly, 4 Pole, 75 Amp	1
10	03303904	Enclosure Assembly 14, 16p/35A; 8p/75A; 4p/125A collectors	1	22	012376	Collector Assembly, 6 Pole, 75 Amp	1
10	03303905	Enclosure Assembly 20, 24pole/35Amp collectors	1	22	012377	Collector Assembly, 8 Pole, 75 Amp	1
10	03303906	Enclosure Assembly 30, 36 pole/35 Amp collectors	1	22	037194	Collector Assembly, 2 Pole, 125 Amp	1
11	017041	Spring Motor Kit, Std. Rot.--35 (Includes pawl, pawl springs, cover, gaskets, and snap ring)	ar	22	037294	Collector Assembly, 3 Pole, 125 Amp	1
11	017042	Spring Motor Kit, Rev. Rot.--35	ar	22	037295	Collector Assembly, 4 Pole, 125 Amp	1
11	017043	Spring Motor Kit, Std. Rot.--60	ar	22	012304	Collector Assembly, 2 Pole, 200 Amp	1
11	017044	Spring Motor Kit, Rev. Rot.--60	ar	23	012440	Brush Kit (35 Amp) (Each kit includes 4 brushes and 4 fingers)	ar
11	017045	Spring Motor Kit, Std. Rot.--62	ar	23	012441	Brush Kit (75 Amp)	ar
11	017046	Spring Motor Kit, Rev. Rot.--62	ar	23	012443	Brush Kit (125 Amp/200 Amp)	ar
11	017047	Spring Motor Kit, Std. Rot.--75	ar	n.s.	02180901	Seal Kit (Use to install cable)	1
11	017048	Spring Motor Kit, Rev. Rot.--75	ar				
11	017049	Spring Motor Kit, Std. Rot.--80	ar				
11	017050	Spring Motor Kit, Rev. Rot.--80	ar				
11	017051	Spring Motor Kit, Std. Rot.--100	ar				
11	017052	Spring Motor Kit, Rev. Rot.--100	ar				

⚠ WARNING

Failure to carefully follow instructions in Seal Kit could result in reel that does not meet Hazardous Duty Certification.

NOTE:
Please consult factory for optional accessories: roller guides, ratchet lock, limit switch, hoop guides, spool lock, and swivel base. **If Collector Assembly was CSA approved, so advise factory when ordering parts.**

MODEL NUMBER EXPLANATION



INDICATES REVERSE ROTATION.
NO LETTER INDICATES STANDARD ROTATION.

AMPACITY

CODE	AMPS
3	35
7	75
12	125
20	200

CABLE INSTALLATION & REMOVAL

Use the procedure detailed on HAZARDOUS DUTY CABLE REEL SEALING INSTRUCTIONS (bulletin 039789) which comes with sealing kit (available separately).

⚠ CAUTION

Carefully read and follow instructions supplied with separate sealing kit as well as instructions for sealing compound. Failure to properly follow those instructions could result in damage to equipment, personal injury or death.


CABLE REMOVAL

⚠ CAUTION

Always open all breakers and disconnect electrical power to reel. Failure to turn off electrical power could lead to serious injury or death.

1. Move machine serviced by reel to a position closest to reel. Springs will still be under pre-tension at this point.
2. Turn off all power to reel.
3. Remove collector cover and gasket.
4. Disconnect electric leads to and from collector.
5. Follow Steps 3–9, REMOVING OLD CABLE, on bulletin 039789.

CABLE INSTALLATION REFERENCE DRAWING

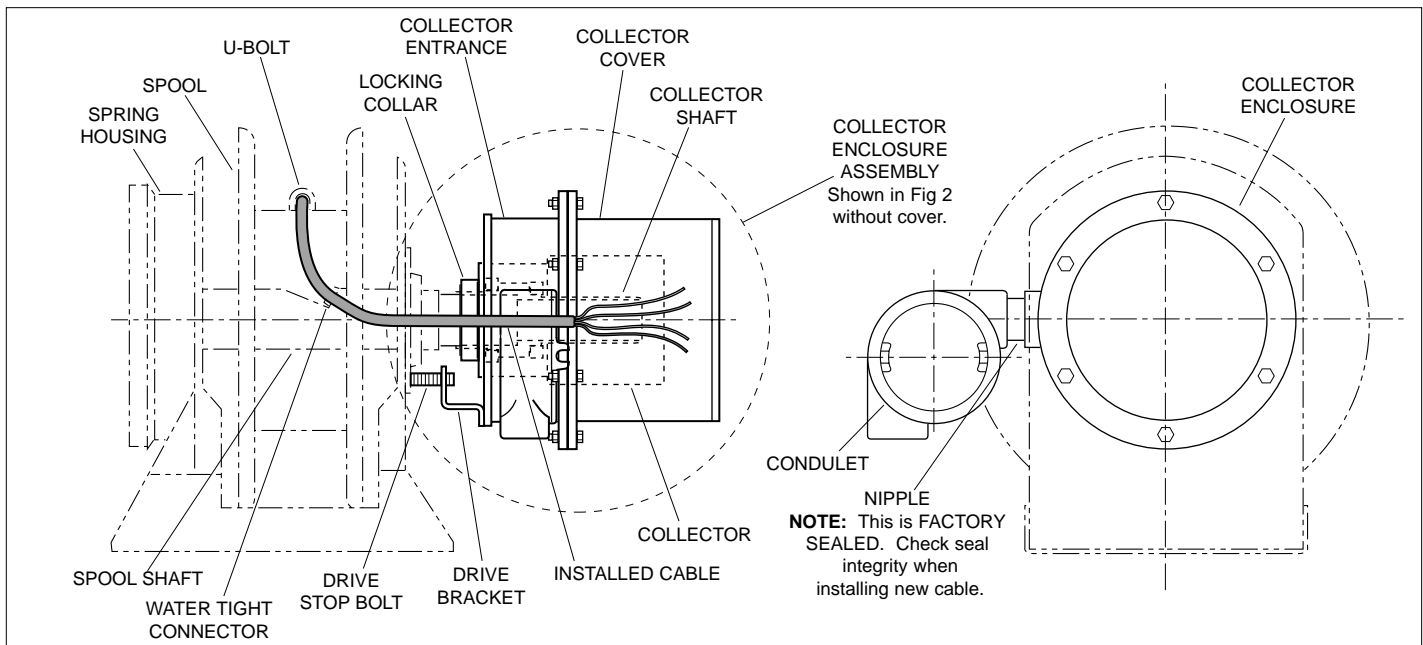

GLEASON REEL CORP.
600 South Clark St.
Mayville, WI 53050-0026
Phone 920-387-4120 • Fax 920-387-4189