



CWW

CONTEMPORARY LED
WALL WASH

Columbia
LIGHTING



HUBBELL
Lighting

Features and Benefits

Simple. High performance. Optimal design.

CWW offers a unique approach to indirect LED lighting with its slender profile and application flexibility. With multiple distributions and mounting configurations, designing for wall wash applications has never been easier.



Housing

Narrow and lightweight housing is cleverly designed for structural integrity and durability.

Lens

High performance optics features linear prisms designed for excellent uniformity and vertical illumination without LED pixelation.

Finish

Architectural matte white finish standard for an enhanced architectural aesthetic.

Easy Installation

Electrical components are fully accessible from below the ceiling for true sustainability, maintenance and upgrades.

Options

Wide choice of distributions, lumen packages and mounting configurations to maximize design flexibility.



Emergency Solutions

Emergency equipped luminaires are labeled and CSA certified to meet UL 924 requirements.




Max/Min (Uniformity)	5.4:1
Average fc	19
Product	CWW4-35MWG-1WW
Lumens	3,593
Watts	34.9
Room	14' Long, 9' High
Luminaires	Two 4'
Setback	3'

Distribution Options

CWW offers three highly effective light distribution options in a narrow, 4" wide linear recessed luminaire. 80 CRI standard and 90 CRI optional.


Asymmetric CWW-1WW

Wall wash asymmetric illumination for artwork, signage and architectural features.

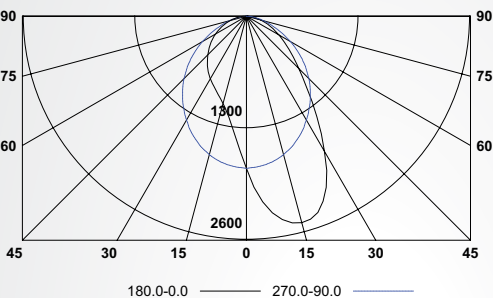


Asymmetric Room Side CWW-1WR

Provides wall wash with additional room side illumination; may reduce supplemental lighting requirements.

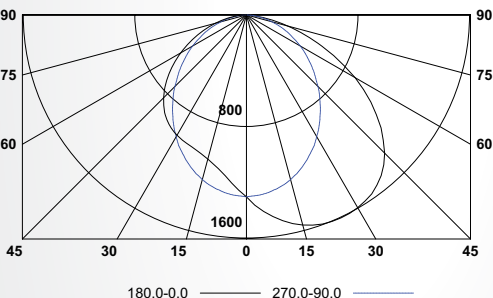

Double Wall Wash CWW-2WW


Double asymmetric illumination provides light for hallways, corridors, passageways and other narrow spaces.

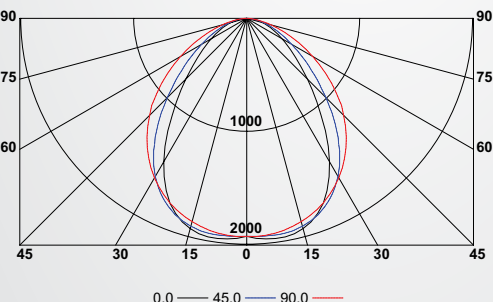




Grid

Luminaire sits on flat T-Bar ceiling structure.

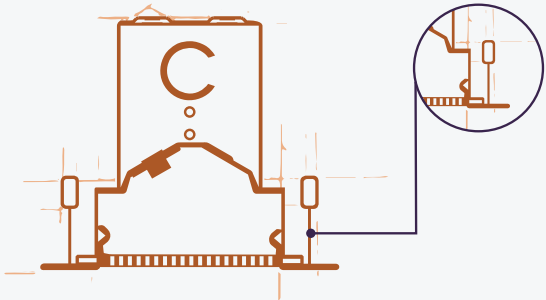


Slot Grid

Luminaire sits on elevated T-Bar; fixture is placed at the bottom (room side) of the T-Bar.

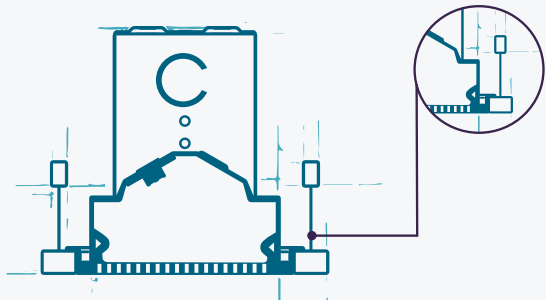

Drywall

Recessed housing with attractive metal frame. See instruction sheet for framing instructions.

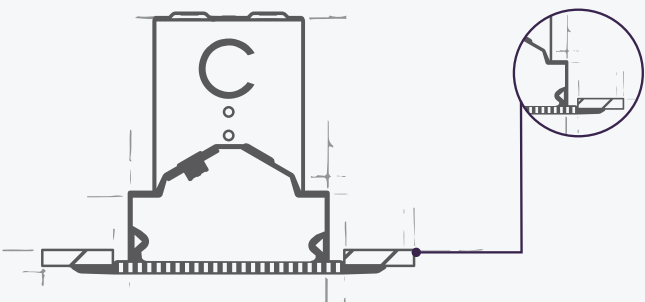

Ordering Information

Example: CWW4-40MLG-2WW-EDU

CWW					
Model	Size	CRI	Color Temp	Nominal Lumens	Ceiling Type
CWW	2 2'	Blank >80	30 3000K	XW Extra Low Watt	G Grid
Contemporary	4 4'	9 >90 ¹	35 3500K	VW Very Low Watt	SG Slot Grid
LED Wall Wash			40 4000K	MW Medium Low Watt	F Drywall Flange
			50 5000K	LW Low Watt ^{6,7}	
				ML Medium Lumen ^{5,7}	
Distribution	Driver	Voltage	Options		
1WW Asymmetric Wallwash	E Fixed Output	U 120V-277V	ELL14 Emergency Battery Pack, 1400 Lumens ^{2,3,8}		
1WR Asymmetric Wallwash with Roomside	ED 0-10V Dimming	347 347V	C388 3-Wire Flex		
2WW Double Wallwash	ED1 0-10V 1% Dimming		C488 4-Wire Flex		
	ESD Step Dimming ^{2,4}		C588 5-Wire Flex		
	LUTH 5-Series EcoSystem LED driver ^{2,3,4}		GLR Fast Blow Fuse		
			CP Chicago Plenum		

Notes:
1 Not available with 2' 347V & LUT drivers
2 Not available in 347V
3 For compatibility with Dual-Lite inverters, contact Hubbell Lighting Representative.
4 ESD and LUTH not compatible with 2' Drywall Flange (F) option.
5 Not compatible with thru wiring configuration.
6 Lumen package not available with ELL14 Emergency backup in 2' configuration
7 Lumen package not available with ELL14 Emergency backup in 4' configuration
8 Not available with 2' drywall flange (F) option
For questions about configuration options, contact Hubbell Representative

PRODUCT AVAILABILITY				
Size	Lumen Package	Nominal Lumens	Nominal Watts	Lumens Per Watt
2	VW	1370-1539	15	90-106
	MW	1788-2067	20	87-102
	LW	2456-2806	27	91-103
4	XW	2554-2880	25	100-114
	VW	3119-3523	31	103-114
	MW	3430-3906	35	98-111
	LW	3901-4645	40	98-116
	ML	4712-5458	50	95-106
Nominal lumen range represents 3000K through 5000K. Lumens vary according to color temperatures, optics, and other factors. See photometric test(s).				



ALERA LIGHTING

ARCHITECTURAL AREA LIGHTING

BEACON PRODUCTS

COLUMBIA LIGHTING

COMPASS

DUAL-LITE

HUBBELL CONTROL SOLUTIONS

HUBBELL OUTDOOR LIGHTING

KIM LIGHTING

KURT VERSEN

LITECONTROL

PRESCOLITE

Columbia
LIGHTING

701 Millennium Blvd. Greenville, SC 29607
Tel 864.678.1000
www.columbialighting.com

co1097 Modified June 24, 2022

Copyright © 2022 Columbia Lighting, a division of Hubbell Lighting, Inc. All rights reserved. Please refer to online specifications for most up-to-date content as specifications are subject to change without notice.