


KEMLUX III LED SERIES
SEVERE LOCATION

KEMLUX III

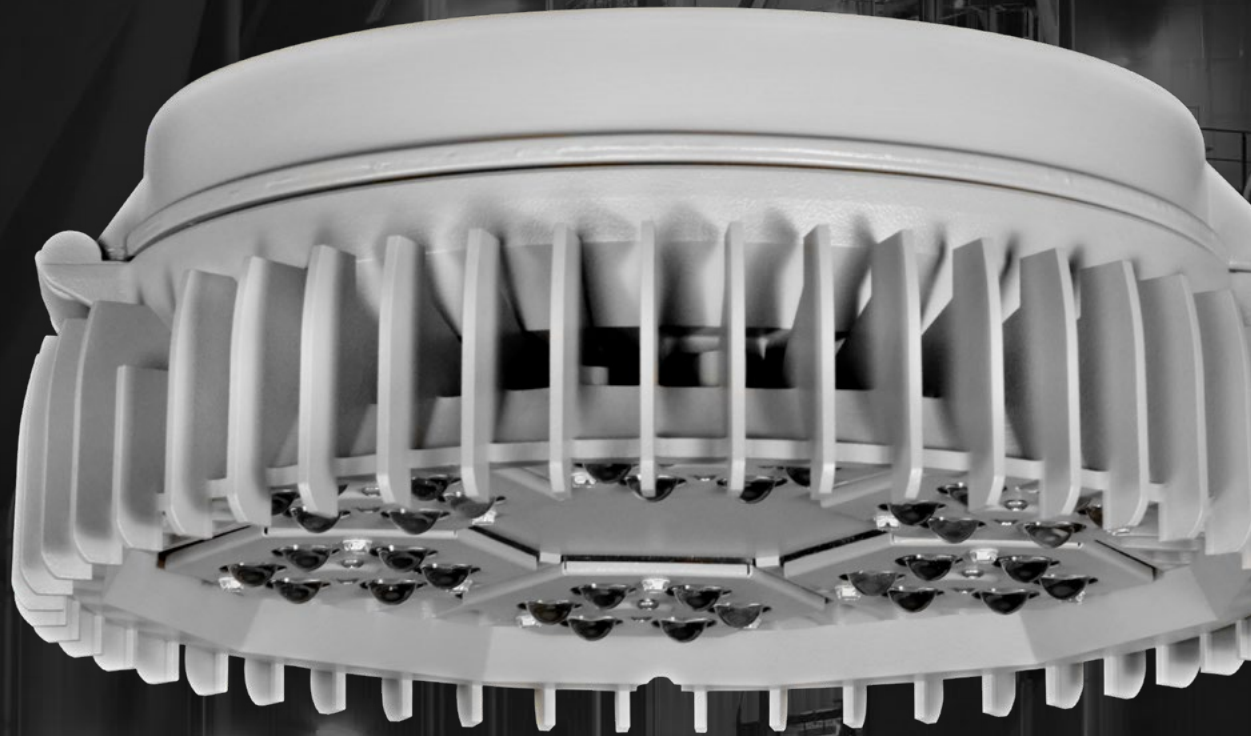


UP TO 105 LUMENS PER WATT
MOUNTING FLEXIBILITY WITH SIX DIFFERENT MOUNTING OPTIONS
RETROFITABLE TO OLD KEMLUX III KS INSTALLATIONS
LOW COPPER ALLOY (<0.04% CU) CASTING
WELL SEALED, WET LOCATION DESIGN

HUBBELL®
Industrial Lighting




HUBBELL
Lighting



- Ideal for efficiently and economically lighting corrosive and harsh applications
- Copper-free (<0.4%) aluminum housing and cover with tan Lektrocoote® powder polyester paint finish provides excellent corrosion resistance from most chemicals
- Modular design permits selection of 6 mounting options and housing for application flexibility
- Sealed optic for long life and UL 1598 Wet Location Listing
- 40 °C Ambient listed
- Individually engineered LED optics providing optimally controlled and evenly distributed light
- Multiple LED configurations: 18, 24 and 36 LEDs on up to six individual light engines providing fail-safe redundancy
- Three distinct light distributions: Type V square, Type V rectangle and Narrow
- High output LEDs deliver up to 105 lumens per watt
- Minimum operating temperature of -40 °C
- Five Year Warranty

SPECIFICATIONS INFORMATION

ORDERING EXAMPLE: **KSL-36L-U-5K-N-C-2-TN-WG-WIH**

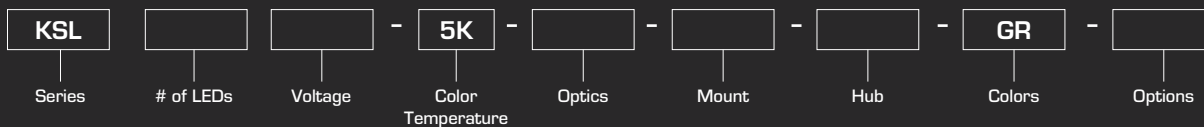

| SERIES | COLOR TEMPERATURE | HUB | OPTIONS |
|---|--|--|--|
| KSL Kemlux III LED | 5K 5000° Kelvin | 2 3/4" Available with A, C, X Mount | WIH Wireless Control System |
| NUMBER OF LEDS | OPTICS | 3 1" Available with A, C, X Mount | SC70 70% Output dimmed/ 30% Energy savings |
| 18L 18 High Performanc LEDs (43 watts) | 5M Type V Square | 4 1 1/4" Available with S, D Mount | SC50 50% Output dimmed/ 50% Energy savings |
| 24L 24 High Performanc LEDs (57 watts) | 5R Type V Rectangle | 5 1 1/2" Available with S, D Mount | SC30 30% Output dimmed/ 70% Energy savings |
| 36L 36 High Performanc LEDs (86 watts) | N Narrow | COLORS | SC0 No light output when dimmed/ ON/OFF Control |
| VOLTAGE | MOUNT | WH White | F(x) Fusing ¹ |
| U 120 - 277 | A Pendant | GR Gray | P1 Photo cell factory 120V ² |
| 1 120 | B Wall Bracket | | P2 Photo cell factory 208-277V ² |
| 2 208 | C Cone | | P3 Photo cell factory 347V ² 2S2 |
| 3 240 | D Stanchion 25° | | |
| 4 277 | N None (Mount ordered separately) | | |
| 5 480 | S Straight stanchion | | |
| F 347 | X Ceiling | | |
| | Y Yoke Mount | | |
| | ACCESSORIES (Order as separate part #) | | |
| | WG Wire Guard | | |

Notes:
 1. Fusing 1-120V, 2-208V, 3-240V, 4-277V, 6-347V
 2. Must specify voltage on order
 3. Available only with A, B, D and S mounting options



PHOTOMETRY

