




## **9020R + 252SCM + 818HAMR /2G Hinged Adjustable Mud Ring/16" Studs**

By Raco  
Catalog # [FW5.7.16](#)

9020R + 252SCM + 818HAMR /2G Hinged Adjustable Mud  
Ring/16" Studs

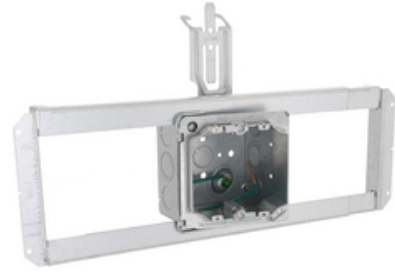

## Features

- Ready to install, no preparation required
- For use on wood or metal studs
- Designed and assembled in USA
- Includes Hinged Adjustable Mud Rings for increased productivity

## General

Application Save labor costs on any job with RACO Pre-Fab assemblies. All components come pre-assembled, ready to install right out of the box. Electrical boxes, mounting brackets, cable management and mud rings. Ensure quality while reducing material and labor costs. Even reduce jobsite packaging waste.

These Assemblies feature 4" boxes with integrated STAB-iT® connectors for advanced fast, secure installation of MC cables. Contractor-proven to install MC in just 1/3 the time! These boxes also include Hinged, Adjustable Mud Rings, built-in cable management clip and 8" solid #12 pigtail. Models with a second box for power and data applications include a standard 4" box with additional knockouts.

Cable Clamps	2
Drawn or Welded	Welded
Knockouts	(7) 1/2", (4) 1/2 - 3/4" TKO
Material	Steel
Number of Gang(s)	2-Gang
UPC	050169928042
Wiring System	Multiple

## Dimensions

Cubic Capacity	30.3 cu.in
Raised Ground	Yes
Raised Height	1/2 in - 1-3/8 in

## Certifications And Compliance

Certified Listed	UL Listed
------------------	-----------

## Logistics

Carton Quantity	6
Pallet Quantity	180

## Product Assets

[Brochures - Product Solutions for Electrical Prefabrication](#)  
[Catalogs - RACO / TayMac / Bell Full Catalog](#)  
[Installation Manuals - Installation Instructions for FW Series 4" Sq Stab-iT® Wall Assemblies](#)  
[Sell Sheets - 4" STAB-iT Box Assemblies for Pre-Fab](#)



A Hubbell brand