Platforms

Aluminum Platforms

Better than steel or wood platforms for mounting transformers, regulators, switches and heavy equipment.

- 1. Easier handling, storage and transporting
- 2. Easier installation
- 3. Easier adjustment
- 4. Lower installed cost
- 5. Maintenance free
- 6. Comes assembled or unassembled
- 7. Built-in safety factors
- 8. High strength 6061-T6 aluminum alloy
- 9. Platforms can be used for grounding
- 10. Available in different load ratings
- 11. Custom platforms available to meet special needs

CMC[®] recommended loading data contained herein should be used only by trained, skilled technical persons. The customer is cautioned that the loading data is published only for general information in platform selection and should be used only by qualified persons. Loads listed are within the aluminum associations allowable stress design method for 6061-T6 aluminum alloy.

Loading information is provided as general information to be used for preliminary selection of platforms and should be used only by qualified persons. The allowable loads are based on supported transformer loads only, and do not include location specific conditions such as wind or seismic loading. Installations that are subject to seismic, wind, or other unusual loading demands should be evaluated by a qualified person. Ratings for specific installations can be provided by CMC. Load ratings shown represent platform capacity only and may be limited by supporting pole and/ or platform connections to the supporting pole, which should be evaluated by a qualified person. The use of extra pole kits can significantly increase the load carrying capacity of the platforms.


CMC platforms may be combined to obtain quantity prices. All aluminum parts and galvanized steel bolts, nuts and lock washers for assembling the platforms are included. Hardware for attaching the platforms to the poles is not provided. Custom additional platforms are available.


PLATFORMS ARE SHIPPED ASSEMBLED AND ON WHEELS (standard). Add suffix "-UNA" to catalog number to order a UNassembled platform.

We do not supply the wood for the walkways.



HEAVY DUTY PLATFORM

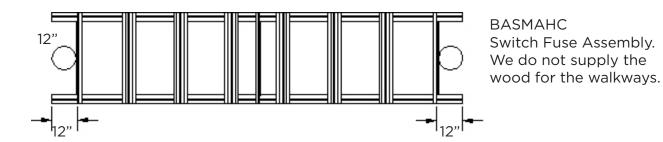

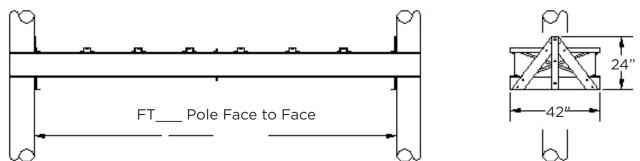

Based on:

- Two beams, each simply supported 12" from each end.
- Type 6061-T6 aluminum alloy extrusion (typical modulus of elasticity 10,000,000 psi).
- Loads equally spaced between poles.
- Catalog number feet notation equals distance between pole face to pole face for all platforms.

For technical details of special applications call your sales representative.

Vertical Load Capacity


		L			, <u> </u>	
Catalog Number	Walkway	Poles	Uniform Vertical Load (lbs)	Center Vertical Load (lbs)	Three Vertical Load (lbs)	
BP-122	None	2	8,000	5,000	2,000	
BP-122-wky	1	2	8,000	5,000	2,000	
BP-122-2wky	2	2	8,000	5,000	2,000	
BP-142	None	2	6,000	4,000	1,800	
BP-142-wky	1	2	6,000	4,000	1,800	
BP-142-2wky	2	2	6,000	4,000	1,800	
BP-162	None	2	5,000	3,100	1,400	
BP-162-wky	1	2	5,000	3,100	1,400	
BP-162-2wky	2	2	5,000	3,100	1,400	

PLATFORMS ARE SHIPPED ASSEMBLED (standard).


Add suffix "-UNA" to catalog number to order a UNASSEMBLED platform.



EXTRA HEAVY DUTY PLATFORM 42" WIDE

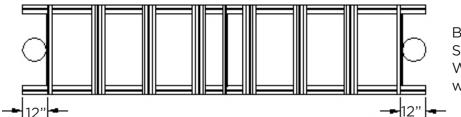

BASMAHC Switch Fuse Assembly. We do not supply the wood for the walkways.

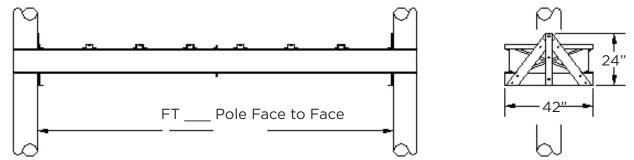

Based on:

- Two beams, each simply supported 12" from each end.
- Type 6061-T6 aluminum alloy extrusion (typical modulus of elasticity 10,000,000 psi).
- Loads equally spaced between poles.
- Catalog number feet notation equals distance between pole face to pole face for all platforms.


For technical details of special applications call your sales representative.

				Vertical L	oad Capacity
Catalog Number	Walkway	Poles	Uniform Vertical Load (lbs)	Center Vertical Load (lbs)	Three Vertical Load (Ibs)
BPHD-142	None	2	14,000	7,500	4,600
BPHD-142-wky	1	2	14,000	7,500	4,600
BPHD-142-2wky	2	2	14,000	7,500	4,600
BPHD-162	None	2	14,000	7,500	4,600
BPHD-162-wky	1	2	14,000	7,500	4,600
BPHD-162-2wky	2	2	14,000	7,500	4,600
BPHD-182	None	2	14,000	7,500	3,700
BPHD-182-wky	1	2	14,000	7,500	3,700
BPHD-182-2wky	2	2	14,000	7,500	3,700


PLATFORMS ARE SHIPPED ASSEMBLED (standard).

Add suffix "-UNA" to catalog number to order a UNASSEMBLED platform.



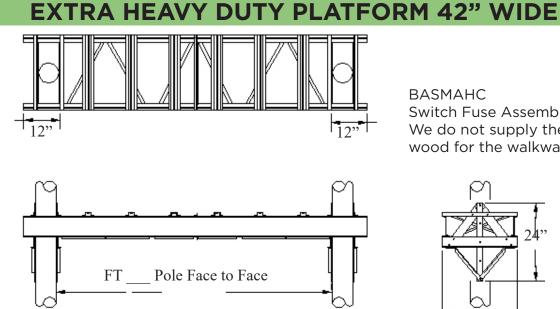

BASMAHC Switch Fuse Assembly. We do not supply the wood for the walkways.



Based on:

- Two beams, each simply supported 12" from each end. •
- Type 6061-T6 aluminum alloy extrusion (typical modulus of elasticity -• 10,000,000 psi).
- Loads equally spaced between poles.
- Catalog number feet notation equals distance between pole face to pole face for all platforms.

				Vertical Load Capacity		
Catalog Number	Walkway	Poles	Uniform Vertical Load (lbs)	Center Vertical Load (Ibs)	Three Vertical Load (lbs)	
BPEHD-142	None	2	22,000	10,000	6,220	
BPEHD-142-wky	1	2	22,000	10,000	6,220	
BPEHD-142-2wky	2	2	22,000	10,000	6,220	
BPEHD-162	None	2	17,742	10,000	4,667	
BPEHD-162-wky	1	2	17,742	10,000	4,667	
BPEHD-162-2wky	2	2	17,742	10,000	4,667	
BPEHD-182	None	2	13,813	8,633	3,700	
BPEHD-182-wky	1	2	13,813	8,633	3,700	
BPEHD-182-2wky	2	2	13,813	8,633	3,700	
BPEHD-202	None	2	11,058	6,911	2,909	
BPEHD-202-wky	1	2	11,058	6,911	2,909	
BPEHD-202-2wky	2	2	11,058	6,911	2,909	


For technical details of special applications call your sales representative.

PLATFORMS ARE SHIPPED ASSEMBLED (standard).

Add suffix "-UNA" to catalog number to order a UNASSEMBLED platform.



SUPER EXTRA HEAVY DUTY PLATFORM 48" WIDE

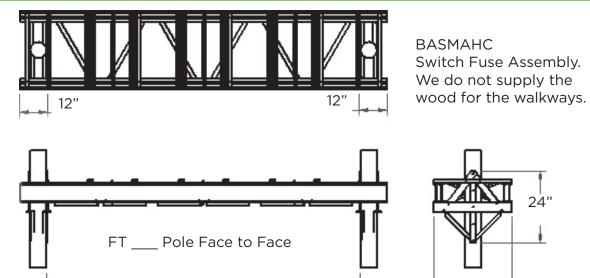

Based on:

- Two beams, each simply supported 12" from each end. •
- Type 6061-T6 aluminum alloy extrusion (typical modulus of elasticity -• 10,000,000 psi).
- Loads equally spaced between poles.
- Catalog number feet notation equals distance between pole face to pole face for all platforms.

Vertical Load Capacity

48"

24"

Catalog Number	Walkway	Poles	Uniform Vertical Load (lbs)	Center Vertical Load (Ibs)	Three Vertical Load (Ibs)
BPSEHD-142	None	2	33,000	20,000	10,400
BPSEHD-142-wky	1	2	33,000	20,000	10,400
BSPEHD-142-2wky	2	2	33,000	20,000	10,400
BPSEHD-162	None	2	21,000	18,000	9,334
BPSEHD-162-wky	1	2	31,000	18,000	9,334
BPSEHD-162-2wky	2	2	31,000	18,000	9,334
BPSEHD-182	None	2	27,262	17,266	7,266
BPSEHD-182-wky	1	2	27,262	17,266	7,266
BPSEHD-182-2wky	2	2	27,262	17,266	7,266
BPSEHD-202	None	2	22,116	13,822	5,818
BPSEHD-202-wky	1	2	22,116	13,822	5,818
BPSEHD-202-2wky	2	2	22,116	13,822	5,818
BPSEHD-222	None	2	18,104	11,314	4,762
BPSEHD-222-wky	1	2	18,104	11,314	4,762
BPSEHD-222-2wky	2	2	18,104	11,314	4,762


PLATFORMS ARE SHIPPED ASSEMBLED (standard).

Add suffix "-UNA" to catalog number to order a UNASSEMBLED platform.




12/2024

PLATFORMS CONT.

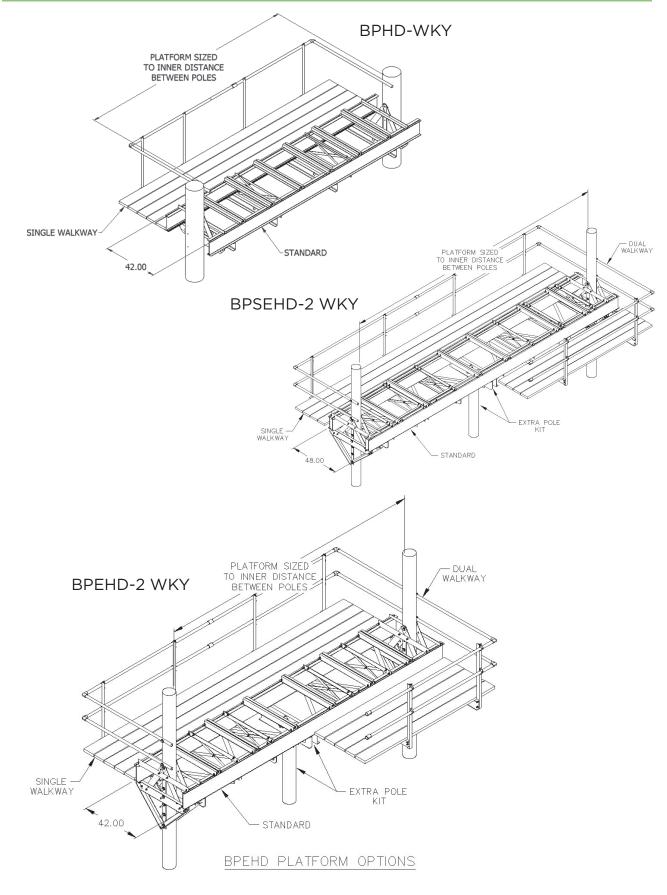




ALUMINUM EXTRA POLE KITS

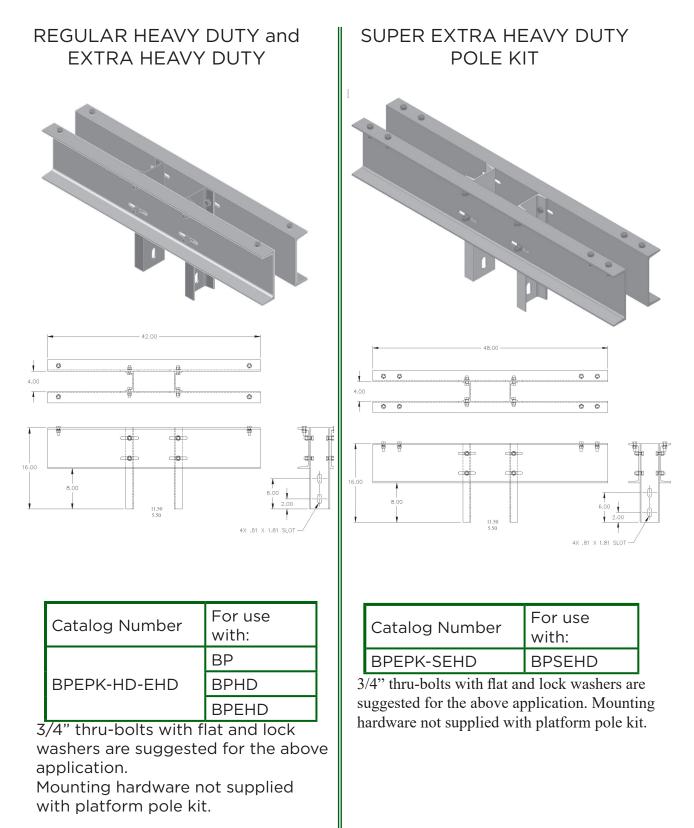



TIE DOWN KIT

BATTDK - Tie Down Kit

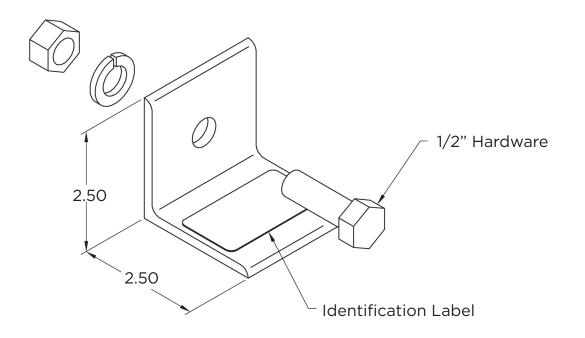

One kit per transformer or recloser is necessary.

