


Z-Wave In-wall Smart Switch

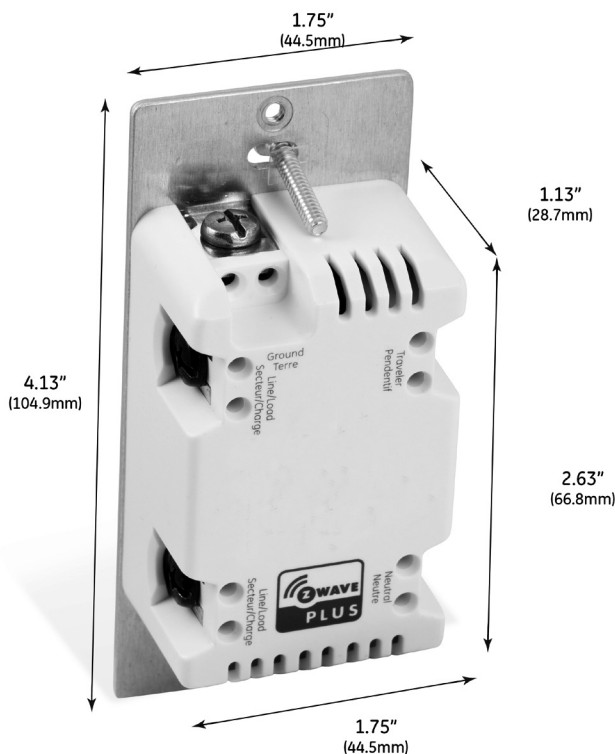

Specifications

- Power:** 120VAC, 60Hz
- Signal Frequency:** 908.4/916MHz
- Maximum Load:** 960W Incandescent, 1/2 HP Motor 1800W (15A Resistive)
- Range:** Up to 150 feet from controller or closest Z-Wave device
- Operating Temperature:** 32-104° F (0-40° C)
- Warranty:** 5-year limited product warranty
- Requires neutral wire. Switch must be mounted indoors**


Design Features

- Turn the connected device On/Off manually or via Z-Wave hub or controller
- Remotely monitor with any mobile device*
- Works with Google and Alexa (requires compatible hub*)
- May be used in single pole installation or with up to four iDevices® model IDEVZ03DW Add-on switches in 3, 4, 5 or 6-way wiring configurations
- Works with all LED, CFL, halogen and incandescent bulbs
- Blue LED indicates switch location in a dark room (with 4 adjustable settings)
- Can be included in multiple Groups and Scenes
- Utilizes the Z-Wave Firmware Update Meta Data command class for standardized firmware updates Over the Air
- Supports Advanced Configuration; LED status, Alternate exclusion
- Screw Terminal installation; requires wiring connections for Line (Hot), Load, Neutral, and Ground. Traveler wire required for multi pole installation
- Uses a standard decora wall plate (wall plate not included)
- Interchangeable Paddle switch: White & light almond paddle included in package
- LED status can be inverted manually changed to invert, always OFF and always ON
- Inline traveler circuit protection
- Z-Wave Plus Certified

Z-Wave Plus with S2 Security and SmartStart Features

- Improved battery life and up to 50 percent greater wireless range
- QR codes with unique, industry-standard secure key exchange to add a layer of 128-bit encryption
- Effortless device pairing to Z-Wave S2 and SmartStart certified gateways
- Backward compatible with all generations of Z-Wave devices
- 250% faster processor
- 400% more memory
- 50% more energy efficient
- Supports wireless upgrades to future-proof your home

White/light almond paddles included



* Requires Z-Wave hub or controller, functions may vary depending on brand.

IDEVZ01DW PRODUCT SPECIFICATIONS

Device Configuration

Adding your device to a Z-Wave network


Once the hub is ready to add your smart dimmer, press and release the top or bottom button on the smart dimmer to add it in the network.

To remove and reset the device

Once the controller is ready to remove your device, press and release the top button on the smart dimmer to remove it from the network.

S2 + SmartStart install

The controller's app will indicate if it has discovered the device. If prompted by the controller to enter the S2 security code, refer to the QR code/security number on the side of the box, or the QR code label on the product. Enter the 5-digit code.



To return to factory defaults

Quickly press the ON button 3 times, then press the OFF button 3 times. The LED will flash ON/OFF 5 times when completed successfully.

Certifications & Compliances



Compliances, specifications and availability are subject to change without notice.

DISTRIBUTED BY
WIRING DEVICES-KELLEMS
HUBBELL INCORPORATED
(DELAWARE)
SHELTON, CT 06484

©Hubbell | IDEVZ01DW | 2021 v1.1

Related Products - iDevices® Z-Wave Products



IDEVZ05DW
In-Wall
Smart Dimmer



IDEVZ03DW
Add-On
Switch



IDEVZ08W
Smart Tamper
Resistant
Receptacle