


Locking Devices



20 Amp Non-NEMA Locking Devices

20A 125/250V, 250V AC and 3ØY 120/208V AC Locking Devices,
Grounding and Non-Grounding Inches (mm)

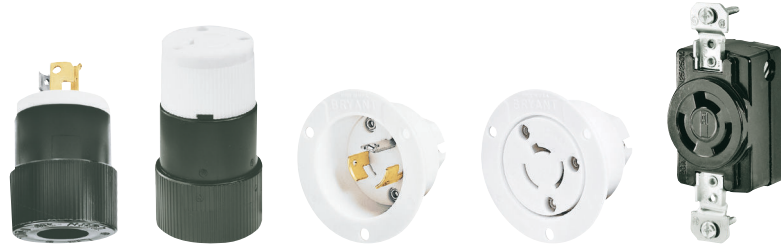

Rating	Poles/ Wires	Cord Diameter	Description	Nylon Construction		Flanged Devices Equipment Base with Binding Screw Terminals		Single Receptacle Back and Side Wired
				Plug	Connector	Male White Nylon	Female White Nylon	
20A 125/250V AC, Non-Grounding 	3-Pole 3-Wire	.375"-1.000" (9.5-25.4)	Black/White All Black	9965 9965NB	7314 7314NB	7327 —	7328 —	— 7310
			Sentinel Yellow	9965NSY	7314NSY	—	—	—
20A 250V AC, Grounding 	2-Pole 3-Wire		All Black	—	—	—	—	7310G*
20A 3ØY 120/208V, Non-Grounding 	4-Pole 4-Wire	.625"-1.150" (15.9-29.2)	Black/White	9967	7414	7408MB	7409ER	7410 7417**
			Sentinel Yellow	9967NSY	7414NSY	—	—	—
20A 250V AC, Grounding 	3-Pole 4-Wire		All Black	—	—	—	—	7410G*
20A 3ØY 120/208V AC, Grounding 	4-Pole 5-Wire	.625"-1.150" (15.9-29.2)	Black/White	3521	3523	—	—	—

Note: Rating Change: All devices listed on this page are intended for replacement use only in existing installations. We recommend that they not be used in new installations. Both standard and suffix "G" devices were formerly dual rated 20 Amp 250V AC or DC, 10 Amp 600V AC. Suffix "G" devices are intended for equipment grounding applications and formerly complied with UL Standards. However, due to revisions of these Standards, suffix "G" devices are no longer UL Listed and the rating of non-grounding devices has been changed to 20 Amp 125/250V. For new installations, refer to the NEMA configuration chart on H-2 for the products suited for your particular current and voltage requirements. **CAUTION:** To Avoid Electric Shock-Review premises carefully and do not use if slot or blade configuration (design) is already in a circuit having a rating differing from the rating of this device.

See page H-20 for weather protective boots for 20 amp nylon locking plugs.
*Not UL Listed. For Replacement use only.
**Catalog number 7410 on 4 in. (101.6) round metal box cover. Not CSA Certified.

Product Dimensions Inches (mm)

Plug		Single Receptacle	Flanged Devices		
A	B				
2.60" (66.0)	1.80" (45.7)	3.28" (83.3)	3.06" (77.7)		
1.80" (45.7)	2.11" (53.6)	2.38" (60.5)	120		
2.11" (53.6)		1.56" (39.6)	2.68" (68.1)		
		1.71" (43.4)	2.27" (57.7)		
		2.50" (63.5)	2.23" (56.6)		
		1.14" (29.0)	(3) 0.19" (4.8)		

Connector		Single Receptacle	Flanged Devices		
A	B				
3.73" (94.7)	1.80" (45.7)	3.28" (83.3)	3.06" (77.7)		
1.80" (45.7)	2.11" (53.6)	2.38" (60.5)	120		
2.11" (53.6)		1.56" (39.6)	2.68" (68.1)		
		1.71" (43.4)	2.27" (57.7)		
		2.50" (63.5)	2.23" (56.6)		
		1.14" (29.0)	(3) 0.19" (4.8)		