


Locking Devices

15 Amp Locking Receptacles



15A 125V, 250V and 277V Locking Devices, 2-Pole 3-Wire Grounding Inches (mm)

TECH-SPEC®

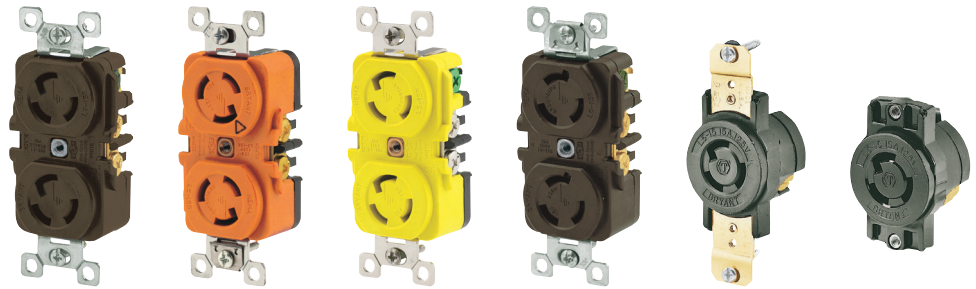

Rating	Description	Back and Side Wired				
		Duplex Receptacle	Single Receptacle			
		Reinforced Thermoplastic Polyester (RTP)	Nylon	Panel Mount Mounting Hole Center		Mounted on a 4" (101.6) Round Cover
Plug	Connector			1.94" (49.3)	1.75" (44.5)	
NEMA L5-15, 15A 125V	Black	—	4710	4712BRY	4713BRY	4711BRY
	Brown	4700DR	—	—	—	—
	Ivory	4700DRI	—	—	—	—
	Isolated Ground	4700DRIG	4710IG	—	—	—
	Corrosion-Resistant	4700DRCR	4710CR	—	—	—
	Yellow	—	—	—	—	—
NEMA L6-15, 15A 250V	Black	—	70615FR	7061594	7061575	—
	Brown	70615DR	—	—	—	—
	Isolated Ground	70615DRIG	70615IG	—	—	—
	Orange	—	—	—	—	—
NEMA L7-15, 15A 277V AC	Black	—	4760	—	—	4761
	Brown	4750DR	—	—	—	—

Note: See Section D for more information on isolated ground devices and Section J for more information on corrosion-resistant devices.

Receptacle Accessories



Single Receptacle Wallplate		Duplex Receptacle Wallplate		Weatherproof Covers		
Stainless Steel	Thermoplastic	Stainless Steel	Thermoplastic	Zinc Die Cast	Zinc Die Cast	Thermoplastic
SS7	P7BK	SS8	P8BK	RW51550	RW51470	RW57300

Note: See Section Q for additional information on wallplates and weatherproof covers.

Product Dimensions Inches (mm)

Receptacle		Dimensions					
Duplex	Single	A	B	C	D	E	F
A	3.28" (83.3)	3.28" (83.3)	2.74" (69.6)	1.70" (43.2)	1.17" (29.7)	0.93" (23.6)	—
B	2.38" (60.5)	2.38" (60.5)	1.74" (44.1)	1.38" (35.1)	1.41" (35.8)	1.37" (34.8)	—
C	1.70" (43.2)	1.38" (35.1)	1.70" (43.2)	1.38" (35.1)	1.41" (35.8)	1.37" (34.8)	—
D	1.17" (29.7)	1.41" (35.8)	1.17" (29.7)	1.38" (35.1)	1.41" (35.8)	1.37" (34.8)	—
E	0.93" (23.6)	1.37" (34.8)	0.93" (23.6)	1.38" (35.1)	1.41" (35.8)	1.37" (34.8)	—
F	—	1.01" (25.7)	—	1.38" (35.1)	1.41" (35.8)	1.37" (34.8)	0.33" (8.4)

