



**NEW
PRODUCT**

Microprocessor Based Soft Start/Stop Solid State Reduced Voltage

‘PILOT’ SERIES MPT700

MPT700 Soft Start Fire Pump Controllers utilize a solid state motor controller. The motor voltage is raised to an adjustable initial torque value. The motor voltage is gradually increased during the acceleration ramp time, max. of 10 seconds per NFPA 20. After a minimum run time and all starting causes have returned to normal, the controller will initiate a ramp down process by smoothly decelerating the motor at an adjustable rate to a stop. This smooth acceleration/deceleration of the motor reduces surges and water hammer in the sprinkler system. In-rush current can be adjusted as low as 25%.

Only the highest quality components, UL Listed or Recognized, are used throughout to assure the best possible reliability. The cabinet is fabricated of heavy 12 gauge reinforced steel, with Type 3R supplied as standard and rated 60°C. All field wiring and service connections may be made from the front, allowing the controller to be mounted flush against a wall.

Metron fire pump controllers conform to the latest requirements of the NFPA 20, UL 218 and FM 1321/1323, and bear the labels of Underwriters Laboratories and Factory Mutual.

Controllers are completely wired, assembled, and tested at the factory before shipment and ready for immediate installation.




**PATENTED
TECHNOLOGY**




Metron Fire Pump Controls and Accessories

Touch Screen Features

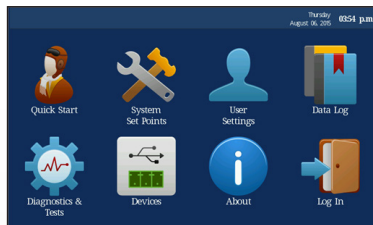

- » Large 7" color LCD touch screen
- » Simultaneous display on Home screen for 3 phase amperage/voltage, system pressure, start pressure, stop pressure, system status, alarm status, date and time.
- » On-screen Icons for Pilot/Quick Start, System Set Points, User Settings, Data Log, Diagnostics, and others for ease of installation and data log/event history retrieval.
- » Let Metron's "Pilot" feature guide you through the controllers startup settings. The "Pilot" feature guides the user automatically step-by-step through the settings required at start up. Searching through multiple menus to locate settings is eliminated. "Pilot" appears on the touch screen on initial power up, or by pressing the "Pilot" Icon.
- » View data log/event history in Calendar screen to easily find a specific event by touching the day on the calendar month

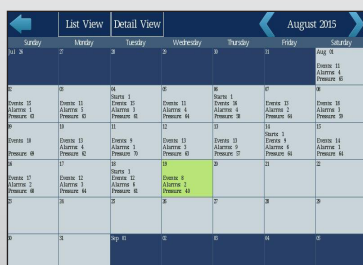

Standard Features

- » The Microprocessor based logic with real time/date clock capable of running 7+ years without AC power. Includes low battery indicator.
- » The on-board data log memory can store up to 18 months of event history (approx. 112,000 events), and over 10 years of event history with a 2G USB Flash Drive. Data/Event log can store over 10+ years of time and date stamped events. Real time clock is accurate to plus/minus 2 minutes per year over the full temperature range. The event history can be viewed by scrolling on the display or by saving it to a USB flash drive. The event history is recorded as a .CSV file and can be easily opened as an Excel file.
- » Multi level password protection
- » 60°C rated with Type 3R enclosure as standard
- » For added safety a through door USB port is provided to access data logs/event history without opening the controller door.
- » Internal controller temperature monitored and data logged as standard
- » Status LED's on PB board inputs/outputs provide visual indication of on/off status
- » Pressure transducer fault LED
- » System Self Test on power up
- » Serial communication to PC boards reduces number of wire for improved reliability.
- » Single logic control for operation of both the fire pump controller and transfer witch.
- » Monitoring of the PC board inputs/outputs through the touch screen
- » Phase rotation selectable through "Pilot feature" or Congif Icon
- » Foreign language selectable
- » Modbus communication Protocol via RS485 port
- » Controllers are suitable for use as Service entrance equipment
- » 600 PSI rating provided as standard. Utilizes a manifold block for the pressure transducer and drain solenoid valve that eliminates the need for copper plumbing with Teflon tape, significantly reducing the possibility of water leaks.





Auxiliary Programs

The controller includes as standard six (6) discrete auxiliary inputs and six (6) outputs. These auxiliary I/O are in addition to those required by NFPA 20 UL and FM.

All auxiliary I/O can be field programmed on the touch screen. Expandable 12 channel I/O board for additional alarms, expandable to 168 I/O. All 48 aux programs can have a custom message.

Events and Alarms

Each record tracks:

- Date and time
- Pressure
- Voltage and current
- Login state
- Pressure
- Internal temperature
- State of every alarm
- The I/O state of all PCB's (excluding any add-on boards)
- Active start conditions
- The state of all aux programs (48 aux programs available)
- Power available

Event Messages

- EVENT MESSAGES
- REMOTE TEST START
- MANUAL TEST START
- AUTO TEST START
- MODBUS TEST START
- REMOTE START
- MODBUS START
- HIGH ZONE CALL TO START
- DELUGE START
- PRESSURE TRANSDUCER FAILURE START
- SUPERVISORY POWER FAILURE START
- LOW PRESSURE START
- LOCAL START
- PUMP RUNNING
- CRR ENERGIZED/DE-ENERGIZED
- CSR ENERGIZED/DE-ENERGIZED
- LOAD SHED
- SOFT START ON
- MANUAL STOP
- AUTO STOP
- ACCELERATION TIMER ON
- REMOTE LOCKOUT
- REMOTE LOCKOUT CLEARED
- DUMP VALVE OPENED
- DUMP VALVE CLOSED
- DUMP VALVE INSUFFICIENT DISCHARGE
- SYSTEM REBOOT

Alarm Messages

Each alarm occurred or cleared

- PHASE FAILURE
- PHASE REVERSAL
- PHASE OVER/UNDER VOLTAGE
- PHASE OVER/UNDER FREQUENCY
- PRESSURE TRANSDUCER FAULT
- LOW/HIGH PRESSURE
- FAIL TO START
- FAIL TO STOP
- LOCKED ROTOR
- MOTOR OVERLOAD
- LOW SUCTION
- LOW ZONE FAIL TO START
- LOW ZONE QUIT
- SUPERVISORY POWER FAILURE
- LOSS OF POWER

Model Number Designation

Example: MPT700-75-480-H

MPT700 -- Model Type

- **xXX** -- Horsepower Rating

- **XXX** -- Voltage Rating

- **X** -- Option Designation(s)*

Ratings

VOLTS	HP -- RMS SYMMETRICAL
200-208	15-150 -- 100kA
220-240	15-200 -- 100kA
380-415	15-300 -- 100kA
460-480	15-400 -- 100kA
200-208	200-250 -- 50kA
220-240	250-300 -- 50kA
380-415	350-350 -- 50kA
460-480	500-600 -- 50kA
550-600	15-400 -- 22kA

*Options are listed on next page.



Metron Fire Pump Controls and Accessories

Options

Option H: Space Heater

If the ambient atmosphere is especially damp, a space heater rated at 100 watts may be supplied to reduce moisture in the cabinet. A thermostat is supplied as standard with this option. A humidistat may be substituted if specified.

Enclosure Options

Type 3R is standard. The following UL Type enclosures are available:

- Type 4
- Type 4X (painted cold roll steel)
- Type 4X (304 or 316 Stainless Steel)
- Type 12

Consult factory for additional options.

US PATENTS

*US 8,482,307 B2 Method For Prevention
of Untested PC Boards from Being Used
In A Fire Pump Control System.*

Contact Us

NORTH & SOUTH AMERICA

Hubbell Industrial Controls, Inc.
Metron Fire Pump Control Division
4301 Cheyenne Dr., Archdale, NC 27263
Phone: 336-434-2800, Fax: 336-434-2801
salesmail@metroninc.com
www.hubbell-icd.com

EUROPE

Metron Eledyne
18 Autumn Park, Dysart Road
Grantham, Lincolnshire, NG31 7DD, United Kingdom
Tel: +44 (0) 1476 516120, Fax: +44 (0) 1476 516121
info@metroneledyne.co.uk

TAIWAN

Hubbell-Taian Co. Ltd.
Contact Person: Jimmy Wu
Tel: (02)2522 1862 ext.10, Fax: (02)2522 1872
6th Floor, 156-1, Sung Chiang Road, Taipei, Taiwan
jwu@hubbell-taian.com.tw

CHINA

Hubbell-Anmex (Shanghai) Trading Co., Ltd
Contact Person: Derek Chen
6H, Zhao-Feng Universe Building, No. 1800, West
Zhongshan Rd., Shanghai 200235, China
Tel: 86-21-64400151, 64400156, Fax: 86-21-64400152
Mp: 86-13391373007
dchen@hubbell-anmex.com.cn

PHILIPPINES

Hubbell-Taian Co. Ltd.
Philippine Representative Office
Contact Person: Wency Villas-Besa
Unit 23 Parc House Bldg, #227 EDSA, Greenhills,
Mandaluyong City 1556, Philippines
Tel: 632-6556460, Fax: 632-6556421
DL WL: 632-8717389
wency@hubbelltaian.com.ph

www.metroninc.com



Hubbell Industrial Controls, Inc. • 4301 Cheyenne Dr., Archdale, NC 27263
PH: 336-434-2800 • FAX: 336-434-2809 • Email: salesmail@metroninc.com

