


# Wire Management Products

## Strain Relief Grips Quick Reference Selection Guide



### Deluxe Cord

Indoor or outdoor use where subject to moisture, splash, or washdown. Examples are crane hoist and pendant drop stations, hand tools, pumps, and processing equipment. See pages N-23 and N-24.



### Wide Range Strain Relief

Indoor use only for wiring of electrical enclosures, machine tools, portable power tools, and bus drop cable systems. See page N-25.



### Liquidtight, Flexible Metal Conduit

Wiring of machine tools, electrical enclosures, motors, and systems subjected to vibration, flexure, motion, or strain. Also available in straight, 90° or 45° configurations. See page N-25.


## Deluxe Cord Strain Relief Grips

### Application:

Indoor and outdoor environments where cable or arc-of-bend control, cord is exposed to moisture, splash or washdown, provides pullout from tension, vibration, motion and strain

### Ideal For Use In:

- Industrial applications
- Chemical machinery
- Control cabinets
- Pumps and compressors
- Machine tool shops
- Motor connections

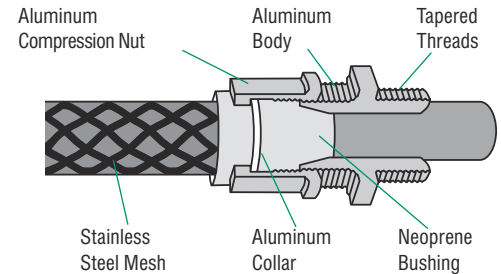

### Deluxe Cord Grips Inches (cm)



NPT Hub Size Inches	Grip Dia. Range Inches (cm)	Straight Male Thread	NPT Hub Size Inches	Grip Dia. Range Inches (cm)	Straight Male Thread
3/8"	.250"- .312" (.63-.79)	<b>DC2538</b>	2"	1.312"-1.437" (3.33-3.65)	<b>DC1312</b>
	.312"- .375" (.79-.95)	<b>DC3138</b>		1.437"-1.562" (3.65-3.97)	<b>DC1432</b>
	.375"- .437" (.95-1.11)	<b>DC3738</b>		1.562"-1.687" (3.97-4.28)	<b>DC1562</b>
1/2"	.187"- .250" (.47-.63)	<b>DC1812</b>		1.687"-1.812" (4.28-4.60)	<b>DC1682</b>
	.250"- .375" (.63-.95)	<b>DC2512</b>		1.750"-1.875" (4.44-4.76)	<b>DC1752</b>
	.375"- .500" (.95-1.27)	<b>DC3712</b>		1.812"-1.937" (4.60-4.92)	<b>DC1812</b>
	.500"- .625" (1.27-1.59)	<b>DC5012</b>		1.937"-2.062" (4.92-5.24)	<b>DC1932</b>
3/4"	.625"- .750" (1.59-1.90)	<b>DC6212</b>		2.062"-2.187" (5.24-5.55)	<b>DC2062</b>
	.187"- .250" (.47-.63)	<b>DC1834</b>		2 1/2"	1.687"-1.812" (4.28-4.60)
	.250"- .375" (.63-.95)	<b>DC2534</b>	1.812"-1.937" (4.60-4.92)		<b>DC181212</b>
	.375"- .500" (.95-1.27)	<b>DC3734</b>	1.937"-2.062" (4.92-5.24)		<b>DC193212</b>
.500"- .625" (1.27-1.59)	<b>DC5034</b>	2.062"-2.187" (5.24-5.55)	<b>DC206212</b>		
.625"- .750" (1.59-1.90)	<b>DC6234</b>	2.187"-2.312" (5.55-5.87)	<b>DC218212</b>		
.750"- .875" (1.90-2.22)	<b>DC7534</b>	2.312"-2.437" (5.87-6.19)	<b>DC231212</b>		
1"	.500"- .625" (1.27-1.59)	<b>DC501</b>	3"	1.937"-2.062" (4.92-5.24)	<b>DC1933</b>
	.625"- .750" (1.59-1.90)	<b>DC621</b>		2.063"-2.187" (5.24-5.55)	<b>DC2063</b>
	.750"- .875" (1.90-2.22)	<b>DC751</b>		2.187"-2.312" (5.55-5.87)	<b>DC2183</b>
	.875"-1.000" (2.22-2.54)	<b>DC871</b>		2.312"-2.437" (5.87-6.19)	<b>DC2313</b>
1 1/4"	.875"-1.000" (2.22-2.54)	<b>DC87114</b>		2.437"-2.625" (6.19-6.67)	<b>DC2433</b>
	1.000"-1.125" (2.54-2.86)	<b>DC100114</b>		2.625"-2.812" (6.67-7.14)	<b>DC2623</b>
	1.125"-1.250" (2.86-3.17)	<b>DC112114</b>		2.812"-3.000" (7.14-7.62)	<b>DC2813</b>
	1.250"-1.375" (3.17-3.49)	<b>DC125114</b>			
1 1/2"	.875"-1.000" (2.22-2.54)	<b>DC87112</b>			
	1.000"-1.125" (2.54-2.86)	<b>DC100112</b>			
	1.125"-1.250" (2.86-3.17)	<b>DC112112</b>			
	1.250"-1.375" (3.17-3.49)	<b>DC125112</b>			
	1.312"-1.437" (3.33-3.65)	<b>DC131112</b>			
	1.437"-1.562" (3.65-3.97)	<b>DC143112</b>			
	1.562"-1.687" (3.97-4.28)	<b>DC156112</b>			
1.687"-1.812" (4.28-4.60)	<b>DC168112</b>				

NEC® is a registered trademark of the National Fire Protection Association (NFPA).