

IMPORTANT SAFETY INFORMATION. READ AND FOLLOW ALL SAFETY INSTRUCTIONS. Follow label information and instructions concerning Wet or Damp Locations, installation near combustible materials, insulation, building materials, and proper lamping. Do not install in areas subject to combustible vapors or gases. Before wiring to power supply and during servicing or relamping, turn off power at fuse or circuit breaker. **All servicing or relamping must be performed by qualified service personnel. Product must be grounded to avoid potential electric shock or other potential hazard. Product must be mounted in locations and at heights and in a manner consistent with its intended use, and in compliance with the National Electrical Code and local codes.** The use of accessory equipment not recommended by the manufacturer or installed contrary to instructions may cause an unsafe condition. Do not block light emanating from product in whole or part, as this may cause an unsafe condition. Do not allow items such as drapes, curtains, screens or the like to come into contact with the product or to block light from the product, as this may cause an unsafe condition.

## INSTALLATION INSTRUCTIONS

### ARCHITRAK® SYSTEM

#### INSTALLATION INSTRUCTIONS

FOR AKTCC LIVE END CONNECTOR WITH CORD


FOR USE WITH PRESCOLITE AKT ONE/TWO CIRCUIT TRACK SYSTEM ONLY

READ INSTALLATION INSTRUCTIONS BEFORE INSTALLING THE TRACK SYSTEM

SAVE INSTRUCTIONS FOR REFERENCE WHEN MAKING ADDITIONS TO OR CHANGES IN THE TRACK SYSTEM.

#### INSTALLATION

1. Refer to PRESCOLITE AKT series track for track installation instructions
2. Live end feed is prewired with a 16 GA. 3 wire grounded cordset rated at 10 amps. Maximum load for this cordset is 80% of rated capacity or 8 amps. Multiplying maximum amperage by voltage yields the maximum wattage available. For this cordset, 960 watts is maximum.  
 EXAMPLE: 1 - 300 WATT BULB = 300W  
 4 - 150 WATT BULBS = 600W  
 900W watts total on circuit is safe because it does not exceed 960 watts
3. Align live end feed with pre-mounted track rail, insert and press together, tighten retaining screw.
4. Plug into ground outlet.
5. **NOTE:** This connector will energize both track circuits, use with a maximum of 8 feet of track rail.

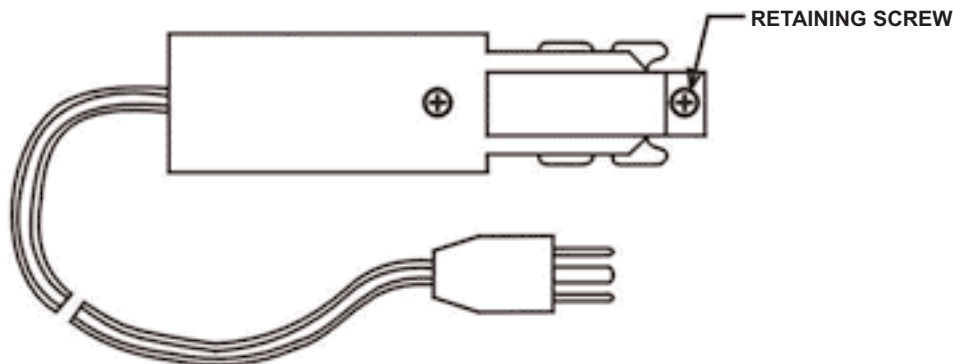

**SAVE THESE INSTRUCTIONS**