

**IMPORTANT SAFETY INFORMATION. READ AND FOLLOW ALL SAFETY INSTRUCTIONS.** Follow label information and instructions concerning Wet or Damp Locations, installation near combustible materials, insulation, building materials, and proper lamping. Do not install in areas subject to combustible vapors or gases. Before wiring to power supply and during servicing or relamping, turn off power at fuse or circuit breaker. **All servicing or relamping must be performed by qualified service personnel. Product must be grounded to avoid potential electric shock or other potential hazard. Product must be mounted in locations and at heights and in a manner consistent with its intended use, and in compliance with the National Electrical Code and local codes.** The use of accessory equipment not recommended by the manufacturer or installed contrary to instructions may cause an unsafe condition. Do not block light emanating from product in whole or part, as this may cause an unsafe condition. Do not allow items such as drapes, curtains, screens or the like to come into contact with the product or to block light from the product, as this may cause an unsafe condition.

## INSTALLATION INSTRUCTIONS ARCHITRAK® SYSTEM

### INSTALLATION INSTRUCTIONS

FOR AKTEF LIVE END FEED.

FOR USE WITH PRESCOLITE AKT ONE/TWO CIRCUIT TRACK SYSTEM ONLY.


READ INSTALLATION INSTRUCTIONS BEFORE INSTALLING THE TRACK SYSTEM  
SAVE INSTRUCTIONS FOR REFERENCE WHEN MAKING ADDITIONS TO OR CHANGES  
IN THE TRACK SYSTEM CONFIGURATION.

### INSTALLATION

1. Refer to PRESCOLITE AKT series track for track installation instructions
2. Loosen retaining screw at ends of connector.
3. Remove plastic cover from feed connector. Remove 7/8 Dia. Ko.
4. Align live end feed with pre-mounted track rail. Insert and press together.
5. For supply wire connection use approved 1/2" conduit connector.
6. For single circuit operation connect black wire (HOT) to brass terminal L-1. Connect white wire (NEUTRAL) to nickel terminal N-1. Connect ground wire to green ground screw. For two wire circuits see wiring diagrams below.
7. Replace plastic cover.


NOTE: L-1, L-2 BRASS COLORED TERMINAL  
N-1, N-2 NICKEL COLORED TERMINAL  
JUMPER WIRES USE 12 GA.  
STRANGED, UL/CSA LISTED  
90 DEGREE WIRE.

WIRE DIAGRAM 1-CIRCUIT  
WIRE HOT WIRE TO L-1  
NEUTRAL TO N-1, CONNECT  
GROUND WIRE TO GROUND  
SCREW..

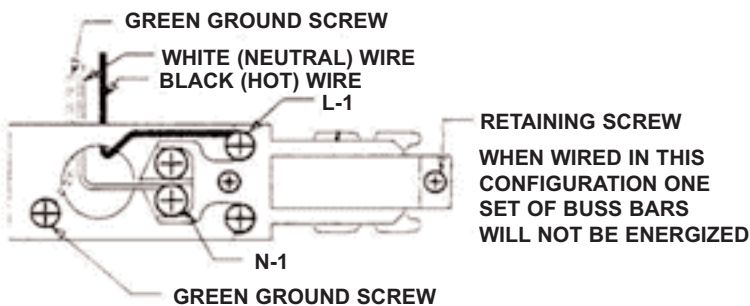


WIRE DIAGRAM 1-CIRCUIT  
WIRED FOR 2-CIRCUITS.

WIRE HOT WIRE TO L-1,  
NEUTRAL TO N-1. BLACK  
JUMPER WIRE TO L-1 AND  
L-2, WHITE JUMPER WIRE  
TO N-1 AND N-2. CONNECT  
GROUND WIRE TO GROUND  
SCREW.

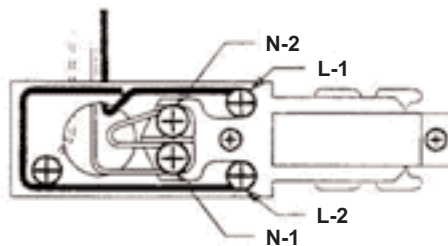

WIRE DIAGRAM 2-CIRCUITS  
CIRCUIT 1 WIRE HOT WIRE  
TO L-1 NEUTRAL WIRE TO N-1  
GROUND WIRE TO GROUND  
TERMINAL.

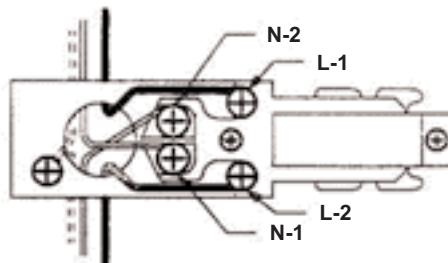

CIRCUIT 2 WIRE HOT WIRE  
TO L-2 NEUTRAL WIRE TO N-2  
GROUND WIRE TO GROUND  
TERMINAL.



101 Corporate Drive • Spartanburg, SC 29303

With representatives offices in principal cities throughout North America.  
Copyright 2005, 08/05 revision, All Rights Reserved - Printed in U.S.A.