



AR-LED-KIT
SAR-LED-KIT



ET-LED-KIT
SET-LED-KIT



STL-LED-KIT
STS-LED-KIT

HID to PicoPrism™ Upgrade Kit Installation AR/SAR, ET/SET, STL/STS



WARNING: Fixtures must be grounded in accordance with local codes or the National Electrical Code. Failure to do so may result in serious personal injury.



WARNING: RISK OF FIRE OR ELECTRICAL SHOCK. Install this kit only in the luminaires that have the construction features and dimensions shown in the photographs and/or drawings. luminaires wiring, power supply, or other electrical parts may be damaged when drilling for installation of retrofit assembly hardware. inspect all wiring and components for damage.



WARNING: To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.



CAUTION: Installation of this retrofit assembly requires a person familiar with the construction and operation of LED luminaire electrical systems and the hazards involved./Confier l'installation de ce nécessaire de modernisation a une personne connaissant la construction et le fonctionemnet des installations d'eclairage fluorescent et consciente des risques qu'elles comportent.



CAUTION: Do not alter, relocate, or remove wiring, lampholders, ballasts, or any other electrical components./Ne pas modifier, deplacer ni enlever de cable, de douille de lampe, de ballast ou autre composant electrique.



CAUTION: Unless otherwise specified, do not make or alter any openings in the compartment of wiring or electrical components during installation of this retrofit assembly. plug all unused openings in the compartment of wiring or electrical components.



CAUTION: Only the holes indicated in the photographs and/or drawings may be made or altered as a result of kit installation. Do not leave any other open holes in an enclosure of wiring or electrical components.

MAINTENANCE: A regularly scheduled maintenance program should be established to retain optimum light output and reduce heat retention. Dusting with a soft, clean, dry cloth is normally sufficient for the reflector. Do Not use alkaline or acid cleaners on reflector surfaces.

NOTE: All wiring must be done by a qualified electrician. KEEP THIS SHEET FOR FUTURE REFERENCE.

CAUTION: Due to the increased current of the Picoprism assemblies, the glass lens must be removed.

Contents of Kit: (1) LED with PicoPrism assembly
(1) Driver Assembly

Tools Required: Screwdriver with Phillips bit
Large flat blade screwdriver

The Archetype® HID to PicoPrism Upgrade Kit installation is shown but the same steps follow for The Entablature® and Structural.


HID to PicoPrism™ Upgrade Kit Installation AR/SAR, ET/SET, STL/STS

 Make certain electrical supply is **OFF** before starting fixture.


IMPORTANT: In upgrading HID to PicoPrism, always remove glass lens from the door frame to allow more lumen output and prevent heat build-up. See step 3. **CAUTION:** always hold door frame. Damage may occur if door frame is allowed to swing freely.



1. Open latch and push up on door frame and hold. Pull latch lever up and out of keeper.

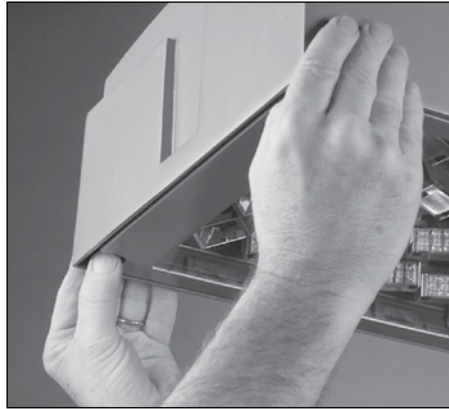


- 1a. On The Entablature and Structural, push up on door frame and push both spring tabs simultaneously outward using thumbs.

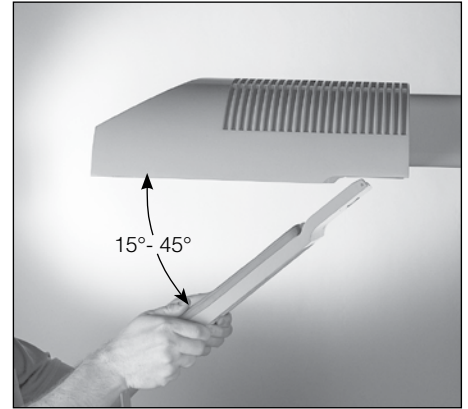


2. Remove door frame. Door frame can only be removed or attached when located between 15° and 45° angle with fixture.



3.  Place door frame on padded surface to protect finish. Insert tip of large flat blade screwdriver under lens clip legs and twist to remove. **Carefully lift glass lens out of door frame and discard glass lens.**



4. Swing open ballast tray, unplug disconnect plugs and remove ballast assembly.

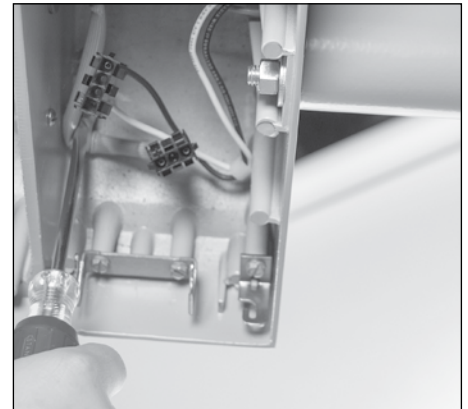

5. Unscrew bracket holding reflector wiring harness in place in ballast compartment.



6. With a Phillips screwdriver, loosen screws holding the reflector assembly in place. Lower reflector assembly.



7. Pull wires free from the ballast compartment to remove reflector assembly.



8. Thread EmitterDeck® wiring harness into Driver compartment.

HID to PicoPrism™ Upgrade Kit Installation AR/SAR, ET/SET, STL/STS



9. Raise EmitterDeck into place.



10. Attach EmitterDeck to housing with (4) Phillips screws that were on the original reflector assembly.



11. Re-hang door frame. **CAUTION:** Glass lens must be removed or overheating will occur.



12. Hang electronic driver tray.



13. Connect disconnect plugs from EmitterDeck to Driver tray. Connect disconnect plugs to power and driver.




14. Swing Driver tray into place and latch.



15. Push up on door frame and push latch lever up and inward. Swing latch down to secure the door frame.

HID to PicoPrism™ Upgrade Kit Installation AR/SAR, ET/SET, STL/STS

0-10V Dimming



Driver has a 0-10V dimming interface with a dimming range of 10-100%. Is compatible with most control systems including Hubbell Building Automation wiHUBB™. Approved dimmers include Lutron Diva AVTV, Lutron Nova NFTV and NTFTV. Note: Not compatible with current sourcing dimmers. Controls compatible via Gray and Purple dimming lead.

PICOPRISM LED LUMINAIRE WARRANTY

When properly installed and under normal conditions of use, Kim Lighting warrants PicoPrism™ luminaire products ("Product(s)") sold by Kim Lighting to be free from defects in material and workmanship for (i) a period of five (5) years for metal parts, (ii) a period of ten (10) years for exterior housing paint finish(s), and, (iii) a period of six (6) years for LED Light Engines () and, (iv) a period of five (5) years for LED power components (LED Driver, LifeShield Device,), from the date of sale of such goods to the buyer as specified in Kim Lighting shipment documents for each Product(s). Occupancy sensors, surge protectors, dimmers and relay wiring components are covered by the manufacturer's warranty. The buyer agrees to make all claims regarding defects or deficiencies in the Product(s) according to the terms of Kim Lighting's official warranty. Warranty claims must be made in writing according to Kim Lighting procedures existing at the time of the claim. Valid warranty claims must be made within the warranty period specified herein above, and submitted within thirty (30) days of discovery of the damage or defect. No FIELD labor, repair, DISMANTLE, or installation charges are included with this warranty. Kim Lighting may repair or replace any Product(s) covered by this warranty at its sole discretion and in accordance with its procedure. Any unauthorized return, repair, replacement or modification of the Product(s) shall avoid this warranty. This warranty applies only to the use of the Product(s) as intended by Kim Lighting and does not cover any misapplication or misuse of said Product(s), or installation in hazardous or corrosive environments. In no event shall Kim Lighting's total liability for any reason arising hereunder exceed the purchase price paid to Kim Lighting for the product purchased by the buyer hereunder. Contact Kim Lighting for complete warranty language, exceptions, and limitations.

HID-TO-LED UPGRADE KIT WARRANTY

When properly installed and under normal conditions of use, Kim Lighting warrants LED Upgrade Kit products ("Product(s)") sold by Kim Lighting to be free from defects for (i) a period of five (5) years for LED Light Engines (), (ii) a period of five (5) years for LED power components (LED Driver, LifeShield Device), and (iii) for a period of five (5) years for the re-used metal housing components of the existing luminaire from the date of sale of the LED Upgrade Kit to the buyer as specified in Kim Lighting shipment documents for each Product(s). Conditions and limitations of the re-used metal housing component warranty are as follows: 1) Existing luminaire must have been purchased within 15 years prior to the date of sale of the Upgrade Kit, 2) Poles, arms, accessories, and options are excluded, 3) Products installed in harsh or hazardous environments are excluded, 4) Warranty covers defects in material and workmanship in excess of the normal wear and tear to which the luminaire can normally be expected to experience at the judgment of Kim Lighting from the baseline condition of the luminaire at the time of installation and registration of the LED Upgrade Kit, 5) Owner must within 30 days of shipment of the LED Upgrade Kit by Kim Lighting register the project by emailing at least five (5) photo images of at least three (3) upgraded housings to upgrade@kimlighting.com referencing the project name and location, LED Upgrade Kit purchase order number, and approximate purchase date of the existing housing(s). Failure to provide complete registration information within the required 30 days will dissolve the five year housing warranty. 6) Kim Lighting reserves the right to deny the five year metal housing component warranty extension upon review of the submitted product images if the existing/original condition of the product indicates substantially excessive wear and tear beyond normal expectations given the product age. 7) Paint/finish of the fixture housing is excluded from this warranty for fixtures that have been installed for more than ten (10) years prior to the application of LED Upgrade Kit. Occupancy sensors, LED surge protectors, dimmers and relay wiring components are covered by the manufacturer's warranty and are not included as part of Kim Lighting warranty. The buyer agrees to make all claims regarding defects or deficiencies in the Product(s) according to the terms of Kim Lighting's official warranty. Warranty claims must be made in writing according to Kim Lighting procedures existing at the time of the claim. Valid warranty claims must be made within the warranty period specified herein above, and submitted within thirty (30) days of discovery of the damage or defect. No FIELD labor, repair, DISMANTLE, or installation charges are included with this warranty. Kim Lighting may repair or replace any Product(s) covered by this warranty at its sole discretion and in accordance with its procedure. Any unauthorized return, repair, replacement or modification of the Product(s) shall avoid this warranty. This warranty applies only to the use of the Product(s) as intended by Kim Lighting and does not cover any misapplication or misuse of said Product(s), or installation in hazardous or corrosive environments. In no event shall Kim Lighting's total liability for any reason arising hereunder exceed the purchase price paid to Kim Lighting for the product purchased by the buyer hereunder. Contact Kim Lighting for complete warranty language, exceptions, and limitations.