


IMPORTANT SAFETY INFORMATION. READ AND FOLLOW ALL SAFETY INSTRUCTIONS. Follow label information and instructions concerning Wet or Damp Locations, installation near combustible materials, insulation, building materials, and proper lamping. Do not install in areas subject to combustible vapors or gases. Before wiring to power supply and during servicing or relamping, turn off power at fuse or circuit breaker. **All servicing or relamping must be performed by qualified service personnel. Product must be grounded to avoid potential electric shock or other potential hazard. Product must be mounted in locations and at heights and in a manner consistent with its intended use, and in compliance with the National Electrical Code and local codes.** The use of accessory equipment not recommended by the manufacturer or installed contrary to instructions may cause an unsafe condition. Do not block light emanating from product in whole or part, as this may cause an unsafe condition. Do not allow items such as drapes, curtains, screens or the like to come into contact with the product or to block light from the product, as this may cause an unsafe condition.

INSTALLATION INSTRUCTIONS LITEISTRY™

LTR-3RA/4RA/6RA & LTR-3SQA/4SQA/6SQA

CAUTION: TO REDUCE THE RISK OF ELECTRICAL SHOCK, MAKE CERTAIN THAT THE POWER SUPPLY IS OFF BEFORE INSTALLING OR SERVICING THIS FIXTURE!

1. Install the fixture in the ceiling using the two hanger bars (1) (supplied), or mounting channel or bars (by others) placed in the adjustable mounting brackets (2). Mount the fixture in the ceiling so that the weight of the fixture is supported by the hanger bars, mounting channel, bar, and/or hanger wires secured to the building structure.
2. Adjust the fixture so the bottom of the plaster flange opening is flush with the finished ceiling line and in alignment with the adjacent fixtures. Secure the mounting brackets by tightening two wing nuts (3) on either side (inside the fixture).
3. Determine where the supply wiring conduit will enter the J-Box and attach it in conformance with the National Electric Code.
4. Remove the J-Box cover plate (4). Remove the appropriate knockout and assemble the appropriate connector for the supply wire used. Connect the ground wires to the green ground leads. Connect the white (common) to the white (leads). Connect the power supply (line) to the black lead(s). Reinstall the J-Box cover (4). **WARNING: DO NOT pinch wires between the J-Box cover plate and the J-Box. Consult a qualified electrician for all other options that require other wiring configurations.**

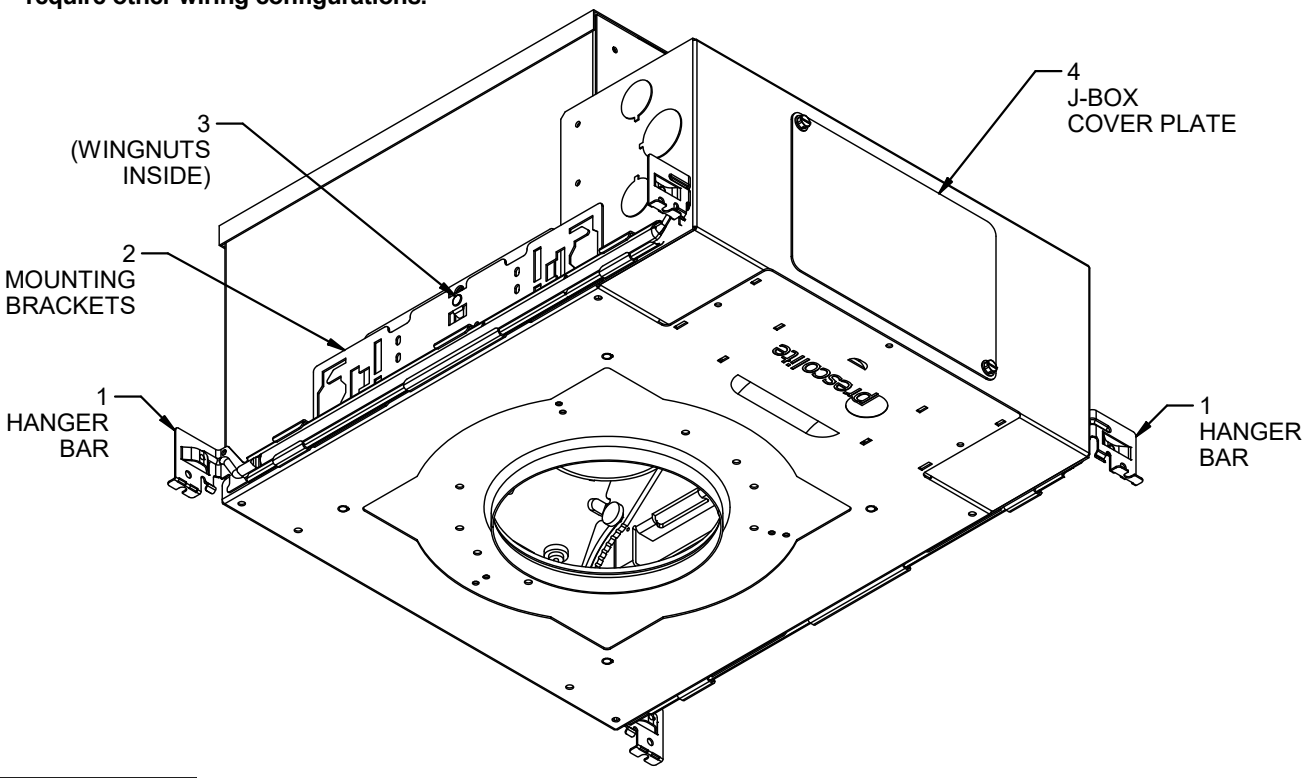


AIMING ADJUSTMENT: (This can be performed after installation with the power on.)

1. Loosen the horizontal rotation thumbscrew (1) and rotate the mechanism to the desired position. Lock the position by tightening the horizontal rotation thumbscrew. Loosen the vertical angle locking thumbscrew (2) and adjust the vertical angle to the desired position. There is a positioning assist handle (3) above the thumbscrew to aid in vertical positioning. Lock the position by tightening the vertical angle locking thumbscrew.

NOTE: The vertical angle increment indicators can be used to pre-adjust the vertical angle before installation, if desired.

VIEW OF ADJUSTMENT MECHANISM THROUGH THE APERTURE

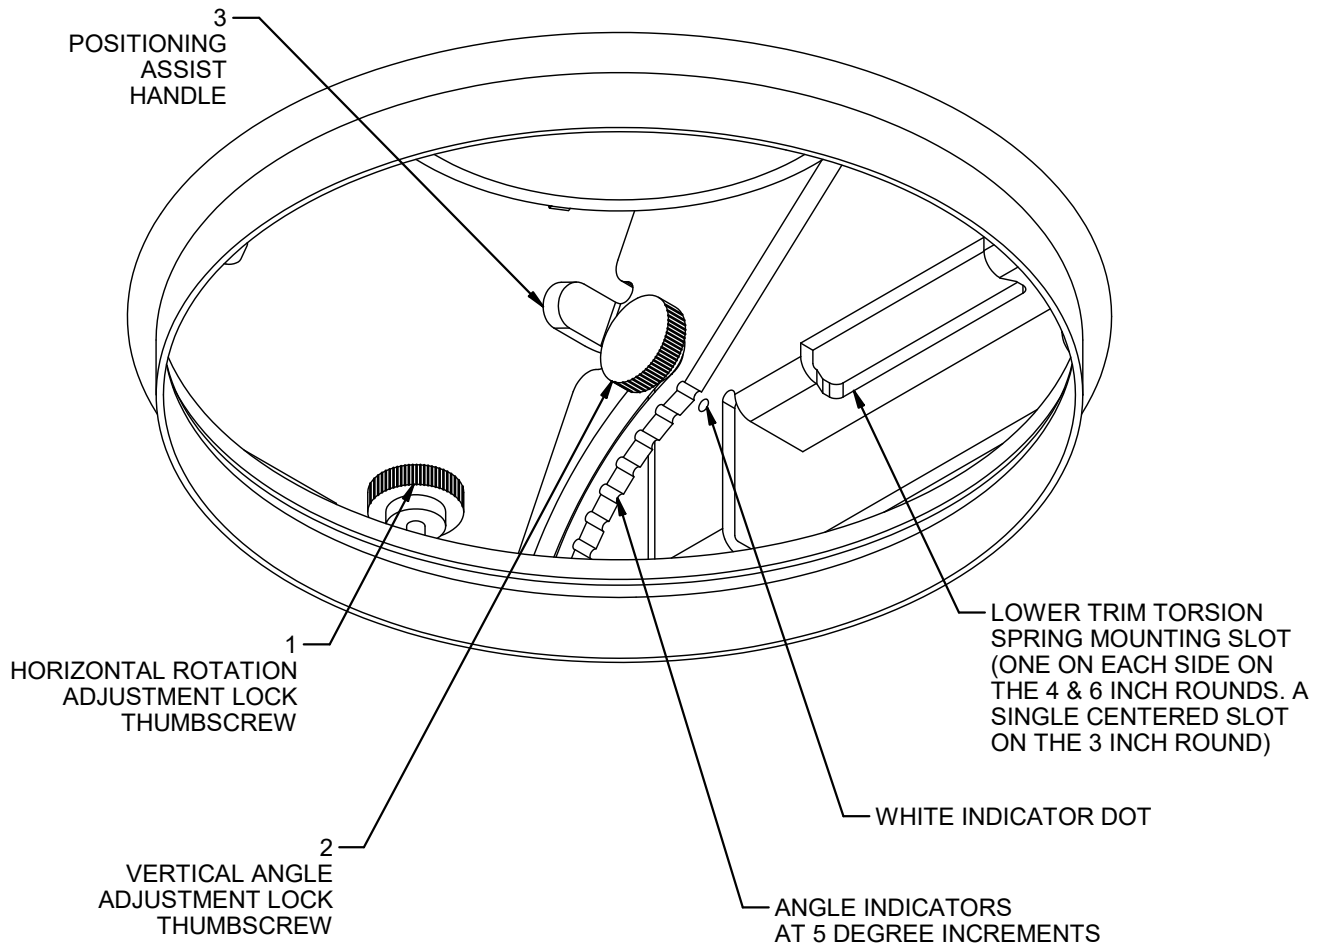

CAUTION: DO NOT ATTEMPT TO MODIFY OR REWIRE FACTORY-INSTALLED WIRING ON THE FIXTURE. SAFETY AND PROPER OPERATION OF THE FIXTURE DEPEND ON THE INTEGRITY OF THE WIRING.

KEEP THESE INSTALLATION INSTRUCTIONS



Hubbell Lighting, Inc.

701 Millennium Blvd • Greenville, SC 29607
With representatives offices in principal cities throughout North America.
Copyright 2018, 07/11/19 revision, All Rights Reserved - Printed in U.S.A.

