

## HA32 - Ribbon Arm Wall Mount with Bottom Scroll

### Installation Instructions

**⚠ WARNING:** Fixtures must be grounded in accordance with local codes or the National Electrical Code. Failure to do so may result in serious personal injury.

**MAINTENANCE:** A regularly scheduled maintenance program must be established to insure paint coating is intact, corrosion or structural damage has not occurred, and all mounting arms, rods, nuts and bolts are tight.

**CAUTION:** Structural integrity of mounting plate attachment to wall is by others.

**NOTE:** All electrical work must be done by a qualified electrician. **KEEP THIS SHEET FOR FUTURE REFERENCE.**


**Tools Required:**     Flat Head Screwdriver     Torque Wrench     3/16" Hex Wrench     Sealant

NS, SRS, RA17,                       9/16" 6- or 12- Point Deep (2" min.) Socket     12" (min.) Long Socket Extension


AE17, BE17, LE19

RA25, AE21, BE21, LE26:     3/4" 6- or 12- Point Deep (2" min.) Socket     20" (min.) Long Socket Extension


**⚠** Make certain electrical supply is **OFF** before starting installation.

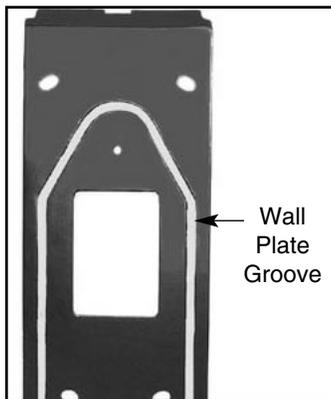


1. Remove wiring inspection cover from wall plate and wall mount cover. Adhere rope caulk in a continuous strip into the wall plate groove.

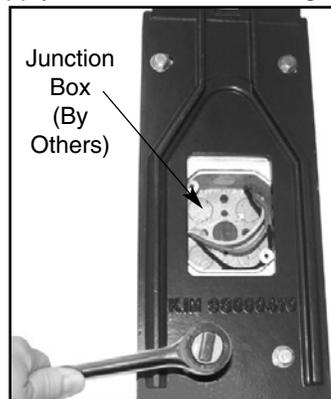

2. Securely mount wall plate over junction box (by others).

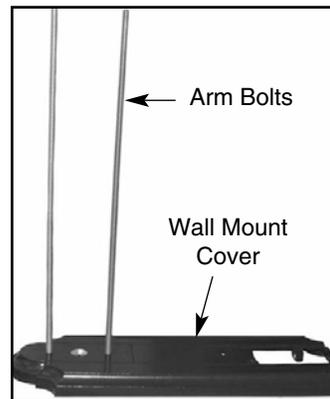


3. Insert arm bolts into wall mount cover.

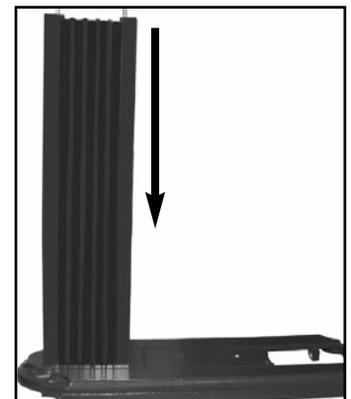

4. Install ribbon arm onto wall plate cover.

**CAUTION:** Structural integrity of mounting plate attachment to wall is by others.

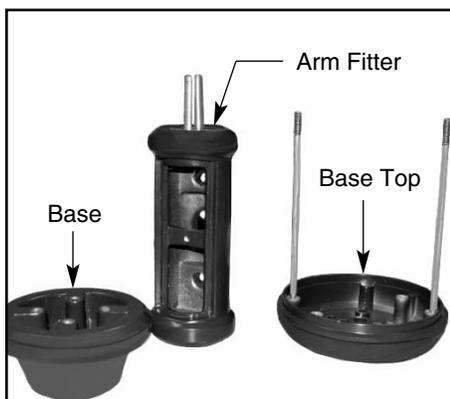


5. Attach base & base top to arm fitter using (4) socket head cap screws. Tighten securely. **IMPORTANT! Keep wires tight when attaching fixture to avoid pinching wires.**



# HA32S - Ribbon Arm Wall Mount with Bottom Scroll


## Installation Instructions

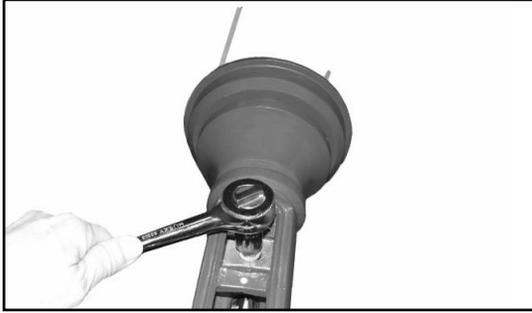

6. Feed fixture wires from arm fitter through ribbon arm. Install arm fitter assembly to ribbon arm using torque wrench. (See fixture installation instructions for fixture attachment.)



7. Attach bottom scroll to ribbon arm and wall plate cover.

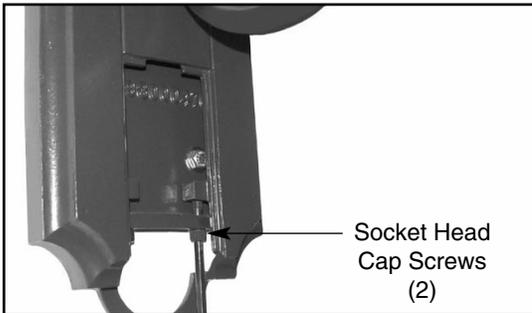

8. Attach wall plate cover assembly to wall plate. Secure with two (2) socket head cap screws. Connect wires observing polarity, i.e.; green-to-ground, white-to-common, and black-to-voltage.



9. Attach splice cover using the 10-32 flat head stainless steel socket screw.

### KIM LIGHTING LIMITED WARRANTY

When installed in accordance with Kim Installation Instructions and accepted trade practices, the following shall apply:

#### General Product Limited Warranty Coverage

All material and component parts used in the manufacture of Kim Products, are warranted to be free from defects of material and/or workmanship for a period of 1 year from date of sale, with the following exceptions:

#### Auxiliary Equipment

All auxiliary equipment (such as lamps, ballasts, and transformers) provided by and/or included in Kim Products shall carry the component manufacturer's warranty.

#### Copper and Bronze Landscape Components

Copper and Bronze Landscape fixture components shall be warranted against defects of material and/or workmanship, and failure due to corrosion, for a period of 25 years from date of sale.

#### Composite In-Grade Components

Composite In-Grade fixture components installed below grade, shall be warranted against defects of material and/or workmanship, and failure due to corrosion, for a period of 7 years from date of sale.

#### Aluminum Landscape Components

Aluminum Landscape fixture components not in direct contact with soil, shall be warranted against defects of material and/or workmanship for a period of 3 years from date of sale. Aluminum fixture components in direct contact with soil shall be warranted from defects of material and failure from corrosion for a period of 1 year from date of sale.

#### Limit of Liability and General Conditions

Only products which are installed, used and maintained in accordance with applicable Kim instructions, specifications and accepted trade practices, are covered by the Kim Warranty. During the warranty period, with proof of purchase, Kim will repair or replace with the same or similar product, at Kim's option, without charge. Labor costs are the owner's responsibility and are excluded from this warranty. This warranty is void if the product is modified, tampered with, misapplied, poorly installed, improperly maintained, or subjected to abnormal conditions.

Repair or replacement as provided under this warranty is the exclusive remedy of the purchaser. This warranty is in lieu of all other warranties, expressed or implied, including any implied warranty of fitness for a particular application. Kim Lighting shall not be liable to the purchaser for indirect or consequential damages.



How may we serve you better?  
Please let us know. Visit our website at:  
[www.kimlighting.com](http://www.kimlighting.com)  
Your concerns are important to us.