



**KIM LIGHTING**

16555 East Gale Avenue  
City of Industry, CA 91745-1788  
626/968-5666 • FAX 626/968-5716



**HUBBELL**  
Lighting



**BNB1 LED**

## BNB1-LED Bounce Bollard LED Installation Instructions



**WARNING: Fixtures must be grounded in accordance with local codes or the National Electrical Code. Failure to do so may result in serious personal injury.**

**NOTE: All wiring must be done by a qualified electrician.**

**KEEP THIS SHEET FOR FUTURE REFERENCE.**




Make certain the electrical supply is **OFF** before starting installation.

**Tools Required:**


$\frac{9}{16}$ " Wrench  
 Drive Ratchet

$\frac{1}{8}$ " Allen Wrench      $\frac{5}{32}$ " Allen Wrench  
 6" Extension      $\frac{9}{16}$ " Deep Socket


$\frac{3}{16}$ " Allen Wrench  
 12" Wooden Block

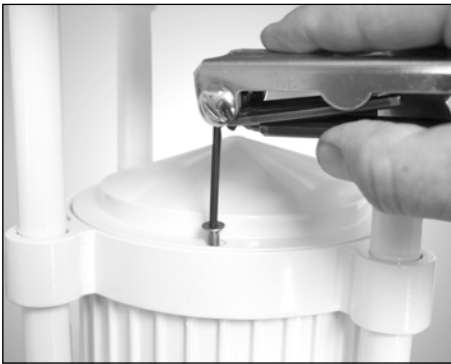


**1.** To install base casting to pre-set anchor bolts, base casting must be removed from fixture. Remove the 2 screws from splice compartment cover using  $\frac{1}{8}$ " allen wrench.

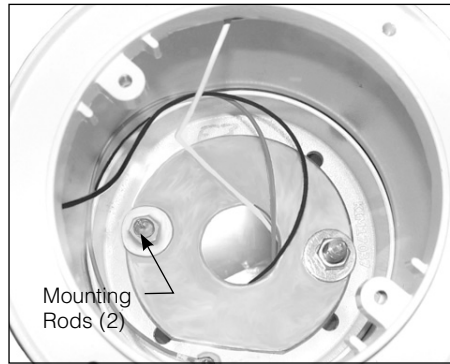


**2.** Remove the nuts & washer from the mounting rods using a  $\frac{9}{16}$ " deep socket, ratchet & extension.

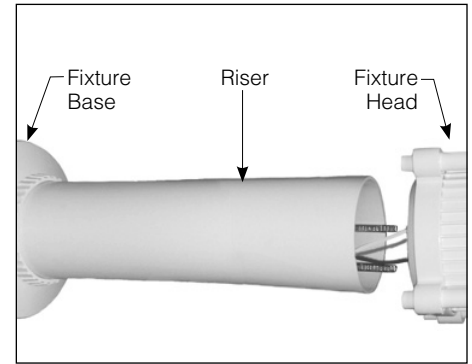


**3.** Lift off fixture head, riser and fixture base. To protect finish, lay on soft cloth.

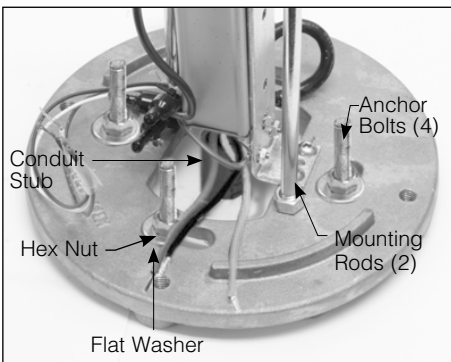

**4.** Install the base casting/driver assembly on the pre-set anchor bolts. Use flat washer and hex nuts both below and above the casting.  
**NOTE:** Conduit stub up 3" max. from grade.

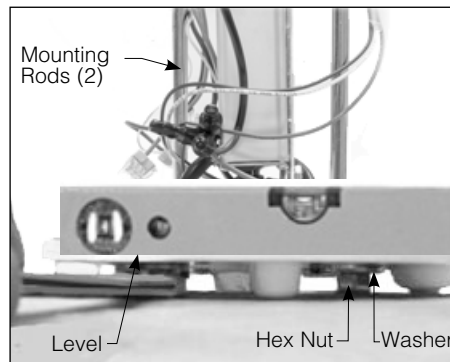

**5.** Level the top edge of the casting by adjusting the bottom leveling nuts using a  $\frac{9}{16}$ " wrench.

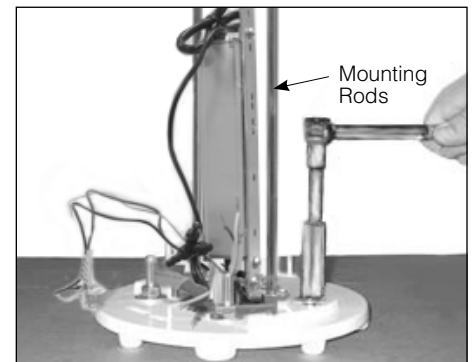


**6.** Tighten the upper nuts using a  $\frac{9}{16}$ " deep socket or wrench.

# BNB1-LED Bounce Bollard LED Installation Instructions

(Cont. from p.1)


 Make certain the electrical supply is **OFF** before starting installation.

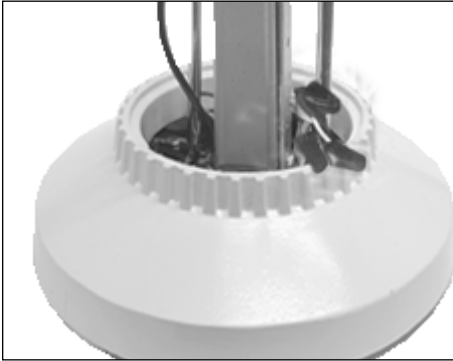


**7.** Connect power supply leads to the driver input leads, white-to-common, green-to-ground and black-to-voltage. Install fixture base over mounting rods.



**8.** Place wooden block, (by others), on top of driver assembly for easier wiring.

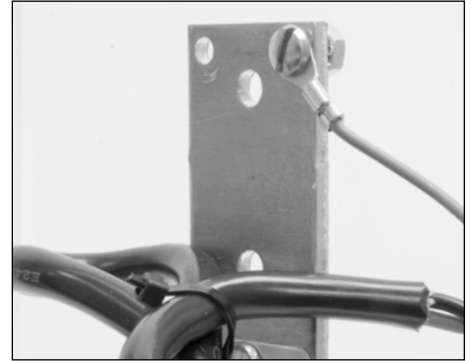

**9.** Connect green grounding wire from fixture head to the driver bracket.

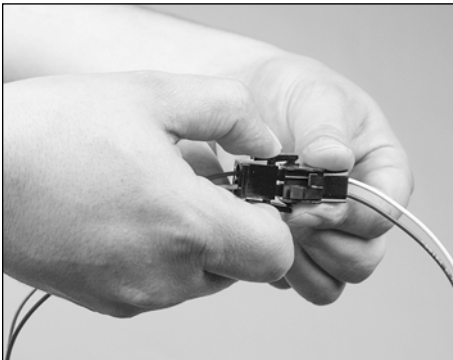


**10.** Connect quick-disconnects from fixture head to driver.



**10.** Remove wood block and slide riser & fixture head assembly over the mounting rods and driver assembly making sure not to pinch wires.



**11.** Lower fixture head over mounting rods .

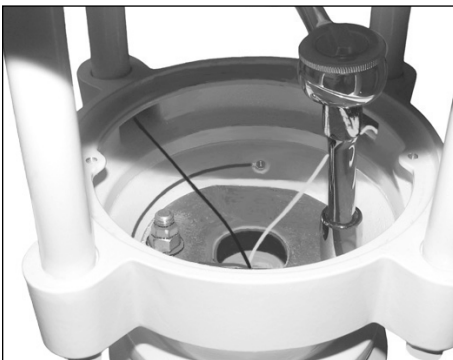


**13.** Install mounting collar over the mounting rods. Secure fixture with washer, nuts and jam nuts using  $\frac{3}{16}$ " deep socket and ratchet.



**14.** Install splice compartment cover with screws provided (2 places).

# BNB1-LED Bounce Bollard LED Installation Instructions

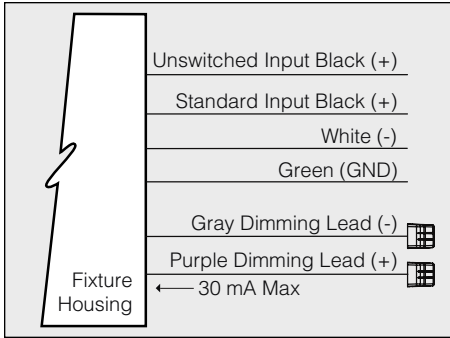

## 0-10V DIMMING

Driver has a 0-10V dimming interface with a dimming range of 10-100%. Is compatible with most control systems including Hubbell Building Automation wiHUBB™. Approved dimmers include Lutron Diva AVTV, Lutron Nova NFTV and NTFTV. Note: Not compatible with current sourcing dimmers. Controls compatible via Gray and Purple dimming lead.

## BATTERY BACKUP

If your fixture includes Battery Backup Option, an additional power wire is included labeled "Unswitched Power". This lead must be connected to an unswitched power source running 120-277 VAC to function properly.

## LED BOLLARD WARRANTY

When properly installed and under normal conditions of use, Kim Lighting warrants LED Bollard products ("Product(s)") sold by Kim Lighting to be free from defects in material and workmanship for (i) a period of five (5) years for metal parts, (ii) a period of ten (10) years for exterior housing paint finish(s), and, (iii) a period of six (6) years for LED Light Engines ( ) and, (iv) a period of five (5) years for LED power components (LED Driver), from the date of sale of such goods to the buyer as specified in Kim Lighting shipment documents for each Product(s). The buyer agrees to make all claims regarding defects or deficiencies in the Product(s) according to the terms of Kim Lighting's official warranty. Warranty claims must be made in writing according to Kim Lighting procedures existing at the time of the claim. Valid warranty claims must be made within the warranty period specified herein above, and submitted within thirty (30) days of discovery of the damage or defect. No FIELD labor, repair, DISMANTLE, or installation charges are included with this warranty. Kim Lighting may repair or replace any Product(s) covered by this warranty at its sole discretion and in accordance with its procedure. Any unauthorized return, repair, replacement or modification of the Product(s) shall void this warranty. This warranty applies only to the use of the Product(s) as intended by Kim Lighting and does not cover any misapplication or misuse of said Product(s), or installation in hazardous or corrosive environments. In no event shall Kim Lighting's total liability for any reason arising hereunder exceed the purchase price paid to Kim Lighting for the product purchased by the buyer hereunder. Contact Kim Lighting for complete warranty language, exceptions, and limitations.

## General Product Limited Warranty Coverage

All material and component parts used in the manufacture of Kim Products, are warranted to be free from defects of material and/or workmanship for a period of 1 year from date of sale, with the following exceptions:

### Auxiliary Equipment

All auxiliary equipment (such as drivers and battery backup) provided by and/or included in Kim Products shall carry the component manufacturer's warranty.

### Aluminum Landscape Components

Aluminum Landscape fixture components not in direct contact with soil, shall be warranted against defects of material and/or workmanship for a period of 3 years from date of sale. Aluminum fixture components in direct contact with soil shall be warranted from defects of material and failure from corrosion for a period of 1 year from date of sale.

### Limit of Liability and General Conditions

Only products which are installed, used and maintained in accordance with applicable Kim instructions, specifications and accepted trade practices, are covered by the Kim Warranty. During the warranty period, with proof of purchase, Kim will repair or replace with the same or similar product, at Kim's option, without charge. Labor costs are the owner's responsibility and are excluded from this warranty. This warranty is void if the product is modified, tampered with, misapplied, poorly installed, improperly maintained, or subjected to abnormal conditions.

Repair or replacement as provided under this warranty is the exclusive remedy of the purchaser. This warranty is in lieu of all other warranties, expressed or implied, including any implied warranty of fitness for a particular application. Kim Lighting shall not be liable to the purchaser for indirect or consequential damages.

