






REVISIONS			
REV.	DATE	DESCRIPTION	BY:
-	6/20/19	INITIAL RELEASE	DL

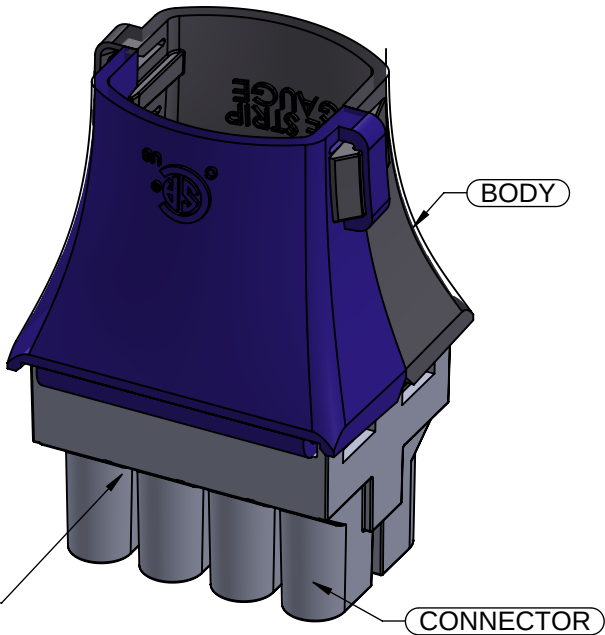


BODY	NYLON	
CONTACT	BRASS/STEEL	GALVANIZED
CONNECTOR	PC	
DESCRIPTION	MATERIAL	FINISH

LIST OF PARTS		
THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE		
TITLE: Winged Insulating Connector, 4 Pair		

TOLERANCE UNLESS OTHERWISE SPECIFIED .XX DECIMAL ±.015 .XXX DECIMAL ±.005 ANGLE ±2°		
	DRAWN BY:	DL
	APP. BY:	N.S.
	DATE:	06-20-19
		SCALE: 2:1

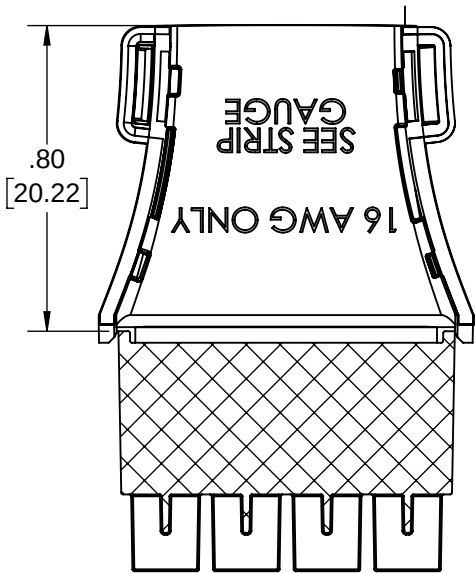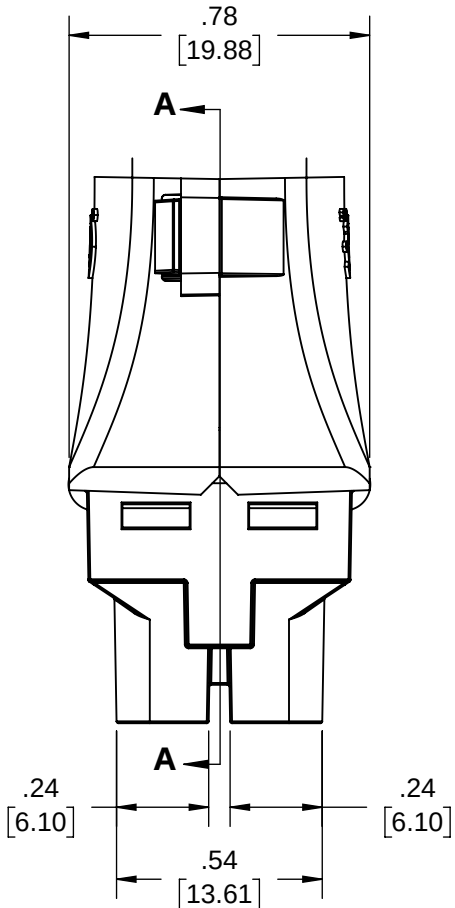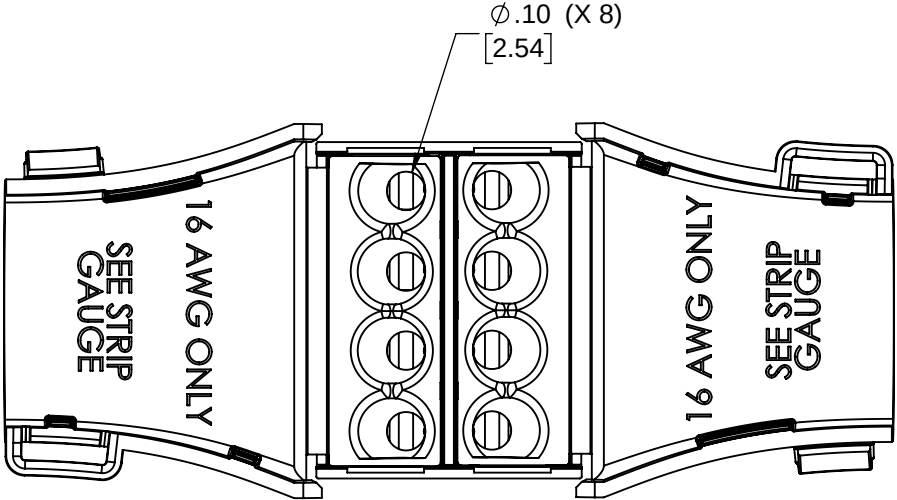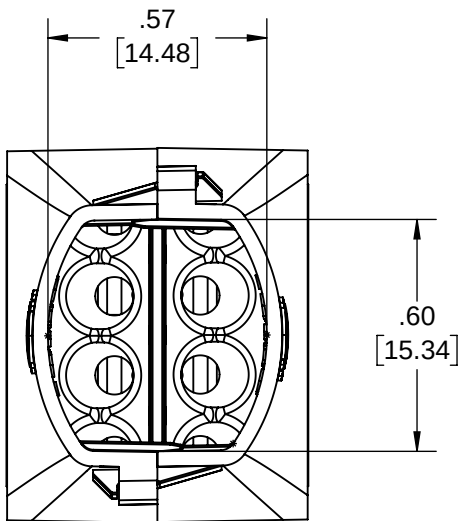

SECTION A-A

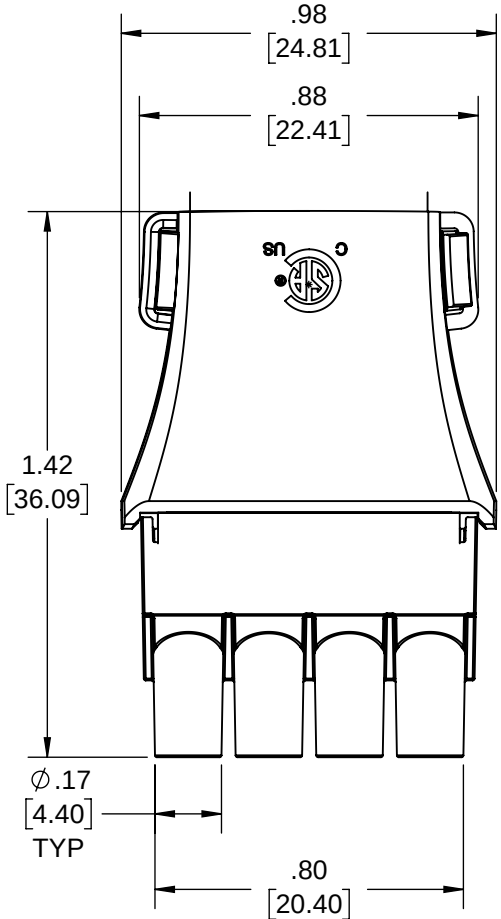


NOTES:
1. ALL DIMENSIONS ARE IN INCHES AND [MILLIMETERS]
2. cCSAus LISTED



Push-In Wire Connectors **For MC-PCS Lighting Control/Signal Circuits**

INSTRUCTIONS

- 1 Remove 1-1/8" (blue) outer jacket from each pair of control/signal wires per strip gauge.
- 2 Strip 3/8" insulation from individual control/signal wires (typically gray and purple) per strip gauge.
- 3 Fully insert stripped wires into ports, gray wires on gray side, purple wires on purple side. Connection ports are clear to confirm full wire insertion.
- 4 Group wire pairs together and snap close the shielding wings.



For permanent install only, not reusable. This product should be installed ONLY by an electrician or other qualified person in accordance with national and/or local code requirements.

16 AWG Solid Copper wire ONLY
COPPER TO COPPER ONLY. Not for use with Aluminum wire
Non-grounding/Bonding Special-use Connector
Not for use with grounding/bonding purposes/conductors
Max voltage 600V | Temp rating 105° C



HUBBELL **HUBBELL COMMERCIAL CONSTRUCTION**
A DIVISION OF HUBBELL INCORPORATED (DELAWARE)
www.hubbell.com/raco/en

MCPCS_NS_REV-A




Conectores de cable a presión

Para circuitos de control / señal de iluminación MC-PCS

INSTRUCCIONES

- 1 Retire 1-1/8" cubierta de alambre (azul) de cada par de alambres control / señal por calibre del cable.
- 2 Quite 3/8" de insulacion de los cables control / señal individuales (típicamente gris y morado) por calibre del cable.
- 3 Inserte completamente los cables pelados en los puertos, los cables grises en el lado gris y los cables morados en el lado morado. Los puertos de conexión son claros para confirmar la inserción completa del cable.
- 4 Agrupe los pares de cables y cierre las alas de protección.

Medidor para remover insulacion (escala 1: 1)



Solo para instalación permanente, no reutilizable. Este producto debe ser instalado ÚNICAMENTE por un electricista o por una persona calificada de acuerdo a las exigencias de los códigos nacionales y/o locales.

16 AWG cable de cobre sólido **SOLAMENTE**
COBRE A COBRE **SOLAMENTE**. No debe usarse con alambre de aluminio.
Conector de uso especial sin conexión a tierra
No debe utilizarse con fines de puesta a tierra / conexión / conductores
Tensión máxima 600V | Temperatura nominal de 105 ° C

Video de instrucciones (Inglés)



www.hubbell.com/raco/en/Videos/MC-PCS_Connectors



HUBBELL COMMERCIAL CONSTRUCTION
A DIVISION OF HUBBELL INCORPORATED (DELAWARE)
www.hubbell.com/raco/en