


TU-1D CUT SHEET

1 Way Copper Side Break Switch

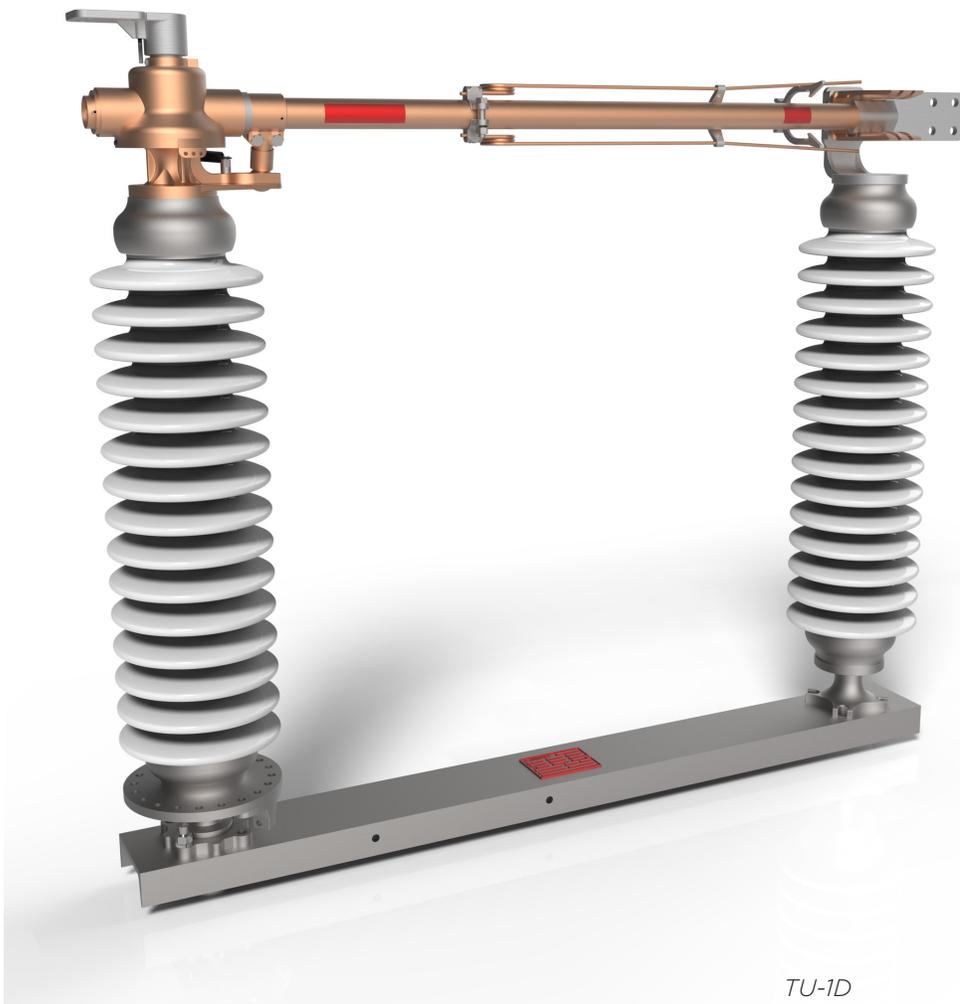

Hubbell has a policy of continuous product improvement. Please visit hubbellpowersystems.com to confirm current design specifications.

Product Information

Overview

The TU-1D 1-way switches mounting flexibility allows for horizontal, vertical, or underhung installation in substations.

Features of the TU-1D

- Simple Design—switch designed with minimal parts, simplifying the current transfer process
- Copper Design—hard-drawn tubular design provides the proper combination of current carrying capacity and rigidity.
- High Pressure Jaw—jaws are made from Beryllium copper, providing the highest conductivity and strength
- Blade Action—Both the blade and jaw contacts are wiped clean during the closing action to ensure a low resistance current transfer.
- High Speed Double Whips—all switches come with whips standard, breaking limited amounts of line charging current and keeping arcing away from the contact surfaces
- Blade Lock—A adjustable blade locking device keeps the blade closed despite temporary faults or surge currents.
- Current Transfer—There are only two current transfer points in the hinge. The terminal pad is threaded to a stationary contact block creating a spring loaded, silver to silver connection, and the housing transfer current to the blade via a silver rivets.
- Main Bearing Assembly And Stationary Insulator Mounting—The main pivot bearing assembly consists of two tapered roller bearings, which are adjusted and factory lubricated.
- Leveling—Leveling screws are provided on the movable and stationary insulator mounting flange for alignment of the insulator stacks. Three bolts are also on the jaw end for small final adjustments.
- Mounting—All frames are designed and constructed for termination of the transmission line a 10,000 pounds working load. Line angles at full tension are limited to +/-5 Degrees of 90 or 180 Degree dead end. If there is an application outside of these parameters, please contact the factory.



Accessories (Operating Mechanism complete with any of the following)

- Swing Handle (standard)
- Motor Operator

Load Break Devices

- TECO-Rupter™
 - Full Load Break
 - Loop Split
 - Line Charging
- High Speed Quick Whips

Configurations

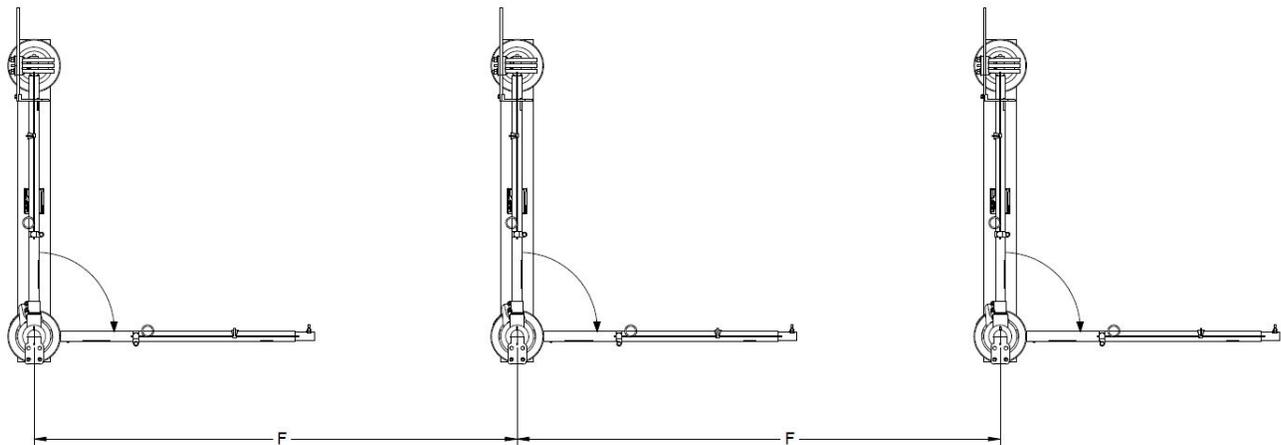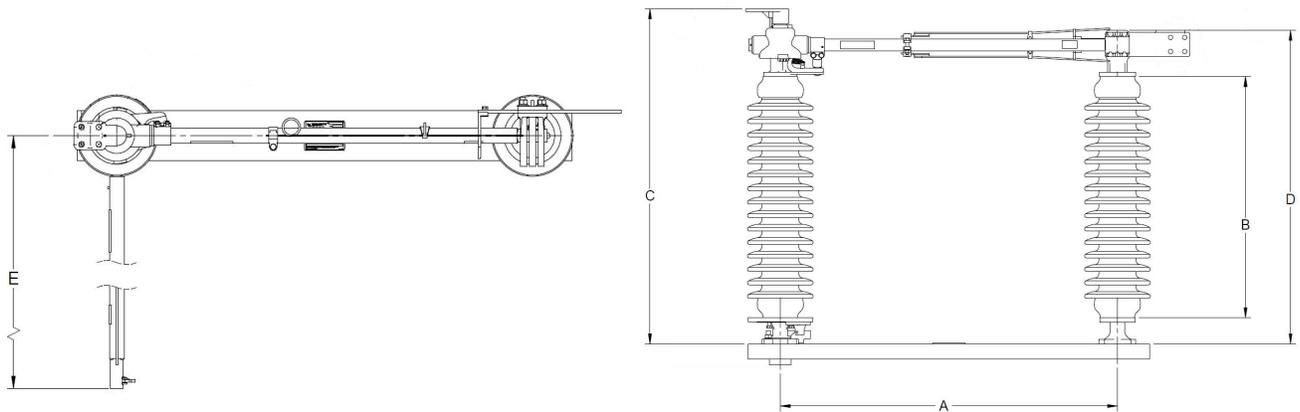

Dimensions (inches)						
kV	A	B	C	D	E	F
15	19	10	21 ³ / ₄	17 ¹ / ₄	19 ³ / ₈	33
27	22	14	25 ³ / ₄	21 ¹ / ₄	19 ³ / ₈	36
38	25	18	29 ³ / ₄	25 ¹ / ₄	25 ³ / ₈	48
48	30	22	33 ³ / ₄	29 ¹ / ₄	29 ³ / ₈	60
72	42	30	41 ³ / ₄	37 ¹ / ₄	37 ³ / ₈	84
123	60	45	59	54 ¹ / ₂	54 ³ / ₈	116
145	72	54	68	63 ¹ / ₂	63 ³ / ₈	147
170	84	62	79	72 ¹ / ₂	72 ³ / ₈	180

Numbering Sequence

TU-ID	M	V	A	I	P	TR	LB	OP
	V	15	6	INC	3	SEE CHART	QW	SH
	H	27	12	NA	5		VI	WG
	U	38	20	SIP				MO
		48		DS			LS	
		72					FL	
		123						
		145						
		170						

Variant Configuration Key

- M** - Mounting
- V** - Voltage (kV)
- A** - Current (A)
- I** - Insulator Ship Method
- P** - Pivot Size (inches)
- TR** - Insulator TR
- LB** - Load Break Device
- OP** - Operator

Insulator Shipping Methods

- INC** - With Insulators
- NA** - Insulators Not Included
- SIP** - Ship in Place
- DS** - Direct Ship

Load Break Devices

- QW** - Quick Whip
- VI** - Vacuum Interrupter
- FL** - Full Load
- LS** - Loop Split

Mounting

- V** - Vertical
- H** - Horizontal
- U** - Underhung

Example

TU-1DH07212INC3216VIFLSH

Operator

- SH** - Swing Handle
- MO** - Motor Operator

kV	BIL	TR	Whip Rating (A)	ACCC
15	110	205	24	D06
27	150	208	22	D06
38	200	210	18	D06
48	250	214	16	D06
72	350	216	12	D06
123	550	286	10	D06
145	650	288	10	D06
170	750	291	10	D06

Continuous Current (A)	Short Time Rating- 3 Sec (kA)	Peak Withstand Current (kA)
600	25	65
1200	38	99
2000	63	164

Hubbell Power Systems, Inc. | hubbellpowersystems.com



©Copyright 2017 Hubbell Incorporated. Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.

Printed in the U.S.A. | TD_10_151E

