



KIM LIGHTING

Traditional Floral **BN10 / BR12** 120 Volt Copper / Bronze, A-19 Incandescent

revision 2/19/09 • bn10br12.pdf

Type:

Job:

Fixture Catalog number:

Fixture and Finish

Mounting Options:

Ordered Separately from Fixture
See pages 2-3

Approvals:

Date:
Page: 1 of 3

Specifications

Hood: Spun copper.

Husk: Cast bronze.

Stem: 1/8" schedule 40 red brass pipe with 1/2" NPT stainless steel bushing at bottom for mounting.

Socket: Porcelain medium base with silicone lamp gasket.

Wiring: No. 18AWM rated 105°C.

Finish: **(BN10)** Acid etched verde green patina.
(BR12) Natural copper.

Certification: UL Listed to U.S. and Canadian safety standards for wet locations.

ORDERING INFORMATION

Fixture

Finish

BN10

Verde Patina

BR12


Natural

Wattage / Lamp

40W

A-19

Incandescent

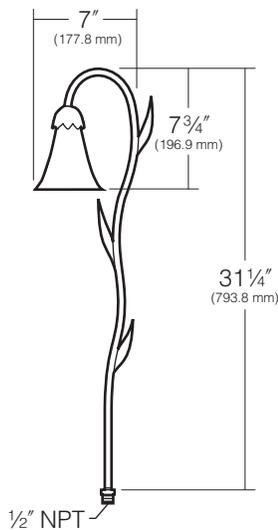

KIM LIGHTING RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

Type:
 Job:



Mounting Options

Ordered Separately from Fixture

Landscape Light Post by Engineered Products Co.


- Cat. No.
 EP17
 No Option

PVC fixture molded in black with 1/2" NPT mount is corrosion free and UV resistant. Replaces EMT, conduit connectors and weatherproof boxes. 100% shatter resistant against denting and cracking. Angled bottom to eliminate cable congestion.

17 1/2" post length

NOTE: EP17 should be used with a UL listed fixture and grounding means (i.e., third wire) suitable for use in wet locations.

"x" = required depth of conduit per local codes.

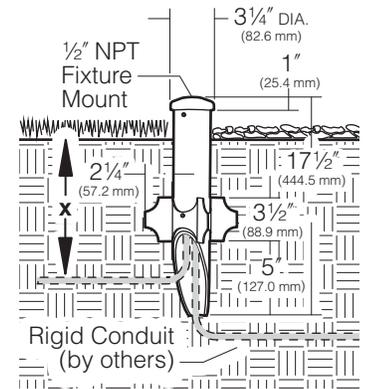

Architectural Junction Box


- Cat. No. Finish
 JB1/BL Black
 JB1/DB Dark Bronze
 JB1/GR Verde Green
 No Option

Die-cast aluminum with 1/2" NPSM fixture mount. Internal set screw provided for locking position. Two 1/2" NPSM in bottom, 17 cu in. internal volume. Super TGIC powder coat paint over clear anodizing and titanated zirconium conversion coating.

Application Notes

- Elevates Accent Lights above ground cover to prevent foliage from blocking the light.
- Elevates Path Lights above ground cover to achieve a greater light throw.


CAUTION: Junction box must be installed high enough to avoid contact with soil or standing water.

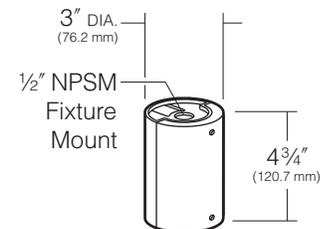

Portable Spear Mount

- Cat. No.
 J-25N
 No Option

Cast iron with 1/2" NPSM fixture mount. Hot dip galvanized finish. 5.5 cu in. splice compartment. (SJTW-A) 3 wire cord and plug.
 9' cord length

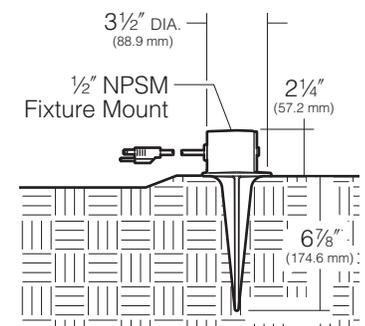

Type:

Job:

Page: 3 of 3



Mounting Options

Ordered Separately from Fixture

Brass In-grade Architectural Junction Box

Cat. No.

- JBR-2
 JBR-3
 JBR-21
 JBR-24
 No Option

Die-cast brass with 1/2" NPSM fixture mount and die-cast cover. Internal set screw provided for locking position. 18 cu in. internal volume.

- JBR-2** (2) 1/2" NPT in bottom
JBR-3 (2) 3/4" NPT in bottom
JBR-21 (2) 1/2" NPT in sides, (2) 1/2" NPT in bottom
JBR-24 (4) 1/2" NPT in sides, (2) 1/2" NPT in bottom

All side taps provided with plugs.


25 Year Limited Warranty:

Solid brass junction boxes are warranted for 25 years, from date of sale, against manufacturing defects and failure due to corrosion.

Application Notes

- Creates a flush-mounted appearance.
- May be cast in concrete for increased stability.

CAUTION: Fixture stem and swivel must not contact soil or standing water. Provide drainage away from junction box.

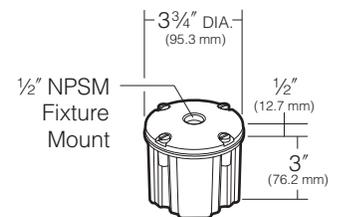

Brass In-grade Staked Junction Box

Cat. No.

- JBR30
 No Option

JBR30 BRASS IN-GRADE STAKED JUNCTION BOX

Die-cast brass with 1/2" NPSM fixture mount and die-cast cover. Internal set screw provided for locking position. 18 cu in. internal volume.

(2) 1/2" NPT in bottom with (2) 19" long brass stakes

Brass In-grade Staked Junction Box with Cord

Cat. No.

- JBR32
 No Option

JBR32 BRASS IN-GRADE STAKED JUNCTION BOX WITH CORD

Die-cast brass with 1/2" NPSM fixture mount and die-cast cover. Internal set screw provided for locking position. 18 cu in. internal volume. (SJTW-A) 3 wire cord and plug.

(2) 19" long brass stakes with 9' cord

25 Year Limited Warranty:

Solid brass junction boxes are warranted for 25 years, from date of sale, against manufacturing defects and failure due to corrosion.

Application Notes

- Creates a flush-mounted appearance.
- May be cast in concrete for increased stability.

CAUTION: Fixture stem and swivel must not contact soil or standing water. Provide drainage away from junction box.

