


Diagram 1



Primary Volts	%	Connect Leads to Tap No.
483	105	1
472	102.5	2
460	100	3
449	97.5	4
437	95	5
Secondary Volts		
460		X1, X2, X3
266		X1 & X0
1 phase		X2 & X0
		X3 & X0

PRIMARY: 460 Volts Delta  
SECONDARY: 460Y/266 Volts  
TAPS: 2-2 1/2% ANFC and BNFC

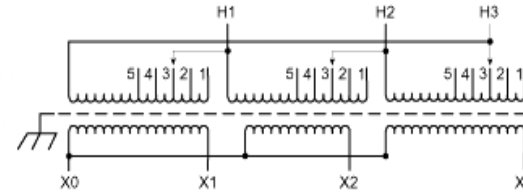

KVA	CATALOG NUMBER	VOLTAGE		WIRING DIAGRAM	WEIGHT	PHASE	FREQ.
		HIGH	LOW				
145	DTGB-0145-4S	460	460Y/26	1	990 Lbs	3	60 Hz

TYPICAL PERFORMANCE DATA

Winding Rise	150°C
Insulation	220°C
Sound Level	50 dB

Regulation @ 100%	2.156 %
-------------------	---------

Impedance	5.269 %
-----------	---------

Typical Efficiency	98.42%
No Load Losses	
Full Load Losses	

Type No.

						A	PRINTS TO	CONTROL 7	A
--	--	--	--	--	--	---	-----------	-----------	---