

INSTALLATION INSTRUCTIONS

FIXTURE TYPE _____

**WALL MOUNTING BRACKETS
W-ID-4600**

P/C 510484-1000

DATE: 1-10-06

PG. 1 OF 1


DO NOT MODIFY OR ALTER THIS PRODUCT IN ANY WAY, OR INSTALL IN ANY FASHION WHICH IS CONTRARY TO THE INSTRUCTIONS CONTAINED HEREIN. IF YOU HAVE ANY QUESTIONS REGARDING THIS PRODUCT OR THE INSTALLATION OF IT, PLEASE CALL LITECONTROL ENGINEERING AT 781-294-0100.

GENERAL NOTES:



REFER TO FIXTURE INSTALLATION INSTRUCTIONS P/C 510485 FOR LOCATIONS OF WALL BRACKETS. FIXTURE TOP REFLECTORS MUST BE REMOVED TO ALLOW FOR WALL BRACKET ATTACHMENT. ALTHOUGH FIXTURE LAMPING MAY VARY, INSTALLATION IS THE SAME FOR ALL FIXTURES.

INSTRUCTIONS:

1. MARK A STRAIGHT LINE ON MOUNTING WALL AT CORRECT HEIGHT. CAREFULLY PRE-POSITION BRACKETS ON WALL AT CORRECT DISTANCES FROM EACH OTHER AND MARK LOCATIONS OF MOUNTING HOLES.
2. WHEN ATTACHING WALL BRACKET OVER AN ELECTRICAL BOX USE EITHER A 2" X 4" HANDY BOX MOUNTED HORIZONTALLY OR A 3-1/2" OCTAGONAL BOX. NOTE: ELECTRICAL BOX MUST BE ADEQUATELY ATTACHED TO STRUCTURE FOR SUPPORTING FIXTURE WEIGHT.
3. MOUNT THE FIRST AND LAST WALL BRACKET IN A ROW OF FIXTURES THRU #10 MOUNTING HOLES. USE CORRECT ANCHORING TO INSURE THAT FIXTURE WILL NOT PULL AWAY FROM WALL WHEN ATTACHED. RUN A STRING BETWEEN THE TWO BRACKET STUDS AND MOUNT ALL OTHER BRACKETS BETWEEN THEM MAKING SURE THAT THEY ARE "FLUSH" WITH STRING. IF REQUIRED USE SHIM(S) (SUPPLIED BY CONTRACTOR) BETWEEN WALL SURFACE AND BACK OF BRACKETS. SEE VIEWS BELOW.
4. MOUNT FIXTURE TO WALL BRACKETS WITH FLANGE NUTS SHIPPED WITH BRACKETS

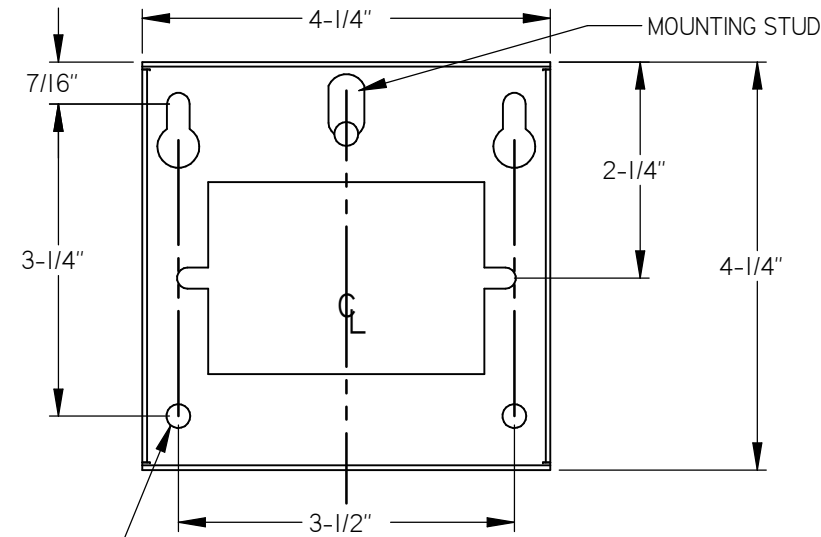

WALL BRACKET DETAIL

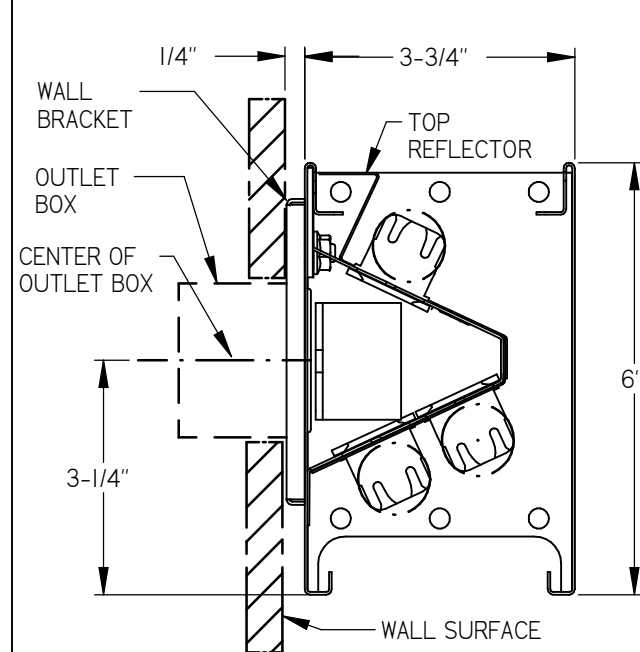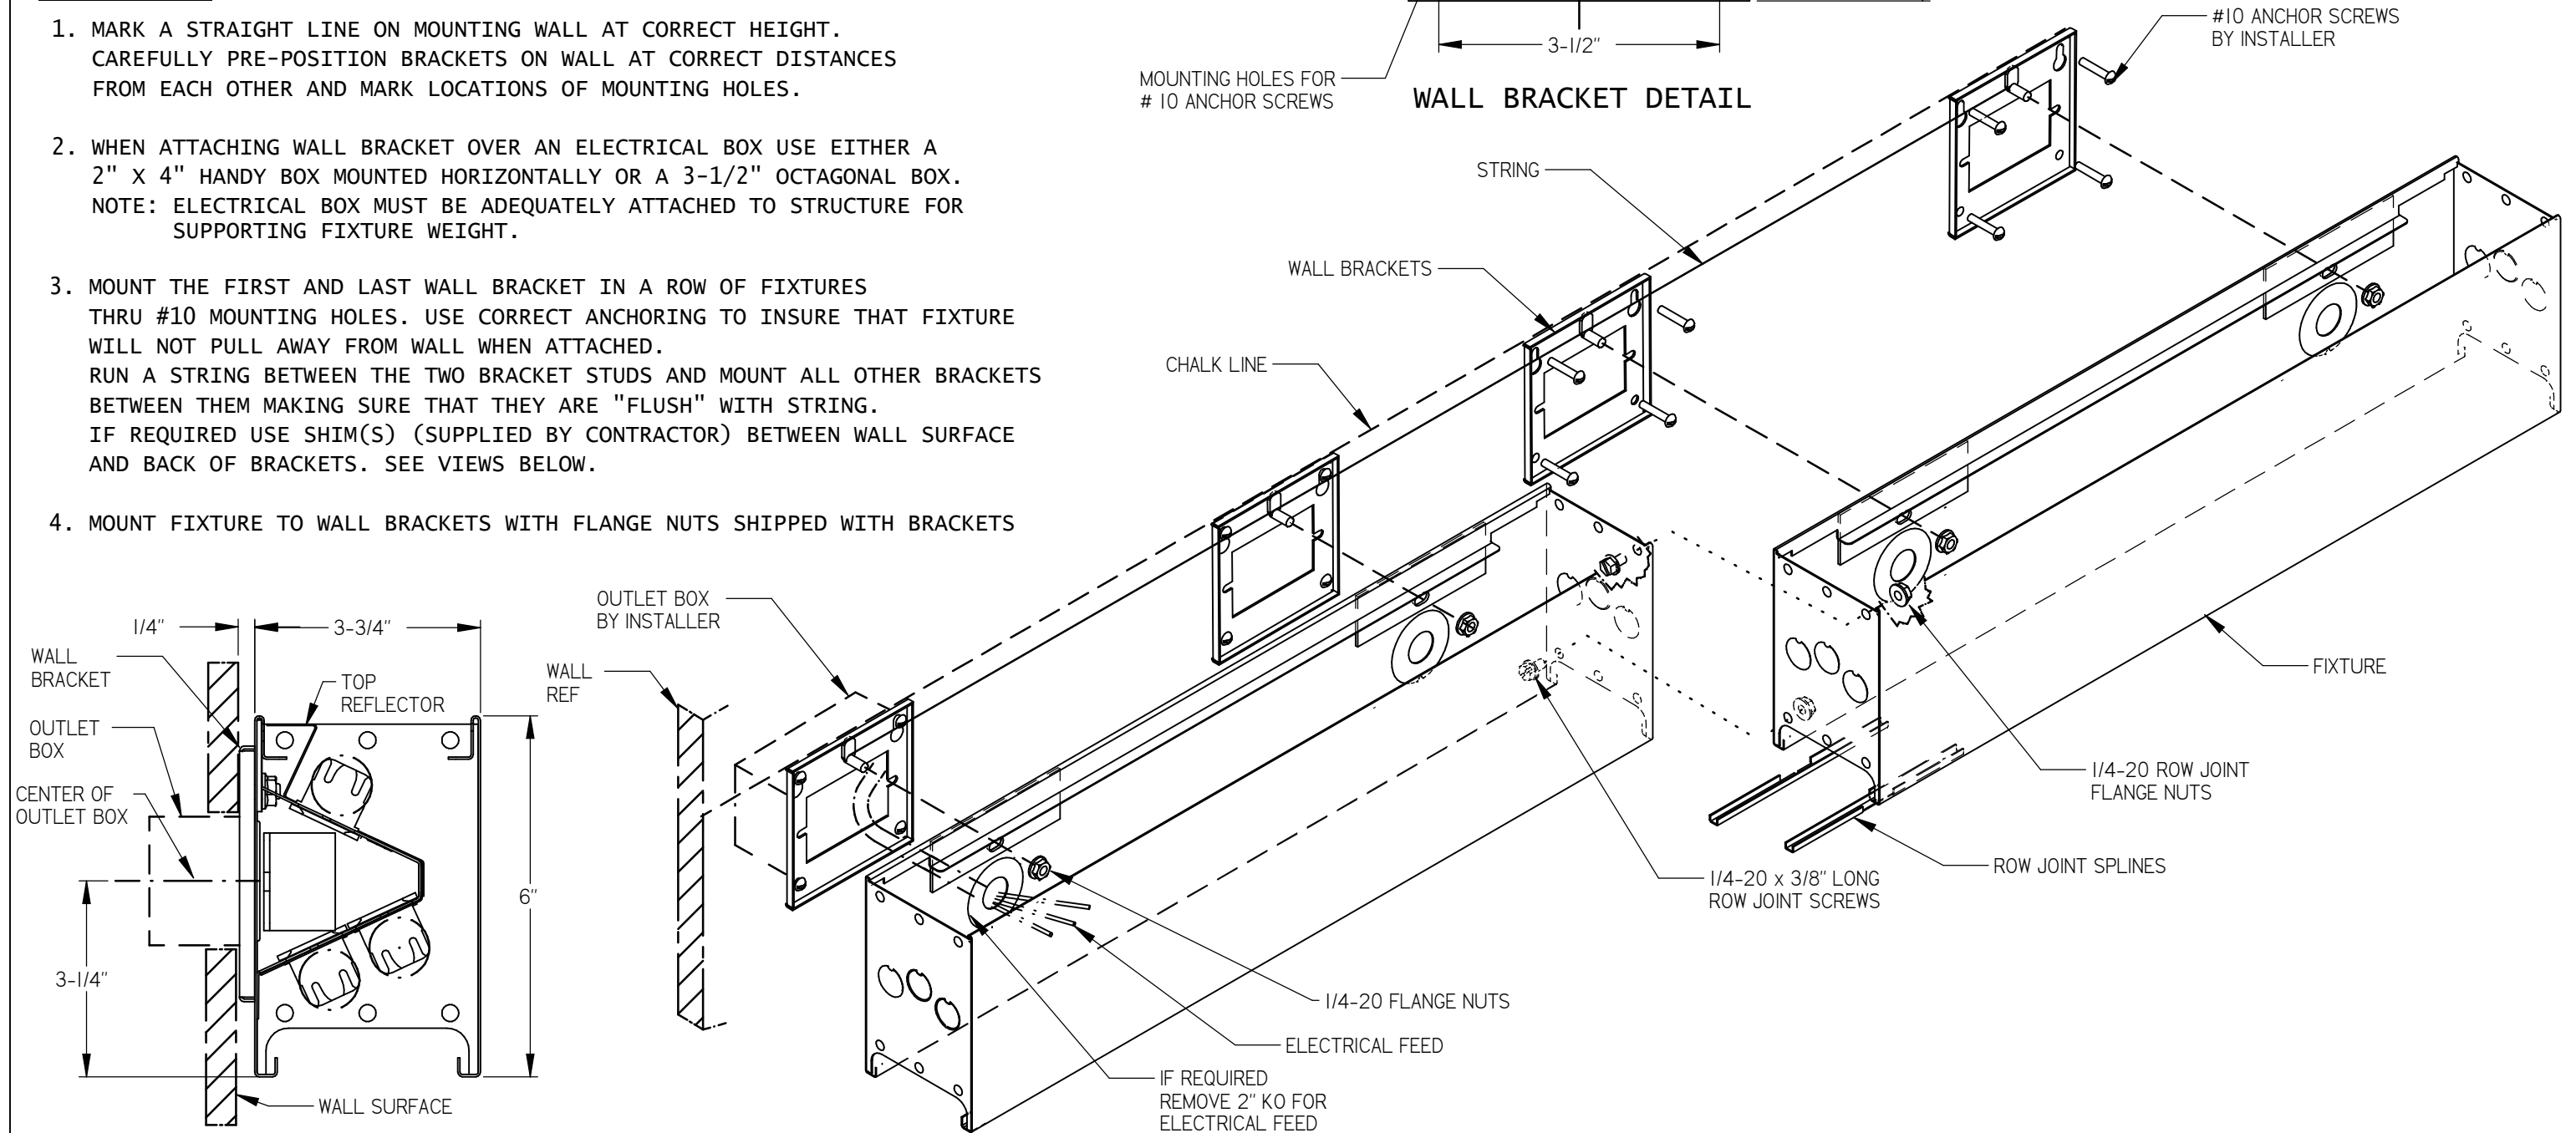

CROSS SECTION

LITECONTROL

100 HAWKS AVENUE - HANSON MA 02341, (781-294-0100)