


Concrete Collar Application:

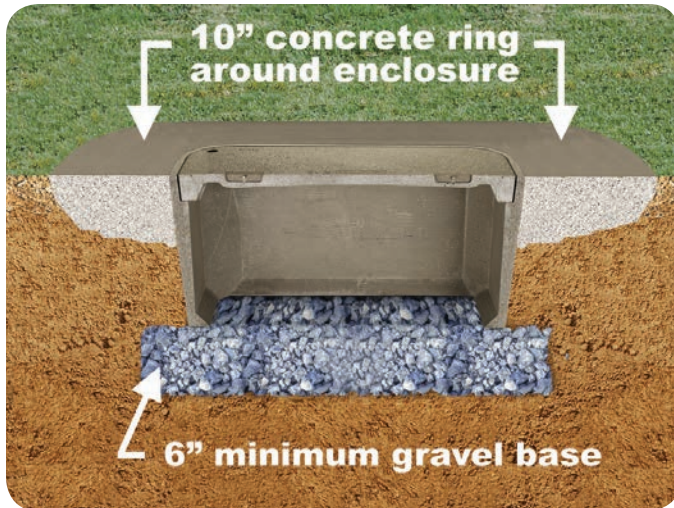

Concrete collars may be desired to give added protection to Hubbell enclosures installed by driveways, parking lots, and off-roadway areas that are subject to occasional non-deliberate traffic. Concrete collars are not necessary in grassy areas or areas subject solely to pedestrian traffic.

*Notes:

- Concrete encasement to be 3,000 psi minimum
- Concrete encasement collar dimension, D, to be equal to design pavement depth
- Pavement and subgrade to be as shown on the engineering plans

