C\$MPASS




INSTALLATION .

Ceiling & End Mounting

- 1. Connect input as shown in wiring diagram below and fasten canopy to J-box bracket.
- 2. Snap housing to canopy.
- 3. Secure faceplate to housing and remove the proper arrow as required.


Warning: Unused wires must be capped using enclosed wire nuts





(FIG.1)

(FIG.2)

- 1. The unit is shipped from the factory with the color selector jumper set to "RED" (see figure 2 jumper is placed across pins 2&3) and use the red diffuser.
- 2. To change the color to "GREEN", move the color selector jumper to "GREEN" (see figure I -jumper is placed across pins 1&2) and use the green diffuser.

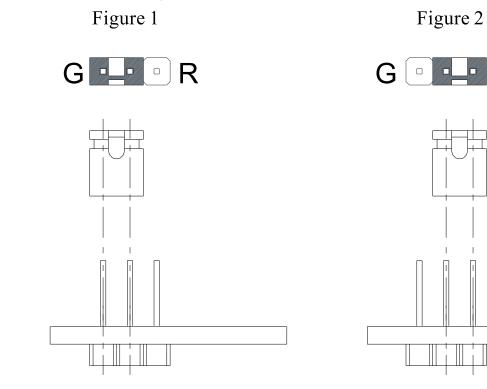



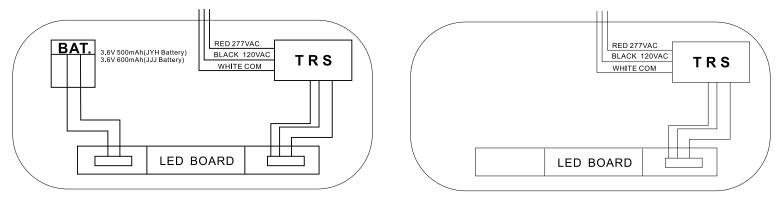

CERG, CERGB

CARG, CARGB



