

# 240WM-00x/241WM-00x Communication Station Pole Mounting Kit

#### Model 231-003

## **Confidentiality Notice**

This manual is provided solely as an installation, operation, and maintenance guide and contains sensitive business and technical information that is confidential and proprietary to GAI-Tronics. GAI-Tronics retains all intellectual property and other rights in or to the information contained herein, and such information may only be used in connection with the operation of your GAI-Tronics product or system. This manual may not be disclosed in any form, in whole or in part, directly or indirectly, to any third party.

#### **General Information**

Use the Model 231-003 Pole Mounting Kit to mount a GAI-Tronics Model 240WM-00x or 241WM-00x communication station (purchased separately) to a pole up to 3.625-inches in diameter. This kit also allows surface mounting and mounting to a larger diameter pole or wood pole with additional, customer supplied hardware. Refer to the ADA (Americans with Disabilities Act) for telephone mounting requirements (visit ada.gov). This kit includes the following components:

Qty	Description
1	Mounting Bracket
3	3/8-16 U-bolts with nuts and mounting clamps
4	$1/4-20 \times 1/2$ -inch hex head bolts
4	1/4-inch washers
4	1/4-inch lock washers

### Installation

1. 3 5/8-inch diameter pole mounting:

Secure the mounting bracket to the pole using the 3/8-16 U-bolts with the nuts and washers provided (see Figure 1 and Figure 2).

Larger diameter pole mounting:

Use four (customer supplied) banding straps through the slots provided in the mounting bracket to fasten the bracket to the pole (see <u>Figure 1</u>).

Wooden pole and surface mounting:

Use three (customer supplied) 3/8-inch lag bolts to secure the mounting bracket to the pole or surface through the three 0.438-inch diameter center holes in the mounting bracket (see <u>Figure 1</u>).

- 2. Mount the communication station's rear mounting panel to the mounting bracket using the four 1/4- $20 \times 1/2$ -inch hex head bolts, washers, and lock-washers.
- 3. Complete the installation of the 240WM-00x/241WM-00x communication station; following the instructions included with the station.

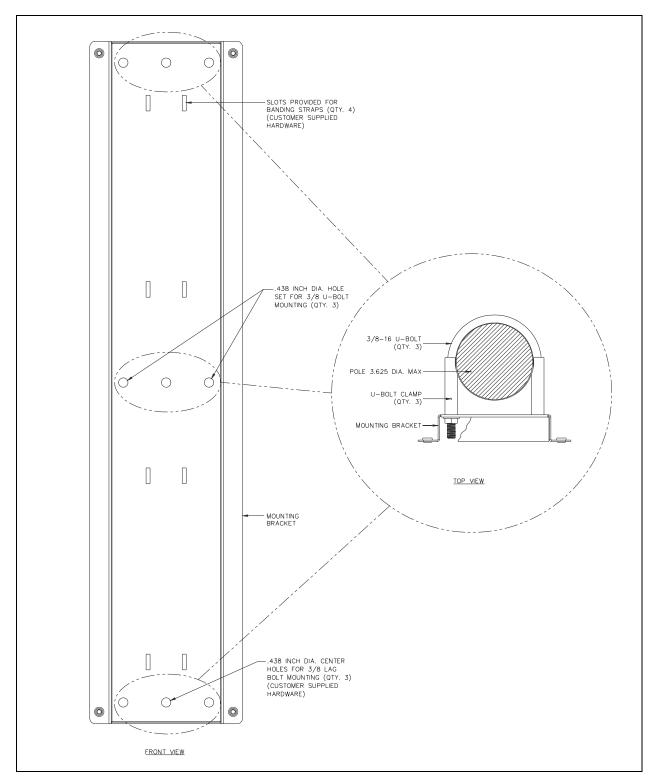


Figure 1. Pole Mounting Bracket Installation Detail

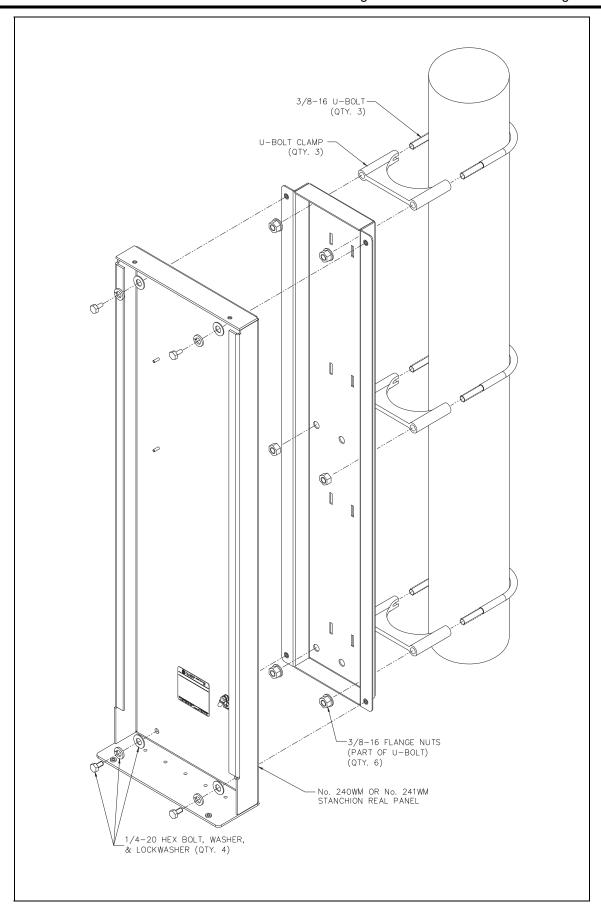


Figure 2. Bracket and Enclosure Installation

## Warranty

Equipment. GAI-Tronics warrants for a period of one (1) year from the date of shipment, that any GAI-Tronics equipment supplied hereunder shall be free of defects in material and workmanship, shall comply with the then-current product specifications and product literature, and if applicable, shall be fit for the purpose specified in the agreed-upon quotation or proposal document. If (a) Seller's goods prove to be defective in workmanship and/or material under normal and proper usage, or unfit for the purpose specified and agreed upon, and (b) Buyer's claim is made within the warranty period set forth above, Buyer may return such goods to GAI-Tronics' nearest depot repair facility, freight prepaid, at which time they will be repaired or replaced, at Seller's option, without charge to Buyer. Repair or replacement shall be Buyer's sole and exclusive remedy. The warranty period on any repaired or replacement equipment shall be the greater of the ninety (90) day repair warranty or one (1) year from the date the original equipment was shipped. In no event shall GAI-Tronics warranty obligations with respect to equipment exceed 100% of the total cost of the equipment supplied hereunder. Buyer may also be entitled to the manufacturer's warranty on any third-party goods supplied by GAI-Tronics hereunder. The applicability of any such third-party warranty will be determined by GAI-Tronics.

<u>Services.</u> Any services GAI-Tronics provides hereunder, whether directly or through subcontractors, shall be performed in accordance with the standard of care with which such services are normally provided in the industry. If the services fail to meet the applicable industry standard, GAI-Tronics will re-perform such services at no cost to buyer to correct said deficiency to Company's satisfaction provided any and all issues are identified prior to the demobilization of the Contractor's personnel from the work site. Re-performance of services shall be Buyer's sole and exclusive remedy, and in no event shall GAI-Tronics warranty obligations with respect to services exceed 100% of the total cost of the services provided hereunder.

<u>Warranty Periods.</u> Every claim by Buyer alleging a defect in the goods and/or services provided hereunder shall be deemed waived unless such claim is made in writing within the applicable warranty periods as set forth above. Provided, however, that if the defect complained of is latent and not discoverable within the above warranty periods, every claim arising on account of such latent defect shall be deemed waived unless it is made in writing within a reasonable time after such latent defect is or should have been discovered by Buyer.

<u>Limitations / Exclusions.</u> The warranties herein shall not apply to, and GAI-Tronics shall not be responsible for, any damage to the goods or failure of the services supplied hereunder, to the extent caused by Buyer's neglect, failure to follow operational and maintenance procedures provided with the equipment, or the use of technicians not specifically authorized by GAI-Tronics to maintain or service the equipment. THE WARRANTIES AND REMEDIES CONTAINED HEREIN ARE IN LIEU OF AND EXCLUDE ALL OTHER WARRANTIES AND REMEDIES, WHETHER EXPRESS OR IMPLIED BY OPERATION OF LAW OR OTHERWISE, INCLUDING ANY WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

## **Return Policy**

If the equipment requires service, contact your Regional Service Center for a return authorization number (RA#). Equipment should be shipped prepaid to GAI-Tronics with a return authorization number and a purchase order number. If the equipment is under warranty, repairs or a replacement will be made in accordance with the warranty policy set forth above. Please include a written explanation of all defects to assist our technicians in their troubleshooting efforts.

Call 800-492-1212 (inside the USA) or 610-777-1374 (outside the USA) for help identifying the Regional Service Center closest to you.