

Electric Vehicle Charger Receptacle

EV GRADE ENSURES SUPERIOR PERFORMANCE AND SAFETY!

Install the EV Grade receptacle recommended for all electric vehicle manufacturers. Designed specifically for continuous, hours-long operation during charging. 50A provides up to 13 miles more driving range per hour of charge than 30A receptacles.

- NEMA 14-50, the most popular type for EVSE
- 50A, 125/250V, 3 pole, 4 wire grounding
- Molded-in catalog number, ratings, certifications on the face
- Single-piece contacts reduce the risk of overheating
- UL Listed, CSA Certified
- NEMA WD-6 Compliant

Accept no substitutes! Offer your customers Hubbell performance, quality, and reliability—perfect for DOE Zero Energy Ready homes.

ORDERING INFORMATION


Description	Rating	Poles/Wires	Configuration	Catalog Number
	50A 250V	2P/3W	6-50R	HBL9367
Receptacle, black RTP	30A 125/250V	3P/4W	14-30R	HBL9430A
	50A 125/250V	3P/4W	14-50R	HBL9450A





Electric Vehicle Charger Receptacle

Product Dimensions

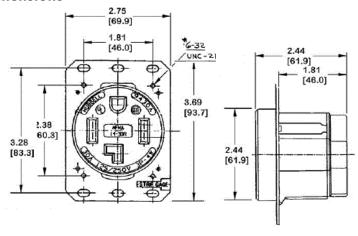

Technical Information

п				٠.						
	Р	\sim	rτ	O	١r	m	เล	n	C	=

renomance	
ELECTRICAL	
Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum
MECHANICAL	
Product Identification	Ratings are a permanent part of the device
Terminal Accommodation	#12 AWG through #4 AWG copper wire only
Terminal Identification	Terminals identified in accordance with UL 498 and CSA
ENVIRONMENTAL	
Flammability	UL 94 V-0
IP Suitability	IP20
Operating Temperatures	Maximum continuous 75°C; minimum -40°C (w/o impact)

Specifications

Housing	Reinforced Thermoplastic Polyester
Mounting Plate	.062 in. (1.5) Pre-Plated Steel
Contacts	Brass
Ground Shunt	Brass
Box Terminals	Copper

A proud member of the Hubbell family.

Listings

UL Listed File E2186 CSA Certified NEMA® WD-6 Compliant

Contact your local Hubbell representative today to find out more or request a sample

