RDC/QS Guide

REGIONAL DISTRIBUTION CENTER STOCK AND QUICK-SHIP PRODUCT GUIDE

EFFECTIVE NOVEMBER 17, 2020

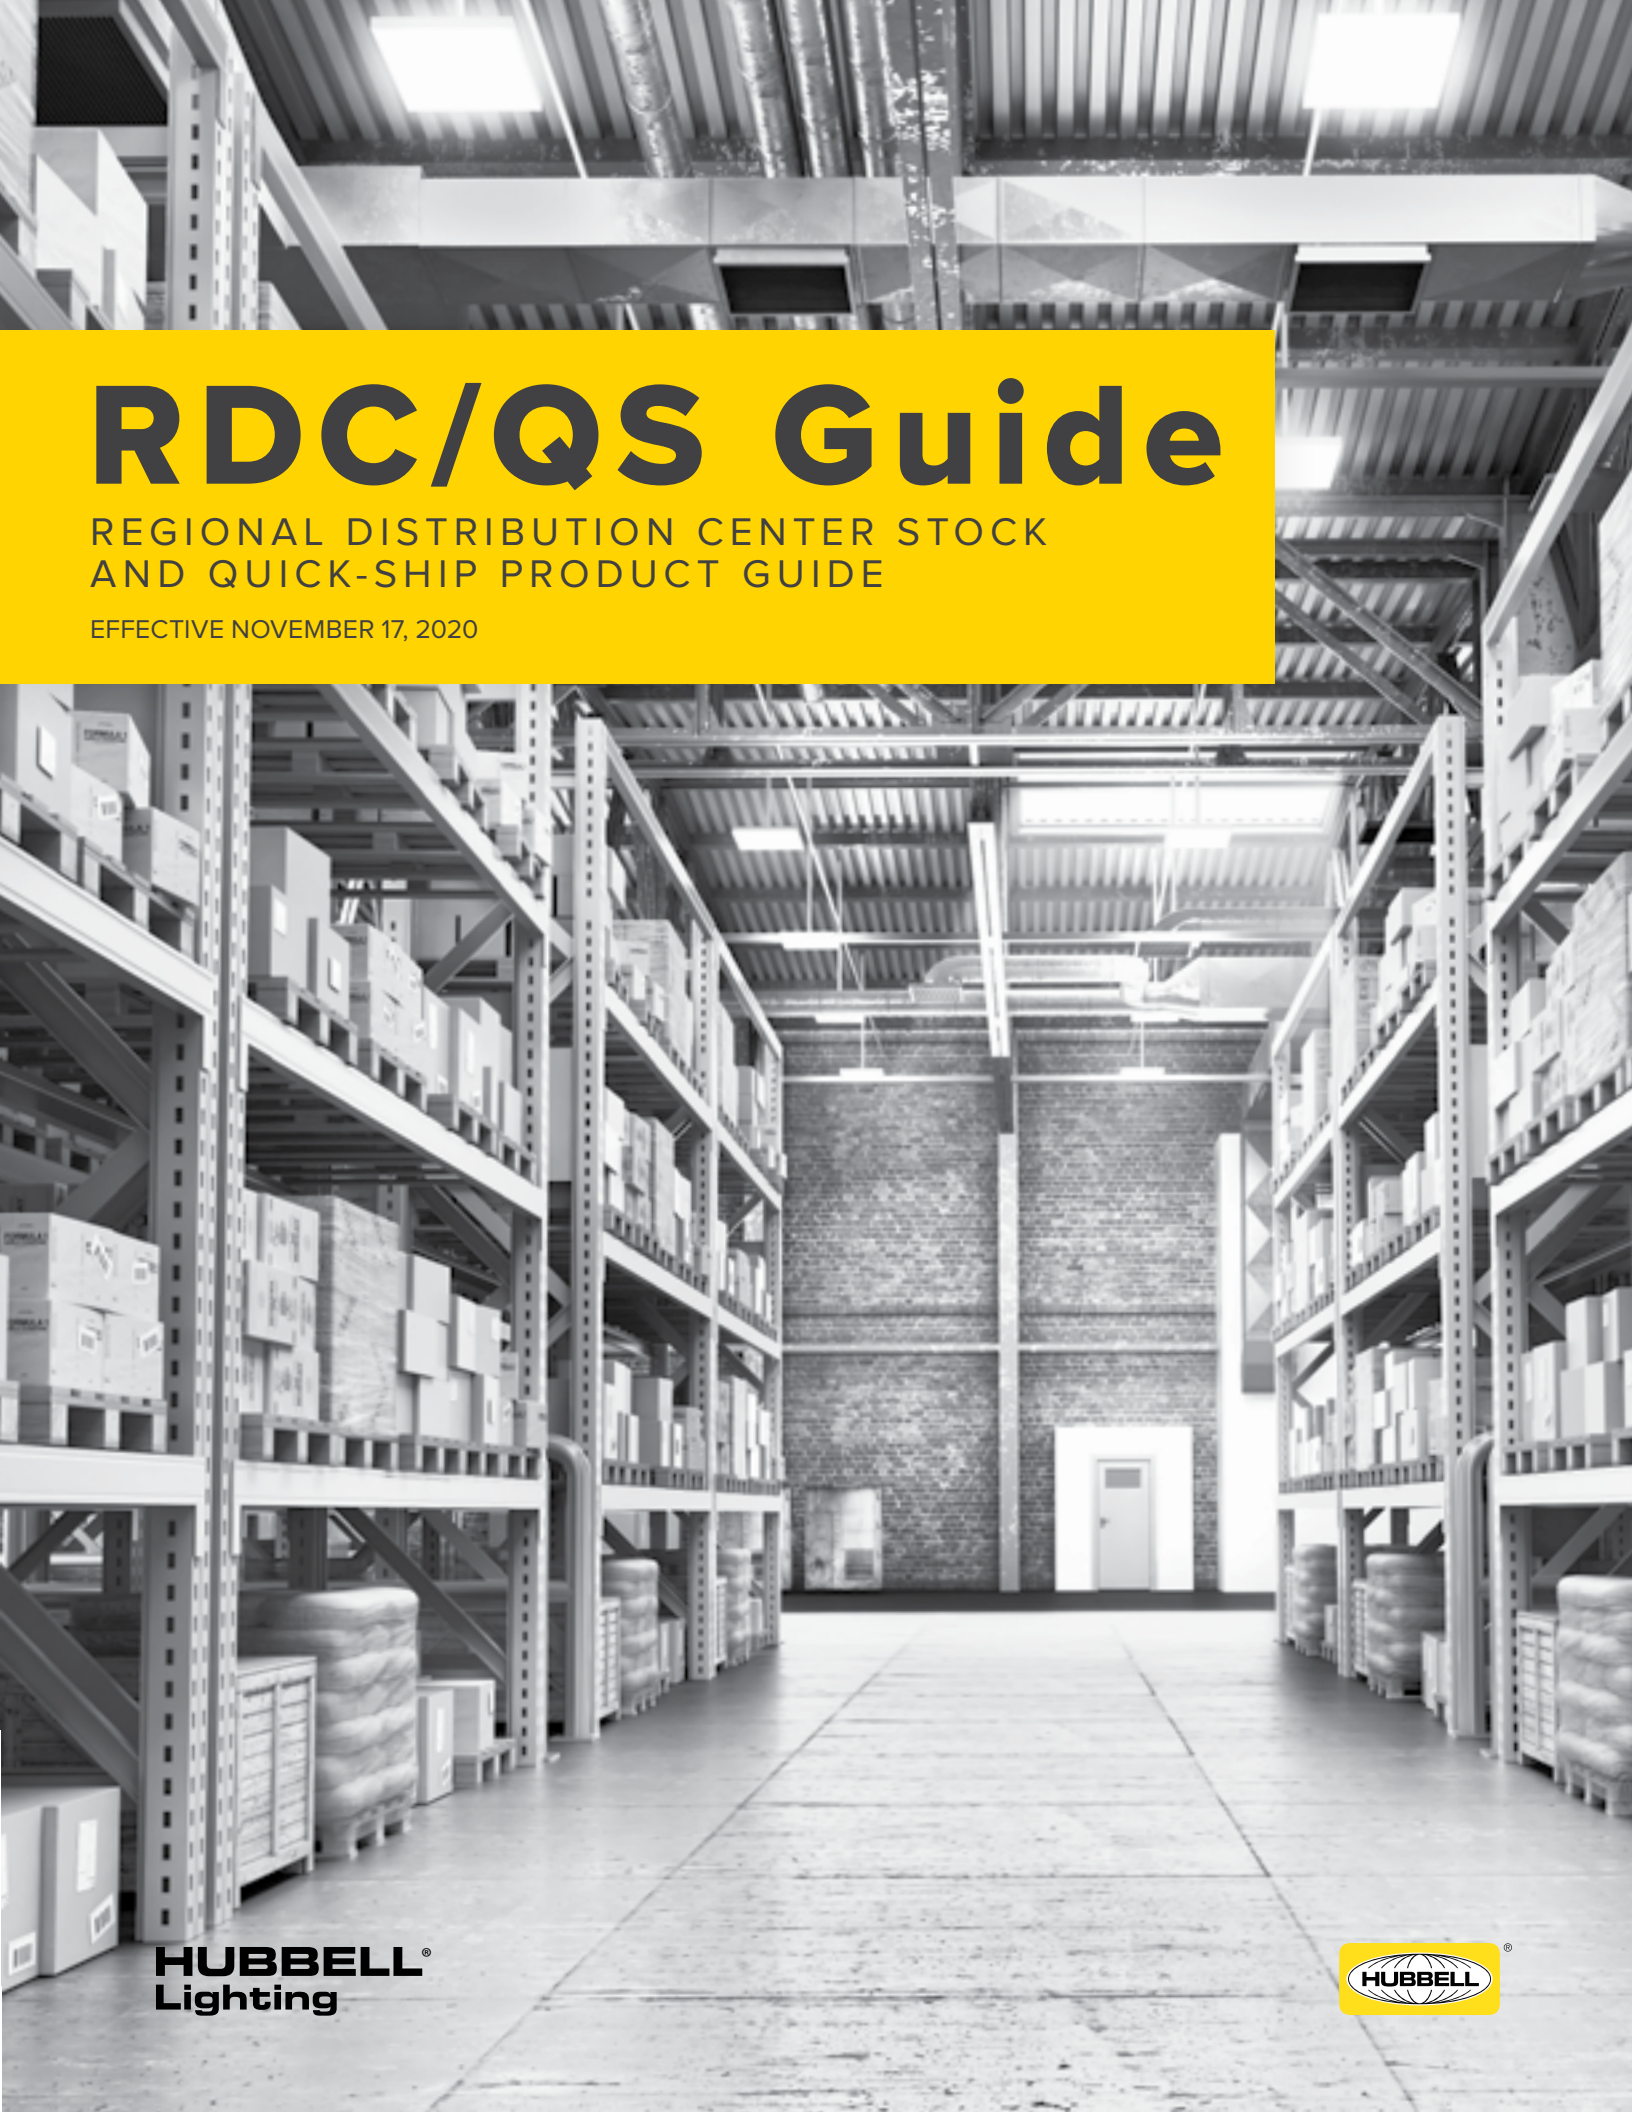

HUBBELL® Lighting

Testimonials

See what people have been saying about Hubbell Lighting.

"The new lighting has created an environment that will inspire the clients who visit our showroom, allow our employees to be more productive and improve our bottom line. We operate in a competitive marketplace, and I believe hosting an exceptional experience for customers in our showroom provides us with a competitive advantage."

David Epstein
President, Southern Components, Inc.

"The team at LP LED partnered with us to develop a [Hubbell Lighting based] lighting solution that accomplished our expectations and requirements for the LEED Certification v.4. They identified products that were ideal for the applications, met the targeted specs and ensured that customers and employees in the store would enjoy a safe, comfortable shopping experience."

Juan Carlos Gonzales
Project Manager, Makro

"The attributes of Prescolite's A2LED and D2LED presented the team with options that other products at the time were not able to offer. The small apertures and degree of adjustability all worked in our favor to complement the complex geometries of the architecture while at the same time minimizing glare and delivering comfortable light levels throughout. The finished product is stunning."

Scott Baillie-Hinojosa
Tillotson Design

"It's been great to see the renewed energy on the manufacturing floor. Employees are positive, excited and emotionally enthusiastic because of the brighter environment. Management is thrilled with the impact the lighting has had on worker safety, the balance sheet and our broader sustainability goals."

Geof Knutsen
Maintenance & Facility Supervising Electrician, The Greenbrier Companies

"With the ArcheType X we have a LED luminaire that blends in perfectly with the aesthetics of the designed space, is more energy efficient than our legacy fixtures, has decreased our need for on-going maintenance and, most importantly, improved the quality of light in the space for our members and staff. We've got the best, most efficient lighting where we need it, when we need it."

Jason Sentes
CEO, 1st Choice Savings & Credit Union

"The lighting solution had to meet the community requirements for design aesthetics and accommodate the preferences of neighbors on the residential border. The performance of the KicK was a key component to Kiddie Academy securing zoning approval, specifically due to its high marks for backlight, uplight, glare performance and stylish design. The overall outcome has been a tremendous success."

Eugene Thompson
Founder and President, Ionic DeZign Studio

Industry Leading Product Lines

The product lines we offer our customers reflect the value, integrity and quality of our business. Hubbell Lighting encompasses the most prestigious portfolio of brand names in the lighting industry with leading positions in architectural, commercial and industrial markets.

architectural area lighting
Architectural outdoor lighting including decorative site and area lighting, floodlights, step lights, wall sconces, bollards and poles in both period and contemporary designs.

HUBBELL® Outdoor Lighting
Full line of area, wall mount, overhead ceiling and floodlight commercial luminaires for perimeter, facade, roadway and security lighting applications serving the commercial market.

BEACON design · performance · technology
Energy efficient LED decorative commercial outdoor lighting, decorative poles, arms, post-top and site furnishings.

KIM LIGHTING
High performance outdoor architectural roadway, pedestrian, low-level, building mounted and landscape luminaires and poles.

Columbia LIGHTING
Commercial and industrial parabolic troffers, lensed troffers, recessed/indirects, industrials, strips, wraps, linear high bays and Chicago Plenum options.

kurt versen
Architectural lighting solutions characterized by visual aesthetics, photometric performance and mechanical design.

COMPASS®
Commercial and light industrial life safety products including emergency lighting units, exit signs, remote lighting heads and combination emergency lighting.

LITECONTROL making light work™
Linear architectural pendant, surface, wall mounted, perimeter and recessed lighting luminaires for commercial and institutional buildings.

DUAL LITE®
Broad life safety product offering includes emergency units, LED battery packs, exit signs, inverters and Chicago approved options.

prescolite
Full line of recessed downlights, track lighting, surface and pendant mounted lighting equipment for residential, commercial, architectural and institutional applications.

HUBBELL® Control Solutions
Distributed and centralized, wired and wireless systems, luminaire integrated sensors, color tuning controls, panels, occupancy sensors, photocell sensors, and emergency relays.

Innovative Product Leadership

Hubbell Lighting's market-driven strategies and customer centric approach result in our leading edge lighting and control solutions. Our vertically integrated process starts with extensive research and development and innovative engineering design. A focus on operational excellence and quality control assuring the highest quality, value and performance.

Product Development

Focused end-to-end solutions starting with technical innovation through R&D, engineering design and operational excellence resulting in the most reliable and industry leading performance.





Award Winning Products

The fast-evolving technology landscape is fundamentally changing the lighting marketplace. Hubbell Lighting's investment in solid-state lighting luminaires and controls is helping to create the next generation of innovative new products. The benefit of our technical expertise is seen through our award-winning portfolio of products that help your customers save money, reduce maintenance costs and improve our environment.

EC&M Product of the Year 2019 Category Winner

Best of the Best 2017 Annual Marketing Competition

30 Under 35 — Rising Stars of the Electrical Industry

2018 Plant Engineering Product of the Year Silver Award

2018 Plant Engineering Product of the Year Bronze Award

Buildings Money-Saving Products Winner

School Planning & Management | College Planning & Management — New Product Award 2017

15th hospitality design awards Finalist

Architectural Products Magazine's PIA'18 product innovation awards

Top Work Places 2019 — Charleston, Columbia, Greenville

Consulting-Specifying engineer 2017 Product of the Year Silver

TED magazine

Architectural Products 2018 Winner

pia 17 Award Winner

LEDs Magazine Sapphire Awards 2017 Winner

LEDs Magazine Sapphire Awards 2019 Winner

Ease of Doing Business

Hubbell Lighting's service commitments, online tools, best-in-class customer support and easy-to-do-business terms and conditions are all designed to keep you focused on growing your business.

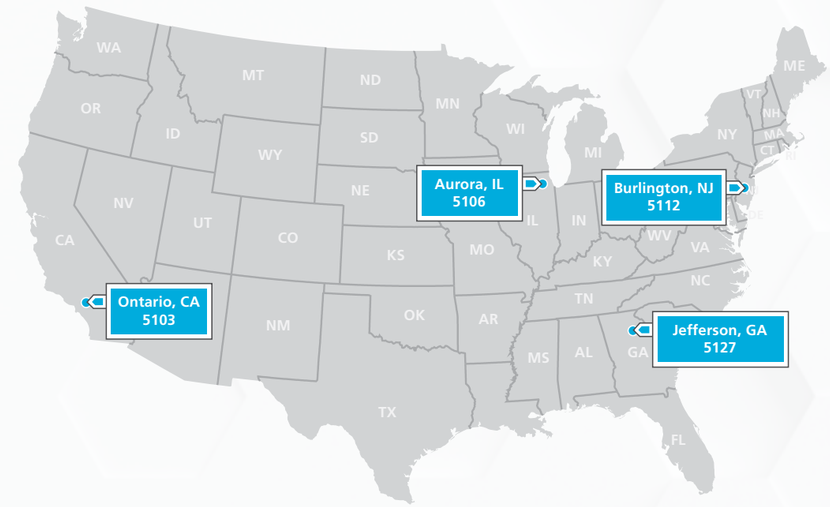

Local Distribution STOCK

Strategically placed **Regional Distribution Centers (RDC)** are stocked with inventory customized to meet each local market's unique needs. Real time inventory status is available online at HubbellLighting.com.

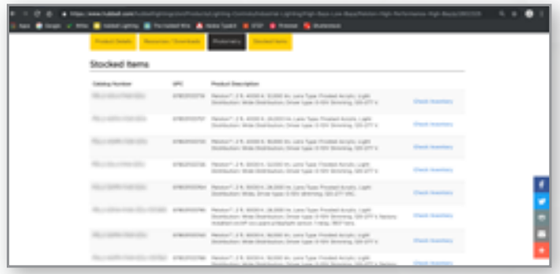

Quick-Ship QS5 QS10

For made-to-order products with abbreviated lead times, our **Quick-Ship** programs feature a collection of products available in as little as five days. For the full offering of Quick-Ship products please visit HubbellLighting.com and look for Quick-Ship under Resources.

Trusted Certifications

Our partnerships with ENERGY STAR® and The DesignLights Consortium® (DLC) assure our products are designated to meet and exceed industry specifications.

ENERGY STAR

DLC QPL LISTED

DLC QPL LISTED PREMIUM

Tools for Growth

Hubbell Lighting equips you with tools to strengthen your business and promote success. From application design software to financing, Hubbell Lighting is focused on delivering the support you need.

From lighting layouts to BIM drawings, we are the lighting design experts. **LitePro DLX** application design software allows you to create design proposals in a flexible, comprehensive and visually stunning fashion. To get started, look for LitePro DLX Design Software under Resources at HubbellLighting.com.

Digital photograph of finished space

Rendering from LitePro DLX 3D of finished space

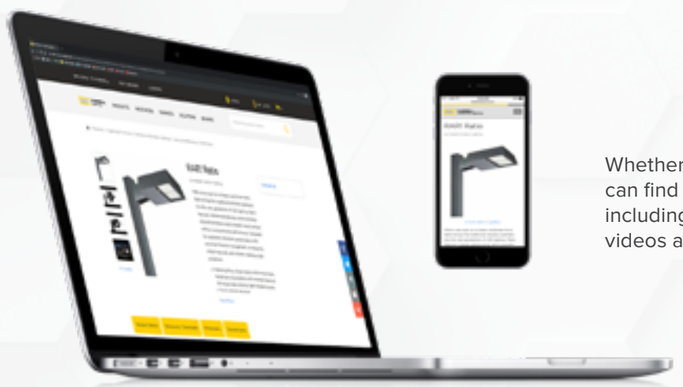

Whether you're on the road or at the computer, you can find the latest Hubbell Lighting product information including specification sheets, photometry, brochures and videos at HubbellLighting.com.

$REBATE SEARCH

Get access to the latest data from over 3,000 utility programs across North America. Using products that are DesignLights Consortium® Qualified Product Listing can save money. This tool makes it easy to find incentives offered by some utilities for using these products - doing the work for you! Find thousands of real-time rebates of DLC® qualified Hubbell Lighting products.

createchange®

create change® is a comprehensive collection of resources, tools and product solutions designed to help you maximize energy savings while improving the quality of lighting. Whether you are completing a retrofit and upgrading inefficient lighting systems or starting from the beginning, Hubbell Lighting's financing and createchange resources help remove the barriers to finding the full solution for your space.

CF+ CASH FLOW POSITIVE

Taking advantage of the money-saving opportunities of a lighting retrofit has never been easier with the Cash Flow Positive program from Hubbell Lighting. With a simple one-page approval process, Hubbell Lighting can fund your entire lighting upgrade including labor, while in many cases still providing a positive cash flow from day one!

Compare IN THE AIR

Are you ready to create**change**®?

Hubbell Lighting's Compare in the Air program can allow you to see results of a lighting retrofit or renovation real-time in your facility with no risk!

Grounded in serving our customers' needs, Hubbell Lighting understands there's no one size fits all solution, especially for unique applications, offering lighting and control solutions that span the full spectrum for new construction and retrofit projects.

4 EASY STEPS

STEP 1 - SELECT QUALIFIED PRODUCT(S) FOR TRIAL
STEP 2 - ORDER UP TO 4 FIXTURES AND MARK ORDER "COMPARE IN THE AIR"[1]
STEP 3 - RECEIVE A 90-DAY DATING TERMS ON YOUR ORDER
STEP 4 - INSTALL THE PRODUCTS AND SEE THE RESULTS[2,3]

Contact your local Hubbell Lighting sales representative today to get started!

1 Maximum order quantity of 4 units total. Order can consist of more than one product type.
2 Installation charges are the responsibility of the customer.
3 Freight charges for product(s) are the responsibility of the customer.

LIGHTING
Solutions Center

Hubbell Lighting offers an unprecedented opportunity to gain cutting-edge lighting education in an environment that brings today's most relevant lighting solutions to life. Our 25,000-square-foot Lighting Solutions Center, located at our Greenville, SC headquarters, is engineered to present a total solutions approach to current lighting challenges and will evolve to meet future lighting challenges head on.

SpectraClean™

What if you could utilize lighting to effectively and continuously disinfect your environment? Hubbell Lighting's SpectraClean™ luminaires provide continuous environmental disinfection as part of the lighting system. It automatically treats harmful microorganisms suspended in air, trapped on objects and residing on surfaces.

Contents

Columbia Lighting
Ambient Indoor

RECESSED LINEAR TROFFERS & PANELS
LCAT – LED Contemporary Architectural Troffer* 15
CFP – Edge-Lit Flat Panel* 16
TCAT – LED Twin Contemporary Architectural Luminaire* 17
CBT – Back-Lit Troffer* 17
CCL – Center Lens Troffer* 18
LTRE – Transition® Enclosed LED Deep Architectural Center Lens* 18
LSER – Serrano® LED Architectural Luminaire* 18
RLA – Recessed LED Architectural* 19
LJT – LED Troffer* 19
P4D – High Performance Parabolic 20
JT8 – Lensed Troffer 20

WRAPAROUNDS
RLW - Revalume™ Linear Wrap* 21
CRW – Round Wrap* 21
CNW – Narrow Wrap* 21
CWP – Wrap Luminaire* 22
LAW – Low Profile LED Wraparound* 22
AW – Commercial Wrap 22

LINEAR LIGHTING/WALL MOUNT
MPS – MultiPurpose Linear* 23
ESL – Escalate™ Stairwell Luminaire* 24

STRIPS
CSL – LED Striplight* 24
CS – Commercial Striplight 24

SURFACE LINEAR
CUC – Undercabinet Light 25

BAY LIGHTING
CHB – Linear High Bay* 25
PEL – Peloton™ High Performance High Bay* 26
HBL – LED High Bay Series 27
CRN – Wet Location High Bay* 28

ENCLOSED & GASKETED
LXEN – Narrow LED Enclosed and Gasketed Luminaire* 28
LXEM – LED Enclosed and Gasketed Luminaire* 29
CVT — Linear Vaportite* 29

LIGHTING RETROFIT KITS
CTK – LED Troffer Retrofit Kit* 30
GORK - LED Prismatic Troffer Retrofit Kit* 30
LSRK – Linear Strip Retrofit Kit* 31

ACCESSORIES
Columbia Lighting Accessories 32

Prescolite
Downlights, Pendants, & Track

ARCHITECTURAL
LITEISTRY™ 3" LED Round Housings and Trims 35
LITEISTRY™ 3" LED Square Housings and Trims 35
LITEISTRY™ 4" LED Round Housings and Trims 36
LITEISTRY™ 4" LED Square Housings and Trims 37
LITEISTRY™ 6" LED Round Housings and Trims 38
LITEISTRY™ 6" LED Square Housings and Trims 39
D2 Series 2" LED Downlights and Accessories 40

COMMERCIAL
LiteFrame® Commercial LED 4" Housings and Trims 41
LiteFrame® Commercial LED 6" Housings and Trims 42
LiteFrame® Commercial LED 6" Cylinders 43
Retroficient LiteFrame Commercial LED 6" Housings and Trims 44
Housing Accessories 44

LIGHT COMMERCIAL
LiteBox® Plus 6" LED Housings and Trims 45
LiteBox® 6" LED Housings and Trims 45
LiteBox® 6" LED Retrofit Trims 46
LiteBox® 6" LED Surface Downlights 46
LiteBox® 6" LED Cylinder 47
LiteBox® 4" LED QuickLink Housings 47
LiteBox® 4" LED Retrofit Trims 48
CDL- 4", 5" or 6" LED Retrofit Trims 48

TRACK
Architrak® Track System 49
ArchiTrak® 4" LED Track Head 49
LiteStep® LED Step Lights 49

*DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org.

Hubbell Control Solutions
Lighting Controls

CX Lighting Control Panels 51
Daylight Harvesting Controls 51
Emergency Lighting Units 52
NX Distributed Intelligence™ Lighting Controls 52
Cables 54

OCCUPANCY VACANCY SENSORS
OMNI® Low Voltage Dual Technology Occupancy/Vacancy Ceiling Sensors 54
Low Profile Passive Infrared Ceiling Sensor 55
WASP Fixture Sensor 55
LightHAWK® Wall Switch Sensors 56
LightOWL® Dual Technology Ultrasonic and PIR 58
Power Packs and Controlled Relays 58
Wallbox Devices 59
wiSCAPE® Lighting Controls 60

Hubbell Outdoor Lighting
Outdoor

AREA, SITE & ROADWAY
RATIO - RAR1 63
RATIO - RAR2 63
Airo LED Area/Site* 63
Airo LED and 4" Square Straight Steel 64
Pronto Combo (Single)* 64
Airo LED and 4" Square Straight Steel Pronto Combo (Double)* 64
DDL Patrolman 65
SGD Sling 65

FLOOD LIGHTING
ALF Series 66
Mini Colt 66
Colt LBUL 67
Colt 67
RATIO - RFL2/RFL3 68
RATIO - RFL4/RFL5 69
Factor Floods 70
Factor - Large 70

WALLPACKS
LNC LitePak 71
LNC Litepak LED Wallpacks 71
LNC2 LitePak 72
LNC3 Litepak LED Wallpacks* 73
LNC4 LitePak 73
SG Sling Series 74

CEILING, CANOPY & GARAGE
SGC Sling 75
NRG® 4000 LED Lumasquare® Series 75
Vaportite® V Series 76

VAPORTITES
Vaportites VBGL/ VWGL 76
Marshal 77

SECURITY
NRG 300L 77
PRS Perimashield 78
Perimaliter® 78
WGH Switchable Glass Refractor Wallpack 79
WGH Glass Refractor Wallpack Series 79

BOLLARDS
Fresno Square or Round Bollard 80

POLES & ACCESSORIES
Poles 80
Pole Accessories 81
Options and Accessories 82
Photocontrol 82

SPORTS LIGHTING
Sportsliter Series Luminaire 83
Sportslighting Mounting Accessories 83

*DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org.

Contents (continued)

Kim Lighting
Architectural Outdoor

AREA/SITE
ARX09 - ArcheType® X Site/Area 85
ARX16 - ArcheType® X Site/Area 85
WARP9® LED with PicoPrism® 86
WARP9® LED with PicoEmitter® 86
The Archetype® LED with PicoEmitter® 86
KRS - Round Steel Poles, 4" (Non Tapered) 87

LANDSCAPE
Micro Flood® 88
Ravenna Highlighter 88
Ravenna Lowlighter 88
Round Hood 89
Scarab Series 89
Square Hood 89
Traditional 90

IN-GRADE
Well Light 90

ACCESSORIES
12V/120V Landscape Accessories 91

Architectural Area Lighting
Architectural Outdoor

DECORATIVE
PROV/PROL - Providence® Medium/Large Housing Scale 92
UCM/UCL - Universe® Medium/Large Housing Scale 92
K4 - KicK™ Small Housing Scale 93

Beacon Products
Architectural Outdoor

SITE/ROADWAY
Large Viper LED Luminaire 95
Viper Small 95

Dual-Lite
Life Safety

EMERGENCY LIGHTING
PG Series 97
EVHC Series 97
EV Series 98
EV4D-02WAL Series 98
EV4R Series 99
EZ-2 Series 99
LZ Series 99
LM Series 100
Dynamo DYN Series 101
EVS Series 102

INVERTERS
LiteGear® Series 103
LightPower™ LPS Series 104
Synchron DLS Series 105

BATTERY PACKS
UFO Battery Packs 105
UFO Series 106
Lampak Battery Packs 106

ACCESSORIES
Lampak Remote Test Switch 106
ATSD/ALCR Series 107
ELCR Series 107
PowerLED PLD Series 107

EXIT SIGNS
EVC Series 108
EVE Series 108
EVE4X Series 109
LT Series 109
SE Series 110
DPL Series 111
SEWL Series 112
CLSC Series 113
CLS Series 113
Obsidian™ 114
HCX Series 115
CCEL Series 115
LE Series 116
LES Series 116

*DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org.

Dual-Lite (continued)
Life Safety

EMERGENCY LIGHTING
CCU2 117
CRU 117
EVR Series 117
EVHCR Series 117
EVO Series 118
CPR 118
Dynamo Remote Series 118
CRH 119
OCR Series 119
OMS 119

REPLACEMENT BATTERIES
Replacement Battery 120
Dual-Lite Accessories 121

Compass
Life Safety

EXIT SIGNS
CE/CA Series 123
CC Series 124
CCSQ Series 124
CCE Series 125
CWC Series 125
CEL Series 126
CSR 126
CEW Series 127
RME Series 127
CS Series 127
CELC Series 128

EMERGENCY LIGHTING
CELEM Series 128
CPL25 Series 128
CU2HL Series 129
CUSO Series 129
CU2 Series 130
CU2SQ Series 130
CU2SO Series 130
CSWEU2LED 130
CUW Series 131
CU2W Series 131
CWR Series 131
CIR Series 131
COR Series 131

Index 132

*DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org.

Columbia LIGHTING

LCAT – LED Contemporary Architectural Troffer*

LED Contemporary Architectural Troffer provides both design and value with an architectural appearance for classrooms, offices, retail and health care applications.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet	DLC QPL
93079645	LCAT14-40MLG-EDU	78531128944	LED, 2'x2', 80 CRI, 4000K, 3473 LMS, Recessed, Curved Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 29W, 121 LPW, White		●	●		15	20	
93077470	LCAT22-35LWG-EDU	78531125905	LED, 2'x2', 80 CRI, 3500K, 2770 LMS, Recessed, Curved Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 23W, 123 LPW, White	●	●	●	●	15	40	●
93077465	LCAT22-35MLG-EDU	78531125929	LED, 2'x2', 80 CRI, 3500K, 3420 LMS, Recessed, Curved Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 29W, 119 LPW, White	●	●	●	●	15	40	●
93077472	LCAT22-35MLG-EDU-CP	78531126988	LED, 2'x4', 80 CRI, 4000K, 4990 LMS, Recessed, Curved Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 39W, 129 LPW, White			●		20	20	●
93077469	LCAT22-40LWG-EDU	78531125912	LED, 2'x2', 80 CRI, 4000K, 2813 LMS, Recessed, Curved Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 23W, 124 LPW, White	●	●			15	40	●
93103021	LCAT22-40LWG-EDU-CP	78531139674	LED, 2'x2', 80 CRI, 4000K, 3473 LMS, Recessed, Curved Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 29W, 121 LPW, White			●		15	40	
93077467	LCAT22-40MLG-EDU	78531125936	LED, 2'x2', 80 CRI, 4000K, 3473 LMS, Recessed, Curved Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 29W, 121 LPW, White	●	●	●	●	15	40	●
93103022	LCAT22-40MLG-EDU-CP	78531139681	LED, 2'x2', 80 CRI, 4000K, 3473 LMS, Recessed, Curved Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 29W, 121 LPW, White			●		15	40	
93071945	LCAT22-40VLG-EDU	78531126728	LED, 2'x2', 80 CRI, 4000K, Curved Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V	●	●		●	15	40	
93077466	LCAT24-35LWG-EDU	78531125868	LED, 2'x4', 80 CRI, 3500K, 4396 LMS, Recessed, Curved Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 36W, 122 LPW, White	●	●	●	●	20	20	●
93103023	LCAT24-35LWG-EDU-CP	78531139698	LED, 2'x2', 80 CRI, 4000K, 3473 LMS, Recessed, Curved Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 29W, 121 LPW, White			●		20	20	
93077464	LCAT24-35MLG-EDU	78531125882	LED, 2'x4', 80 CRI, 3500K, 4914 LMS, Recessed, Curved Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 39W, 127 LPW, White	●	●	●	●	20	20	●
93077471	LCAT24-35MLG-EDU-CP	78531126995	LED, 2'x4', 80 CRI, 3500K, Curved Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V			●		20	20	
93077468	LCAT24-40LWG-EDU	78531125875	LED, 2'x4', 80 CRI, 4000K, 4465 LMS, Recessed, Curved Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 36W, 124 LPW, White	●	●	●	●	20	20	●
93077463	LCAT24-40MLG-EDU	78531125899	LED, 2'x4', 80 CRI, 4000K, 4990 LMS, Recessed, Curved Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 39W, 129 LPW, White	●	●	●	●	20	20	●
93103025	LCAT24-40MLG-EDU-CP	78531139711	LED, 2'x2', 80 CRI, 4000K, 3473 LMS, Recessed, Curved Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 29W, 121 LPW, White			●		20	20	

QS 10 — 10-Day Quick Ship Ordering Guide

Order Limit Per Fixture Selection: 250

LCAT	[ ]	-	[ ]	[ ]	- G	[ ]	U	-	[ ]
MODEL	SIZE		COLOR TEMP	LUMEN OUTPUT	CEILING TYPE	DRIVER	VOLTAGE		OPTIONS

MODEL
- **LCAT** LED Contemporary Architectural Troffer

SIZE
- **22** 2' × 2'
- **24** 2' × 4'

COLOR TEMP
- **35** 3500K
- **40** 4000K

LUMEN OUTPUT
- **LW** Low Watt
- **ML** Medium Lumen
- **HL** High Lumen
- **VL** Very High Lumen

CEILING TYPE
- **G** Grid Lay-in[1]

DRIVER
- **E** Fixed Output
- **ED** 0-10V Dimming
- **ED1** 0-10V 1% Dimming

VOLTAGE
- **U** 120V-277V

OPTIONS
- **ELL14** Emergency Battery Pack Installed, 1400 Lumen[2]
- **C388** 3-Wire Flex
- **C488** 4-Wire Flex
- **C588** 5-Wire Flex

[1] For drywall, order G with Flange Kit Accessory.
[2] For compatibility with Dual-Lite LiteGear® inverters in lieu of installed Battery Pack, contact Hubbell Lighting Representative.

*DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org.

CFP – Edge-Lit Flat Panel*

The CFP offers edge-lit LED technology in a sleek flat panel design. Available with Switchable Lumen technology and recessed or surface mounting.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet	DLC QPL
93114030	CFP14-55/41/3435	78531140953	LED, 1'x4', 80 CRI, 3500K, 5500/4100/3400 Switchable LMS, Recessed, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V	●	●	●	●		28	●
93114031	CFP14-55/41/3440	78531140960	LED, 1'x4', 80 CRI, 4000K, 5500/4100/3400 Switchable LMS, Recessed, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V	●	●	●	●		28	●
93114403	CFP22-3335-HE	78531140571	LED, 2'x2', 80 CRI, 3500K, 3300 LMS, Recessed, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V	●			●		56	●
93114405	CFP22-3340-HE	78531140595	LED, 2'x2', 80 CRI, 4000K, 3300 LMS, Recessed, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V	●			●		56	●
93114032	CFP22-40/33/2835	78531140977	LED, 2'x2', 80 CRI, 3500K, 4000/3300/2800 Switchable LMS, Recessed, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V	●	●	●	●		56	●
93114033	CFP22-40/33/2840	78531140984	LED, 2'x2', 80 CRI, 4000K, 4000/3300/2800 Switchable LMS, Recessed, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V	●	●	●	●		56	●
93114409	CFP24-4135-HE	78531140632	LED, 2'x4', 80 CRI, 3500K, 4100 LMS, Recessed, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 40W	●			●		28	●
93114411	CFP24-4140-HE	78531140656	LED, 2'x4', 80 CRI, 4000K, 4100 LMS, Recessed, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 40W	●			●		28	●
93114034	CFP24-55/41/3435	78531140991	LED, 2'x4', 80 CRI, 3500K, 5500/4100/3400 Switchable LMS, Recessed, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V	●	●	●	●		28	●
93114035	CFP24-55/41/3440	78531141004	LED, 2'x4', 80 CRI, 4000K, 5500/4100/3400 Switchable LMS, Recessed, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V	●	●	●	●		28	●
93114414	CFP24-7535	78531140687	LED, 2'x4', 80 CRI, 3500K, 7500 LMS, Recessed, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V	●					28	●
93114415	CFP24-7540	78531140694	LED, 2'x4', 80 CRI, 4000K, 7500 LMS, Recessed, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V	●					28	●
93094847	SRPSMK-14	78531133283	Surface Mount Kit, 1'x4'	●				1.7	–	
93094848	SRPSMK-22	78531133290	Surface Mount Kit, 2'x2'	●				1.4	–	
93094849	SRPSMK-24	78531133306	Surface Mount Kit, 2'x4'	●				2	–	
93093113	CFPCM36Y SC5F-KIT	78531133023	Cable Mount Kit, 36", 5 Wire		●			1	–	

10-Day Quick Ship Ordering Guide
Order Limit Per Fixture Selection: 100

Add **ELL14** (Emergency Battery Pack Installed, 1400 Lumens) or **C588** (5-wire Flex) to any stocked option.
Examples: **CFP14-55/41/3435-ELL14; CFP14-55/41/3435-C588**

*DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org.

TCAT – LED Twin Contemporary Architectural Luminaire*

TCAT Twin Contemporary Architectural Luminaire provides both design and value with an architectural appearance for classrooms, offices, retail and health care applications.

10-Day Quick Ship Ordering Guide
Order Limit Per Fixture Selection: 100

TCAT		-			G	-		U	-	
MODEL	SIZE	COLOR TEMP	LUMEN OUTPUT	CEILING TYPE	DRIVER	VOLTAGE	OPTIONS

MODEL
- **TCAT** LED Twin Contemporary Architectural Troffer

SIZE
- **22** 2' × 2'
- **24** 2' × 4'

COLOR TEMP
- **35** 3500K
- **40** 4000K

LUMEN OUTPUT
- **MW** Medium Low Watt
- **LW** Low Watt
- **ML** Medium Lumen
- **HL** High Lumen

CEILING TYPE
- **G** Grid Lay-in[1]

DRIVER
- **E** Fixed Output
- **ED** 0-10V Dimming
- **ED1** 0-10V 1% Dimming

VOLTAGE
- **U** 120V - 277V

OPTIONS
- **ELL14** Emergency Battery Pack Installed, 1400 Lumens[2,3]
- **C388** 3-Wire Flex
- **C488** 4-Wire Flex
- **C588** 5-Wire Flex

[1] For drywall, order G with Flange Kit Accessory
[2] Not available in 347V
[3] For compatability with Dual-Lite LiteGear® inverters, contact Hubbell Lighting Representative

CBT – Back-Lit Troffer*

Affordable LED lensed troffer with smooth even illumination. Shallow height is ideal for tight plenum applications. Available with Switchable Lumen technology and recessed or surface mounting.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet	DLC QPL
93123033	CBT14-LS35	840141400013	1x4 Back-Lit Troffer, 4400/3300/2750 Switchable Lumens, 3500K	●	●	●		4.6	28	●
93123034	CBT14-LS40	840141400020	1x4 Back-Lit Troffer, 4400/3300/2750 Switchable Lumens, 4000K	●	●	●		4.6	28	●
93123035	CBT22-LS35	840141400037	2x2 Back-Lit Troffer, 4400/3300/2750 Switchable Lumens, 3500K	●	●	●		4.4	56	●
93123036	CBT22-LS40	840141400044	2x2 Back-Lit Troffer, 4400/3300/2750 Switchable Lumens, 4000K	●	●	●		4.4	56	●
93123037	CBT24-LS35	840141400051	2x4 Back-Lit Troffer, 5500/4400/3300 Switchable Lumens, 3500K	●	●	●		8.8	28	●
93123038	CBT24-LS40	840141400068	2x4 Back-Lit Troffer, 5500/4400/3300 Switchable Lumens, 4000K	●	●	●		8.8	28	●
93123039	CBTSMK14	840141400075	1x4 CBT Surface Mount Kit	●	●	●			–	
93123040	CBTSMK22	840141400082	2x2 CBT Surface Mount Kit	●	●	●			–	
93123041	CBTMK24	840141400099	2x4 CBT Surface Mount Kit	●	●	●			–	

*DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org.

CCL – Center Lens Troffer*

Center Lens Troffer provides both design and value with an architectural appearance.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet	DLC QPL
93077477	CCL22-3335	78531127503	LED, 2'x2', 80 CRI, 3500K, 3223 LMS, Recessed, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 29W, 112 LPW, White		●	●	●	15	40	●
93077478	CCL22-3340	78531127510	LED, 2'x2', 80 CRI, 4000K, 3345 LMS, Recessed, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 29W, 116 LPW, White	●	●	●	●	15	40	●
93077479	CCL24-5035	78531127527	LED, 2'x4', 80 CRI, 3500K, 5001 LMS, Recessed, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 44W, 114 LPW, White	●	●	●	●	20	20	●
93077480	CCL24-5040	78531127534	LED, 2'x4', 80 CRI, 4000K, 5191 LMS, Recessed, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 44W, 118 LPW, White	●	●	●	●	20	20	●

LTRE – Transition® Enclosed LED Deep Architectural Center Lens*

LTRE is designed for the health of your occupants, the quality of your installation, the flexibility of your needs, and the beauty of your design. Full distribution light output assures comfortable, effective lighting.

10-Day Quick Ship Ordering Guide
Order Limit Per Fixture Selection: 100

LTRE [ ] - [ ] [ ] G - RFA - [ ] U - [ ]

MODEL
- **LTRE** Transition® Enclosed LED Deep Architectural Center Lens

SIZE
- **22** 2' × 2'
- **24** 2' × 4'

COLOR TEMP
- **35** 3500K
- **40** 4000K

LUMEN OUTPUT
- **LW** Low Watt (2x4 only)
- **ML** Medium Lumen
- **HL** High Lumen (2x2 only)
- **VL** Very High Lumen (2x2 only)

CEILING TYPE
- **G** Grid Lay-in[1]

SHIELDING
- **RFA** Ribbed Frosted Acrylic

DRIVER
- **E** Fixed Output
- **ED** 0-10V Dimming

VOLTAGE
- **U** 120V-277V

OPTIONS
- **C388** 3-Wire Flex
- **C488** 4-Wire Flex
- **C588** 5-Wire Flex
- **ELL14** Emergency Battery Pack, 1400 Lumen[2]

[1] For drywall, order G with Flange Kit Accessory.
[2] For compatibility with Dual-Lite LiteGear® inverters in lieu of installed Battery Pack, contact Hubbell Lighting Representative.

LSER – Serrano® LED Architectural Luminaire*

Perfect for relight, retrofit or new construction, Serrano LED delivers a powerful combination of performance and energy savings. Superior color consistency and serviceability put the finishing touches on this versatile luminaire.

10-Day Quick Ship Ordering Guide
Order Limit Per Fixture Selection: 100

LSER [ ] - [ ] [ ] G - [ ] - [ ] U - [ ]

MODEL
- **LSER** Serrano® LED Architectural Luminaire

SIZE
- **22** 2' × 2'
- **24** 2' × 4'

COLOR TEMP
- **35** 3500K
- **40** 4000K

LUMEN OUTPUT
- **LW** Low Watt
- **ML** Medium Lumen
- **HL** High Lumen
- **VL** Very High Lumen

CEILING TYPE
- **G** Grid[1]

SHIELDING
- **C** Contour

DRIVER
- **E** Fixed Output
- **ED** 0-10V Dimming

VOLTAGE
- **U** 120V-277V

OPTIONS
- **C388** 3-Wire Flex
- **C488** 4-Wire Flex
- **C588** 5-Wire Flex
- **ELL14** Emergency Battery Pack, 1400 Lumen[2]

[1] For drywall, order G with Flange Kit Accessory.
[2] For compatibility with Dual-Lite LiteGear® inverters in lieu of installed Battery Pack, contact Hubbell Lighting Representative.

*DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org.

RLA – Recessed LED Architectural*

RLA provides a luminaire that is price competitive and provides an architectural design without forfeit.

10-Day Quick Ship Ordering Guide
Order Limit Per Fixture Selection: 100

RLA [ ] - [ ] [ ] - G [ ] [ ] U - [ ]

MODEL
- **RLA** Recessed LED Architectural Luminaire

SIZE
- **22** 2' × 2'
- **24** 2' × 4'

COLOR TEMP
- **35** 3500K
- **40** 4000K

LUMEN OUTPUT
- **LW** Low Watt
- **ML** Medium Lumen
- **HL** High Lumen
- **VL** Very High Lumen

CEILING TYPE
- **G** Grid[1]

DRIVER
- **E** Fixed Output
- **ED** 0-10V Dimming
- **ED1** 0-10V 1% Dimming

VOLTAGE
- **U** 120V-277V

OPTIONS
- **C388** 3-Wire Flex
- **C488** 4-Wire Flex
- **C588** 5-Wire Flex
- **ELL14** Emergency Battery Pack Installed, 1400 Lumen[2]

[1] For drywall, order G with Flange Kit Accessory.
[2] For compatibility with Dual-Lite LiteGear® inverters in lieu of installed Battery Pack, contact Hubbell Lighting Representative.

LJT – LED Troffer*

A direct replacement for fluorescent with all the right options for versatility of use across a wide range of project types.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet	DLC QPL
93077455	LJT22-40HLG-FSA12-EDU	78531123185	LED, 2'x2', 80 CRI, 4000K, 3743 LMS, Recessed, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 33W, 114 LPW, White		●	●	●	10	36	●
93077454	LJT24-35MLG-FSA12-EDU	78531121235	LED, 2'x4', 80 CRI, 3500K, 4718 LMS, Recessed, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 33W, 123 LPW, White		●	●	●	20	26	●
93077453	LJT24-40MLG-FSA12-EDU	78531123192	LED, 2'x4', 80 CRI, 4000K, 4792 LMS, Recessed, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 38W, 125 LPW, White	●	●	●	●	20	26	●

10-Day Quick-Ship Ordering Guide
Order Limit Per Luminaire Selection: 100

LJT [ ] [ ] - [ ] G - FS A12 - [ ] U - [ ]

MODEL
- **LJT** LED Lensed Troffer

SIZE
- **22** 2' × 2'
- **24** 2' × 4'

COLOR TEMP
- **35** 3500K
- **40** 4000K

LUMEN OUTPUT
- **LW** Low Watt (2x4 only)
- **ML** Medium Lumen
- **HL** High Lumen
- **VL** Very High Lumen

CEILING TYPE
- **G** Grid[1]

DOOR
- **FS** White Flush Steel

SHIELDING
- **A12** Pattern 12 Acrylic Lens

DRIVER
- **E** Fixed Output
- **ED** 0-10V Dimming
- **ED1** 0-10V 1% Dimming[2]

VOLTAGE
- **U** 120V-277V

OPTIONS
- **C388** 3-Wire Flex
- **C588** 5-Wire Flex
- **ELL14** Emergency Battery Pack Installed, 1400 Lumen[2]
- **CP** Chicago Plenum

[1] For hard ceilings use flange kit accessory.
[2] For compatibility with Dual-Lite LiteGear® inverters in lieu of EL Battery Pack, contact Hubbell Lighting Representative.

*DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org.



P4D – High Performance Parabolic

The P4D parabolic fluorescent low-profile fixture provides versatility.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet
P4D019047.16PK1	LVR-P4D24 3X6 MA HK BAG	78531044985	Parabolic Louver, 2'x4'				●	10	
P4D00120	P4D22-232U6G-MA33-S-EU	78531043445	Fluorescent, Designed for 2-2' T8 Lamps, Recessed, 9 Cell MA Louver, 120-277V T8 Electric Ballast		●		●	32	28
P4D00146	P4D24-332G-MA36-S-3EU	78531043483	Fluorescent, Designed for 3-4' T8 Lamps, Recessed, 18 Cell MA Louver, 120-277V T8 Electric Ballast		●	●	●	33	16

JT8 – Lensed Troffer

The JT8 lensed troffer offers a standard flush steel door that can be hinged from either side.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet
JT441119H000000	JT824-432G-FSA12-4EU	78531005641	Fluorescent, 2'x4', Designed for 4-4' T8 Lamps, Recessed, Prismatic Acrylic Lens, 120-277V T8 Electric Ballast, White	●	●	●	●	18	26
JT243119FTP0000	JT822-232U6G-FSA12-EU	78531005603	Fluorescent, 2'x2', Designed for 2-2' T8 Lamps, Recessed, Prismatic Acrylic Lens, 120-277V T8 Electric Ballast, White	●	●	●	●	16	36
JT241119F000000	JT824-232G-FSA12-EU	78531005610	Fluorescent, 2'x4', Designed for 2-4' T8 Lamps, Recessed, Prismatic Acrylic Lens, 120-277V T8 Electric Ballast, White	●	●	●	●	20	26
JT341119G000000	JT824-332G-FSA12-3EU	78531005627	Fluorescent, 2'x4', Designed for 3-4' T8 Lamps, Recessed, Prismatic Acrylic Lens, 120-277V T8 Electric Ballast, White	●	●	●	●	20	26
003335.00	LENS-A12.095 22.500-46.562	78531004774	Acrylic Lens, 2'x4', Designed for 4-4' T8 Lamps			●	●	3	25

*DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org.

RLW - Revalume™ Linear Wrap*

Provides a sleek aesthetic contemporary style appearance while delivering advanced technology lighting solutions for a variety of applications.

QS 10 — 10-Day Quick Ship Ordering Guide
Order Limit Per Fixture Selection: 100

RLW [ ] - [ ] [ ] - FA W [ ] U - [ ]

MODEL
- **RLW** Revalume Linear Wrap

SIZE
- **4** 4'
- **8** 8'

COLOR TEMP
- **35** 3500K
- **40** 4000K

LUMEN OUTPUT[1]
- **VW** 4' (3400), 8' (6800)[2]
- **MW** 4' (3800), 8' (7700)[2]
- **LW** 4' (4200), 8' (8500)[2]
- **ML** 4' (5300), 8' (9800)[2]

SHIELDING
- **FA** Frosted Acrylic

DISTRIBUTION
- **W** Wide

DRIVER
- **E** Fixed Output
- **ED** 0-10V Dimming
- **ED1** 0-10V 1% Dimming

VOLTAGE
- **U** 120-277V

OPTIONS
- **ELL14** Emergency Battery Pack, 1400 Lumens[3]

[1] Nominal Lumens. Refer to specification sheet performance tables for exact values and available lumen outputs for fixture size
[2] RLW4' & RLW8' lumen packages XW - ML qualified up to 40°C
[3] For compatibility with Dual-Lite LiteGear® inverters in lieu of installed battery pack, contact Hubbell Lighting representative

CRW – Round Wrap*

The CRW is a versatile round wrap with decorative end caps. Featuring Switchable Lumen and CCT technology, a frosted acrylic lens and efficacy up to 153 lumens per watt.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet	DLC QPL
93123054	CRW4–LSCS	840141400228	4' LED Round Wrap with Switchable Lumen technology (3900/4800/5500 lumens) and Switchable CCT technology (3500/4000/5000K). Frosted acrylic lens and efficacy up to 153 lumens per watt.	●	●			6.83	30	●

CNW – Narrow Wrap*

An attractive narrow wrap with decorative end caps and a polished look, suitable for many applications. Features a frosted acrylic lens and efficacy up to 112 lumens per watt.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet	DLC QPL
93123055	CNW4–3540	840141400235	4' LED Narrow Wrap, 3500 Lumens, 4000K	●	●			4.08	64	●

*DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org.

CWP – Wrap Luminaire*

An efficient 4' LED wrap style fixture that provides an economical solution for exceptional light distribution in general areas.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet	DLC QPL
93075545	CWP4-4035	78531127480	LED, 4', 80 CRI, 3500K, 4584 LMS, Surface Mount or Pendant, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 37W, 124 LPW, White	●	●	●	●	10.8	33	●
93075546	CWP4-4040	78531127497	LED, 4', 80 CRI, 4000K, 4584 LMS, Surface Mount or Pendant, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 37W, 124 LPW, White	●		●	●	10.8	33	●

LAW – Low Profile LED Wraparound*

The LAW LED Low Profile Wrap is an excellent choice for hallways, closets, utility rooms, back-of-house locations and low ceiling areas.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet	DLC QPL
93088138	LAW4-35XW-EDU	78531132019	LED, 4', 80 CRI, 3500K, 2370 LMS, Surface Mount or Suspended, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 19W, 126 LPW, White					14	55	●
93088140	LAW4-40HL-EDU	78531125233	LED, 4', 80 CRI, 4000K, 5714 LMS, Surface Mount or Suspended, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 51W, 112 LPW, White	●		●		14	55	●

AW – Commercial Wrap

Low Profile Fluorescent Wrap

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet
CY241019F000000	AWN4-232-EU	78531004859	Fluorescent, 4', Designed for 2-4' T8 Lamps, Ceiling Mount or Suspended, Prismatic Acrylic Lens, 120-277V T8 Electric Ballast, White		●		●	14	55
CL441019H000000	AWW4-432-4EU	78531004873	Fluorescent, 4', Designed for 4-4' T8 Lamps, Ceiling Mount or Suspended, Prismatic Acrylic Lens, 120-277V T8 Electric Ballast, White		●	●	●	14	33

*DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org.

MPS – MultiPurpose Linear*

MultiPurpose Linear is a versatile linear solution that will fit seamlessly into countless applications. With continuous illumination, integrated controls, multiple lens options and single or row mounting, MultiPurpose Linear is adaptable to your environment.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet	DLC QPL
93098758	MPS4-35ML-CW-EDU	78531138714	LED, 4', 80 CRI, 3500K, 4556 LMS, Surface Mount, Wall Mount or Suspended, Frosted Acrylic Wide Distribution Lens, 0-10V Dimming Driver, 120-277V, 40W, 114 LPW, White	●	●	●	●	10	63	●
93098759	MPS4-40ML-CW-EDU	78531138721	LED, 4', 80 CRI, 4000K, 4614 LMS, Surface Mount, Wall Mount or Suspended, Frosted Acrylic Wide Distribution Lens, 0-10V Dimming Driver, 120-277V, 40W, 115 LPW, White	●	●	●	●	10	63	●
93098760	MPS4-50ML-CW-EDU	78531138738	LED, 4', 80 CRI, 5000K, 4766 LMS, Surface Mount, Wall Mount or Suspended, Frosted Acrylic Wide Distribution Lens, 0-10V Dimming Driver, 120-277V, 40W, 119 LPW, White		●	●	●	10	63	●
93098761	MPS8-40ML-CW-EDU	78531138745	LED, 8', 80 CRI, 4000K, 9227 LMS, Surface Mount, Wall Mount or Suspended, Frosted Acrylic Wide Distribution Lens, 0-10V Dimming Driver, 120-277V, 80W, 115 LPW, White	●	●	●	●	18	48	●
93098762	MPS8-50ML-CW-EDU	78531138752	LED, 8', 80 CRI, 5000K, 9532 LMS, Surface Mount, Wall Mount or Suspended, Frosted Acrylic Wide Distribution Lens, 0-10V Dimming Driver, 120-277V, 80W, 115 LPW, White	●	●	●	●	18	48	●
93104626	MPS4-40ML-NL-EDU	78531140229	LED, 4', 80 CRI, 4000K, 4794 LMS, Surface Mount, Wall Mount or Suspended, No Lens, 0-10V Dimming Driver, 120-277V, 40W, 120 LPW, White	●				10	63	●
93104627	MPS4-35ML-NL-EDU	78531140236	LED, 4', 80 CRI, 4000K, 4733 LMS, Surface Mount, Wall Mount or Suspended, No Lens, 0-10V Dimming Driver, 120-277V, 40W, 118 LPW, White	●				10	63	●
93104628	MPS8-40ML-NL-EDU	78531140243	LED, 8', 80 CRI, 4000K, 9587 LMS, Surface Mount, Wall Mount or Suspended, No Lens, 0-10V Dimming Driver, 120-277V, 80W, 120 LPW, White	●				18	48	●
93104629	MPS8-35ML-NL-EDU	78531140250	LED, 8', 80 CRI, 4000K, 9466 LMS, Surface Mount, Wall Mount or Suspended, No Lens, 0-10V Dimming Driver, 120-277V, 80W, 118 LPW, White	●	●			18	48	●
93105635	MPS8-35ML-CW-EDU	78531140410	LED, 8', 80 CRI, 4000K, 9111 LMS, Surface Mount, Wall Mount or Suspended, No Lens, 0-10V Dimming Driver, 120-277V, 80W, 114 LPW, White	●	●			18	48	●

QS 10

10-Day Quick Ship Ordering Guide

Order Limit Per Fixture Selection: 100

MPS [ ] [ ] - [ ] [ ] - [ ] [ ] [ ] U - [ ]

MODEL
- **MPS** MultiPurpose Linear

SIZE
- **4** 4'
- **8** 8'

CRI
- **Blank** 80

COLOR TEMP
- **35** 3500K
- **40** 4000K
- **50** 5000K

LUMEN OUTPUT
- **LW** 4' (4200), 8' (8400)
- **ML** 4' (4800), 8' (9500)
- **HL** 4' (6000), 8' (12,000)
- **VL** 4' (7100), 8' (14,200)

LENS
- **C** Curve, Frosted Acrylic
- **F** Flat, Frosted Acrylic
- **NL** No Lens

DISTRIBUTION[1]
- **N** Narrow Distribution[2]
- **W** Wide Distribution

DRIVER
- **E** Fixed Output
- **ED** 0-10V Dimming
- **ED1** 0-10V 1% Dimming

VOLTAGE
- **U** 120-277V

OPTIONS
- **ELL14** Emergency Battery Pack, 1400 Lumens, 10W[3,4]

[1] Applicable to lens only
[2] Only available with Curve, Frosted Acrylic lens
[3] Delivered Emergency Lumens = ELL14 = 1210 lms
[4] Emergency battery pack max ambient temperature: 25˚C

*DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org.

ESL – Escalate™ Stairwell Luminaire*

Escalate offers an attractive, intelligent solution to stairwell lighting. Certified to UL924 standards and available with with occupancy controlled dimming, ESL provides safety and energy savings with a clean, modern look.

QS 10 — 10-Day Quick Ship Ordering Guide
Order Limit Per Fixture Selection: 100

ESL	4	-			-	FA	W	-	ED	U	-		
MODEL	SIZE	COLOR TEMP	NOMINAL LUMENS[1]			LENS	DISTRIBUTION		DRIVER	VOLTAGE		OPTIONS	

MODEL
- **ESL** Escalate Stairwell Luminaire

SIZE
- **4** 4'

COLOR TEMP
- **35** 3500K
- **40** 4000K
- **50** 5000K

NOMINAL LUMENS[1]
- **LW** 4' (4100)
- **ML** 4' (4600)
- **HL** 4' (5800)

LENS
- **FA** Frosted Acrylic

DISTRIBUTION
- **W** Wide Distribution

DRIVER
- **ED** 0–10V Dimming[2]

VOLTAGE
- **U** 120–277V

OPTIONS
- **ELL14** Emergency Battery Pack, 10W[3]

CONTROL OPTIONS
- **NXOS** NX, PIR BT Occupancy/Daylight Sensor, Round Ceiling Mount

[1] Nominal lumen output, refer to specification sheet Delivered Lumens table for exact values and available lumen outputs for fixture size
[2] External dimming leads not available
[3] For compatibility with Dual-Lite LiteGear® inverters in lieu of installed battery pack, contact Hubbell Lighting representative

CSL – LED Striplight*

The LED striplight brings together an economical price point and high performance.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet	DLC QPL
93075541	CSL4-4035	78531127442	LED, 4', 80 CRI, 3500K, 4231 LMS, Surface Mount or Pendant, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 40W, 105 LPW, White	●	●	●	●	4.9	120	●
93075542	CSL4-4040	78531127459	LED, 4', 80 CRI, 4000K, 4517 LMS, Surface Mount or Pendant, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 40W, 112 LPW, White	●	●	●	●	4.9	120	●
93075543	CSL8-8035	78531127466	LED, 8', 80 CRI, 3500K, 8460 LMS, Surface Mount or Pendant, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 81W, 105 LPW, White	●	●	●	●	10.8	120	●
93075544	CSL8-8040	78531127473	LED, 8', 80 CRI, 4000K, 9036 LMS, Surface Mount or Pendant, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 81W, 112 LPW, White	●	●	●	●	10.8	120	●

CS – Commercial Striplight

The CS is the fluorescent standard strip suitable for utility and light industrial or retail applications.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet
04141009F910000	CS4-132-EU	78531006280	Fluorescent, 4', Designed for 1-4' T8 Lamps, Ceiling Mount or Suspended, 120-277V T8 Electric Ballast, White			●	●	9	77
04241009F910000	CS4-232-EU	78531005016	Fluorescent, 4', Designed for 2-4' T8 Lamps, Ceiling Mount or Suspended, 120-277V T8 Electric Ballast, White		●	●	●	9	77
03441009H910000	CS8-232-4EU	78531005023	Fluorescent, 8', Designed for 4-4' T8 Lamps, Ceiling Mount or Suspended, (1) 4 Lamp T8 120-277V Electric Ballast, White		●	●	●	17	77
93038455	CS8-254-4EPU	78531022976	Fluorescent, 8', Designed for 4-4' T5HO Lamps, Ceiling Mount or Suspended, (1) 4 Lamp T5HO 120-277V Program Start Ballast, White				●	17	77
984084158000000	CSHC	78531000868	Chain Assembly, 14" (Pair)	●	●	●	●	0.2	

*DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org.

CUC – Undercabinet Light

The Undercabinet luminaire is ideal for task lighting in general workspaces, breakrooms and copy rooms in commercial, institutional and government facilities.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet
93097056	CUC1-ED120	78531133580	LED, 1', Undercabinet, 90 CRI, 3000K, 366 LMS, Surface Mount, Polycarbonate Lens, 120V, 705W, 49 LPW, White	●	●			1	1536
93097057	CUC2-ED120	78531133597	LED, 2', Undercabinet, 90 CRI, 3000K, 724 LMS, Surface Mount, Polycarbonate Lens, 120V, 14W, 52 LPW, White	●	●			1.9	756
93097058	CUC3-ED120	78531133603	LED, 3', Undercabinet, 90 CRI, 3000K, 1099 LMS, Surface Mount, Polycarbonate Lens, 120V, 20W, 55 LPW, White	●	●			2.9	648
93097059	CUC4-ED120	78531133610	LED, 4', Undercabinet, 90 CRI, 3000K, 1248 LMS, Surface Mount, Polycarbonate Lens, 120V, 25W, 50 LPW, White	●	●			3.5	504
93097060	CUC-13CC	78531133627	Cord/Plug, 5', 120V	●	●				
93097061	CUC-24CC	78531133634	Connector Cable, 13"	●	●				
93097062	CUC-5F-120-CP	78531133641	Connector Cable, 24"	●	●				

CHB – Linear High Bay*

The CHB is an efficient and economical linear high bay suitable for a variety of areas including warehouses, gyms and mezzanines.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet	DLC QPL
93095151	CHB2-40LX-FA-EDU	78531133351	LED, 2', 80 CRI, 4000K, 11,380 LMS, Chain, Surface or Pendant Mount, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 88W, 130 LPW, White	●	●	●		10.6	44	●
93095155	CHB2-40MH-FA-EDU	78531133399	LED, 2', 80 CRI, 4000K, 21,949 LMS, Chain, Surface or Pendant Mount, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 172W, 127 LPW, White	●	●	●		10.6	44	●
93095153	CHB2-40ML-FA-EDU	78531133375	LED, 2', 80 CRI, 4000K, 17,013 LMS, Chain, Surface or Pendant Mount, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 133W, 128 LPW, White	●	●	●		10.6	44	●
93095157	CHB2-40MV-FA-EDU	78531133412	LED, 2', 80 CRI, 4000K, 27,343 LMS, Chain, Surface or Pendant Mount, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 212W, 129 LPW, White	●	●	●		13.4	22	●
93095152	CHB2-50LX-FA-EDU	78531133368	LED, 2', 80 CRI, 5000K, 11,483 LMS, Chain, Surface or Pendant Mount, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 88W, 131 LPW, White	●	●	●		10.6	44	●
93095156	CHB2-50MH-FA-EDU	78531133405	LED, 2', 80 CRI, 5000K, 22,038 LMS, Chain, Surface or Pendant Mount, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 172W, 128 LPW, White	●	●	●		10.6	44	●
93095154	CHB2-50ML-FA-EDU	78531133382	LED, 2', 80 CRI, 5000K, 17,105 LMS, Chain, Surface or Pendant Mount, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 132W, 130 LPW, White	●	●	●		10.6	44	●
93095158	CHB2-50MV-FA-EDU	78531133429	LED, 2', 80 CRI, 5000K, 27,522 LMS, Chain, Surface or Pendant Mount, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 213W, 129 LPW, White	●	●	●		13.4	22	●

*DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org.

PEL – Peloton™ High Performance High Bay*

The Peloton™ offers extensive lumen packages, best-in-class efficacy, and long-life for low total cost of ownership and integrated NX Distributed Intelligence™ lighting control options. Perfect for warehouses, gymnasiums, and light industrial applications, the Peloton is your high efficacy, long-life solution.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet
93097506	PEL2-40LX-FAW-EDU	78531133719	LED, 2', 80 CRI, 4000K, 12,229 LMS, Surface Mount or Pendant, Frosted Acrylic Wide Distribution Lens, 0-10V Dimming Driver, 120-277V, 79W, 156 LPW, White				●	15	72
93097510	PEL2-40MH-FAW-EDU	78531133757	LED, 2', 80 CRI, 4000K, 24,327 LMS, Surface Mount or Pendant, Frosted Acrylic Wide Distribution Lens, 0-10V Dimming Driver, 120-277V, 158W, 154 LPW, White	●	●	●	●	20	72
93097508	PEL2-40MM-FAW-EDU	78531133733	LED, 2', 80 CRI, 4000K, 18,731 LMS, Surface Mount or Pendant, Frosted Acrylic Wide Distribution Lens, 0-10V Dimming Driver, 120-277V, 122W, 153 LPW, White				●	18	48
93097507	PEL2-50LX-FAW-EDU	78531133726	LED, 2', 80 CRI, 5000K, 12,299 LMS, Surface Mount or Pendant, Frosted Acrylic Wide Distribution Lens, 0-10V Dimming Driver, 120-277V, 79W, 156 LPW, White				●	15	72
93097512	PEL2-50LX-FAW-EDU-OS1360	78531133771	LED, 2', 80 CRI, 5000K, 12,229 LMS, Surface Mount or Pendant, Frosted Acrylic Wide Distribution Lens, 0-10V Dimming Driver, 120-277V, 79W, 156 LPW, White	●		●		15	54
93097511	PEL2-50MH-FAW-EDU	78531133764	LED, 2', 80 CRI, 5000K, 25,035 LMS, Surface Mount or Pendant, Frosted Acrylic Wide Distribution Lens, 0-10V Dimming Driver, 120-277V, 157W, 158 LPW, White					20	72
93097514	PEL2-50MH-FAW-EDU-OS1360	78531133795	LED, 2', 80 CRI, 5000K, 25,035 LMS, Surface Mount or Pendant, Frosted Acrylic Wide Distribution Lens, 0-10V Dimming Driver, 120-277V, 159W, 152 LPW, White					20	54
93097509	PEL2-50MM-FAW-EDU	78531133740	LED, 2', 80 CRI, 5000K, 19,731 LMS, Surface Mount or Pendant, Frosted Acrylic Wide Distribution Lens, 0-10V Dimming Driver, 120-277V, 123W, 153 LPW, White				●	18	48
93097513	PEL2-50MM-FAW-EDU-OS1360	78531133788	LED, 2', 80 CRI, 5000K, 18,731 LMS, Surface Mount or Pendant, Frosted Acrylic Wide Distribution Lens, 0-10V Dimming Driver, 120-277V, 123W, 153 LPW, White					18	36
PELTH	PELTH	78531138561	Tong Hanger (Pair)				●	N/A	
PELWG4-2	PELWG4-2	78531138653	Wire Guard, 2' For 12K - 18K LMS				●	N/A	
PELWG6-2	PELWG6-2	78531138677	Wire Guard, 2' For 24K - 30K LMS				●	N/A	
LHVQM10	LHVQM10	78531012526	Aircraft Cable Hangers, 10' pair)	●	●	●	●	N/A	
LHVQM5	LHVQM5	78531012670	Aircraft Cable Hangers, 5' pair)	●	●	●	●	N/A	

*DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org.

Peloton™ High Performance High Bay (continued)

10-Day Quick Ship Ordering Guide
Order Limit Per Fixture Selection: 100

PEL [ ] - [ ] [ ] [ ] [ ] - [ ] [ ] - [ ] - [ ] [ ] - [ ] [ ]

MODEL
- **PEL** Peloton™ High Performance High Bay

SIZE
- **2** 2'
- **4** 4'

CRI
- **Blank** 80

COLOR TEMP
- **40** 4000K
- **50** 5000K

LUMEN OUTPUT[1]
- **LH** Low Lumen Package / High Range, 8,000 (2FT ONLY)
- **LX** Low Lumen Package / Extra High Range, 12,000 (2FT ONLY)
- **ML** Medium Lumen Package / Low Range, 15,000 (2FT ONLY)
- **MM** Medium Lumen Package / Medium Range, 18,000 (2FT ONLY)
- **MH** Medium Lumen Package / High Range, 24,000 (2FT ONLY)
- **MV** Medium Lumen Package / Very High Rnage, 30,000 (4FT ONLY)
- **MX** Medium Lumen Package / Extra High Range, 36,000 (4FT ONLY)

LENS
- **FA** Frosted Acrylic
- **Blank** No Lens

EFFICACY
- **Blank** Standard Efficacy

DISTRIBUTION
- **W** Wide Distribution
- **N** Narrow Distribution

UPLIGHT
- **Blank** No Uplight

DRIVER
- **E** Fixed Output
- **ED** 0-10V Dimming

VOLTAGE
- **U** 120-277V

U

OPTIONS
- **C6TL20_** 6' Cord and Twist-Lock™ Plug 20A (Add Voltage 1=120, 2=277)
- **C6TL15_** 6' Cord and Twist-Lock™ Plug 15A (Add Voltage 1=120, 2=277)
- **C6P151** 6' Cord and Straight Blade Plug 15A, 120V
- **F3C5** 5', 3-Conductor Cord
- **F4C5** 5', 4-Conductor Cord
- **WG** Wire Guard
- **ELL14** Emergency Battery Pack, 1400 Lumens, 10 watt

CONTROL OPTIONS
- **OS1360** Factory Installed On/Off Occupancy/Daylight, Sensor, 1-relay, 360° lens 120/277[1]

[1] OS1360/A sensor option will use HCS Wasp2 surface mount sensor.

HBL – LED High Bay Series

Heavy industrial, cast aluminum LED high bay with high ambient temperature up to 55°C.

10-Day Quick Ship Ordering Guide
Order Limit Per Fixture Selection: 50

HBL - [ ] - U - A - 2 - [ ] - [ ] - 070 - ND - [ ] - [ ]

SERIES
- **HBL** LED High Bay

NUMBER OF LEDS
- **60L** 60 High brightness LEDs
- **72L** 72 High brightness LEDs

MOUNT
- **A** Pendant

VOLTAGE
- **U** 120 - 277V

Notes: Voltage must be specified for Fusing and Occupancy Sensor compatibility. Refer to product spec sheet for 480V specification requirements.

HUB
- **2** ¾" Hub

COLOR TEMP
- **3K** 3000K
- **4K** 4000K
- **5K** 5000K

DISTRIBUTION
- **N** Narrow
- **W** Wide

DRIVE CURRENT
- **070** 700 MA

DIMMING
- **ND** Non Dimming

COLORS
- **GR** Gray
- **WH** White

OPTIONS
- **Fx** Fusing (Replace "x" with voltage - Refer to spec sheet for more info.)
- **ENCA** Frosted Acrylic Protective Lens
- **ENCG** Glass Protective Lens
- **OCS(X)** Occupancy Sensor
- **WG** Zinc Plated Wire Gaurd

Notes:
1. OCS unavailable with ENCA or ENCG options

Accessories - Order Separately

Catalog Number	Description
HOOK/LOOP	Fixture Mounting Hook
BLA-C4HLPX	Cord and Plug Set
LG2S	DUAL-LITE 250 VA LiteGear Emergency Lighting Inverter
Note: One (1) LED Highbay per LG2S	

*DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org.

CRN – Wet Location High Bay*

The CRN is an efficient wet location high bay suitable for a variety of areas including warehouses, gyms, covered outdoor areas, garden centers and mezzanines.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet	DLC QPL
93097494	CRN-40LX-EDU	785988042913	LED, 15", Wet Location High Bay, 80 CRI, 4000K, 14,426 LMS, Pendant Mount, 0-10V Dimming Driver, 120-277V, 100W, 144 LPW, White	●		●		38.75	20	●
93097495	CRN-40MM-EDU	785988042920	LED, 15", Wet Location High Bay, 80 CRI, 4000K, 21,678 LMS, Pendant Mount, 0-10V Dimming Driver, 120-277V, 150W, 144 LPW, White	●		●		39.45	20	●
93097496	CRN-40MV-EDU	785988042937	LED, 15", Wet Location High Bay, 80 CRI, 4000K, 28,618 LMS, Pendant Mount, 0-10V Dimming Driver, 120-277V, 201W, 142 LPW, White	●		●		40.35	20	●
93097497	CRN-40MX-EDU	785988042944	LED, 15", Wet Location High Bay, 80 CRI, 4000K, 33,520 LMS, Pendant Mount, 0-10V Dimming Driver, 120-277V, 239W, 140 LPW, White	●		●		41.3	20	●
93097498	CRN-50LX-EDU	785988042951	LED, 15", Wet Location High Bay, 80 CRI, 5000K, 14,628 LMS, Pendant Mount, 0-10V Dimming Driver, 120-277V, 100W, 146 LPW, White	●		●		36	20	●
93097499	CRN-50MM-EDU	785988042968	LED, 15", Wet Location High Bay, 80 CRI, 5000K, 21,981 LMS, Pendant Mount, 0-10V Dimming Driver, 120-277V, 150W, 146 LPW, White	●		●		22.8	20	●
93097500	CRN-50MV-EDU	785988042975	LED, 15", Wet Location High Bay, 80 CRI, 5000K, 29,018 LMS, Pendant Mount, 0-10V Dimming Driver, 120-277V, 201W, 144 LPW, White	●		●		37.5	20	●
93097501	CRN-50MX-EDU	785988042982	LED, 15", Wet Location High Bay, 80 CRI, 5000K, 33,989 LMS, Pendant Mount, 0-10V Dimming Driver, 120-277V, 239W, 142 LPW, White	●		●		41.7	20	●
93097503	CRNAL18	785988043002	Clear Acrylic Reflector	●		●		41.7	16	
93097504	CRNWA18	785988043019	Diffuse Acrylic Reflector	●		●		11.28	28	
93097502	CRNWW18	785988042999	Aluminum Reflector	●		●		1	28	

LXEN – Narrow LED Enclosed and Gasketed Luminaire*

LXEN is a narrow, multi-functional enclosed LED product which serves rugged to severe conditions as well as food service areas.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet	DLC QPL
93092867	LXEN4-40XW-RFA-EDU	78531126346	LED, 4', 80 CRI, 4000K, 2095 LMS, Surface Mount, Ribbed Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 18W, 116 LPW, White			●				●

*DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org.

LXEM – LED Enclosed and Gasketed Luminaire*

LXEM is a multi-functional enclosed LED product which serves rugged to severe conditions as well as food service areas.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet	DLC QPL
93085493	LXEM4-35ML-RFA-EDU	78531131821	LED, 4', 80 CRI, 3500K, 5009 LMS, Surface Mount, Ribbed Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 42W, 121 LPW, White			●		14	55	●
93085492	LXEM4-40HL-RFA-EDU	78531124700	LED, 4', 80 CRI, 4000K, 6222 LMS, Surface Mount, Ribbed Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 47W, 139 LPW, White			●	●	14	55	●
93085491	LXEM4-40ML-RFA-EDU	78531123932	LED, 4', 80 CRI, 4000K, 5168 LMS, Surface Mount, Ribbed Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 42W, 123 LPW, White	●	●	●	●	14	55	●
93085494	LXEM8-40ML-RFA-EDU	78531125189	LED, 8', 80 CRI, 4000K, 10,336 LMS, Surface Mount, Ribbed Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 84W, 123 LPW, White		●	●	●	30	45	●

QS 10 10-Day Quick Ship Ordering Guide
Order Limit Per Fixture Selection: 50

LXEM [ ] – [ ] [ ] – RFA [ ] U – [ ]

MODEL
- **LXEM** LED Enclosed and Gasketed

SIZE
- **4** 4'
- **8** 8'

COLOR TEMP
- **35** 3500K
- **40** 4000K

LUMEN OUTPUT
- **LW** Low Watt
- **ML** Medium Lumen
- **HL** High Lumen
- **VL** Very High Lumen

SHIELDING
- **RFA** Ribbed Frosted Acrylic

DRIVER
- **E** Fixed Output
- **ED** 0-10V Dimming
- **ED1** 0-10V 1% Dimming

VOLTAGE
- **U** 120V-277V

OPTIONS
- **SSL** Stainless Steel Tamper Resistant Ready Latches
- **TP** Tamper Proof Latches
- **ELL14** Emergency Battery Pack Installed, 1400 Lumens

CVT — Linear Vaportite*

A narrow body linear vaportite that offers Switchable Lumen outputs and multiple mounting options for easy installation in both retrofits and new construction.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet	DLC QPL
93123404	CVT4–LS40	840141400242	4' LED Vaportite, Switchable Lumens 7000/5800/4500, 4000K, 120-277V	●	●			4.4	24	●
93123405	CVT4–LS50	840141400259	4' LED Vaportite, Switchable Lumens 7000/5800/4500, 5000K, 120-277V	●	●			4.4	24	●

*DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org.

CTK – LED Troffer Retrofit Kit*

Retrofit for existing prismatic or parabolic troffers with integrated assembly for easy installation.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet	DLC QPL
93123046	CTK22–2835	840141400143	2x2 Retrofit Kit, 2800 Lumens, 3500K	●	●			3.9	40	●
93123047	CTK22–2840	840141400150	2x2 Retrofit Kit, 2800 Lumens, 4000K	●	●			3.9	40	●
93123044	CTK22–3335	840141400129	2x2 Retrofit Kit, 3300 Lumens, 3500K	●	●			3.9	40	●
93123045	CTK22–3340	840141400136	2x2 Retrofit Kit, 3300 Lumens, 4000K	●	●			3.9	40	●
93123042	CTK22–4035	840141400105	2x2 Retrofit Kit, 4000 Lumens, 3500K	●	●			3.9	40	●
93123043	CTK22–4040	840141400112	2x2 Retrofit Kit, 4000 Lumens, 4000K	●	●			3.9	40	●
93123052	CTK24–2535	840141400204	2x4 Retrofit Kit, 2800 Lumens, 3500K	●	●			6.4	20	
93123053	CTK24–2540	840141400211	2x4 Retrofit Kit, 2800 Lumens, 4000K	●	●			6.4	20	
93123050	CTK24–3535	840141400181	2x4 Retrofit Kit, 3300 Lumens, 3500K	●	●			6.4	20	●
93123051	CTK24–3540	840141400198	2x4 Retrofit Kit, 3300 Lumens, 4000K	●	●			6.4	20	●
93123048	CTK24–4435	840141400167	2x4 Retrofit Kit, 4000 Lumens, 3500K	●	●			6.4	20	●
93123049	CTK24–4440	840141400174	2x4 Retrofit Kit, 4000 Lumens, 4000K	●	●			6.4	20	●



GORK - LED Prismatic Troffer Retrofit Kit*

A low-cost LED retrofit for prismatic troffers that delivers over 104 lumens per watt, and can be installed in just five minutes.

5-Day Quick Ship Ordering Guide
Order Limit Per Fixture Selection: 100

GORK - [ ] - [ ] - [ ]

MODEL
- **GORK** LED Retrofit Kit

SIZE
- **22** 2' × 2' Nominal
- **24** 2' × 4' Nominal

COLOR TEMP
- **35** 3500K
- **40** 4000K

LUMEN OUTPUT
- **MW** Medium Low Wattage
- **LW** Low Wattage
- **ML** Medium Lumen

DRIVER
- **E** Fixed Output
- **ED** 0-10V Dimming[1]

VOLTAGE
- **U** Universal 120-277 VAC

[1] Must be used in conjunction with lighting controls.

*DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org.

SLK – LED Troffer Conversion Kit*

SLK LED Retrofit Kit is designed to be a quick, efficient and aesthetically pleasing upgrade from traditional troffers while matching the design of the Columbia Lighting LCAT luminaire.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet	DLC QPL
93072852	SLK22-40ML-EDU	78531126827	LED, 2'x2', Retrofit Kit, 80 CRI, 4000K, 3473 LMS, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 29W, 120 LPW, White			●		10	40	●
93085342	SLK22-40VWHE-EDU	78531131661	LED, 2'x2', Retrofit Kit, 80 CRI, 4000K, 1600 LMS, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 13W, 123 LPW, White	●				10	40	●
93077320	SLK24-40LW-EDU	78531127398	LED, 2'x4', Retrofit Kit, 80 CRI, 4000K, 4642 LMS, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 36W, 124 LPW, White			●	●	20	20	●
93085344	SLK24-40MWHE-EDU	78531131685	LED, 2'x4', Retrofit Kit, 80 CRI, 4000K, 3888 LMS, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 31W, 125 LPW, White	●				20	20	●
93085343	SLK24-40VWHE-EDU	78531131678	LED, 2'x4', Retrofit Kit, 80 CRI, 4000K, 3462 LMS, Frosted Acrylic Lens, 0-10V Dimming Driver, 120-277V, 27W, 128 LPW, White	●				20	20	●

5-Day Quick Ship Ordering Guide
Order Limit Per Fixture Selection: 250

SLK [ ] - [ ] [ ] - [ ] U - [ ]

MODEL
- **SLK** LED Troffer Conversion Kit

SIZE
- **22** 2' × 2'
- **24** 2' × 4'

COLOR TEMP
- **35** 3500K
- **40** 4000K

LUMEN OUTPUT
- **LW** Low Wattage
- **ML** Medium Lumen
- **HL** High Lumen
- **VL** Very High Lumen (2x2 Only)

DRIVER
- **E** Fixed Output
- **ED** 0-10V Dimming
- **ED1** 0-10V 1% Dimming

VOLTAGE
- **U** 120-277 VAC

OPTIONS
- **ELL14** Emergency Battery Pack Installed, 1400 Lumens

LSRK – Linear Strip Retrofit Kit*

Quickly and easily attaches to existing housings, making it a stylish, simple way to convert linear fluorescent fixtures to the latest LED technology. An attractive lens option makes the LSRK suitable for both front and back of house.

5-Day Quick Ship Ordering Guide
Order Limit Per Fixture Selection: 150

LSRK [ ] - 4W - [ ] [ ] - [ ] - [ ] U - [ ]

MODEL
- **LSRK** Linear Strip Retrofit Kit

SIZE
- **4** 4'
- **8** 8'

CHANNEL WIDTH
- **4W** 4.25" Nominal

COLOR TEMP
- **40** 4000K
- **50** 5000K

LUMEN OUTPUT
- **XW** Extra Low Watt
- **MW** Medium Low Watt
- **ML** Medium Lumen

LENS
- **Blank** No Lens
- **FA** Frosted Acrylic Lens with Endcaps

DRIVER
- **E** Fixed Output
- **ED** 0-10V Dimming

VOLTAGE
- **U** 120V-277V

OPTIONS
- **ELL14** Emergency Battery Pack Installed, 1400 Lumens
- **ODP** Occupancy and Daylight Sensors, Philips EasySense, mounted on FA Lens

*DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org.

Columbia Lighting Accessories

Accessories

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet
FK14	FK14	78531000745	Flange Kit, 1'x4'	●	●	●	●	5	
FK22	FK22	78531000752	Flange Kit, 2'x2'	●	●	●	●	5	
FK24	FK24	78531038991	Flange Kit, 2'x4'	●	●	●	●	5	
GLH5	GLH5	78531012700	Adjustable Cable Kit, 5'	●	●	●		0.3	
GLH10	GLH10	78531013127	Adjustable Cable Kit, 10'	●	●	●		0.4	
980000011000000	S18	78531000790	Stem and Canopy, 18"	●		●	●	8	
980000010000000	SS18	78531003456	Stem Only, 18"	●	●	●		5	

*DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org.

Columbia LIGHTING

LITEISTRY™ 3" LED Round Housings and Trims

The LITEISTRY family, including LTR-3RD downlights and wall washers, offers a broad palette of architectural downlighting solutions with consistent aperture appearance, quiet ceiling design, and optical performance.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty.	ENERGY STAR®
BG1612200	LTR-3RD-RH-SL06L-DM1/ LTR-3RD-T-SL35K8WDSS	785235432948	LED, 3" Downlight Housing and Trim, Remodel, Round, 600 LMS, 0-10V 1% Dimming Driver, 120-277V, 80+ CRI, 3500K, Wide, Semi-Specular Clear Reflector	●	●			1.95	1	●
BG1612300	LTR-3RD-RH-SL10L-DM1/ LTR-3RD-T-SL35K8WDSS	785235432955	LED, 3" Downlight Housing and Trim, Remodel, Round, 1000 LMS, 0-10V 1% Dimming Driver, 120-277V, 80+ CRI, 3500K, Wide, Semi-Specular Clear Reflector	●	●			1.95	1	●
BG1612400	LTR-3RD-RH-SL15L-DM1/ LTR-3RD-T-SL35K8WDSS	785235432962	LED, 3" Downlight Housing and Trim, Remodel, Round, 1500 LMS, 0-10V 1% Dimming Driver, 120-277V, 80+ CRI, 3500K, Wide, Semi-Specular Clear Reflector	●	●			1.95	1	●
BG1610200	LTR-3RD-RH-ML20L-DM1/ LTR-3RD-T-ML35K8WDSS	785235432979	LED, 3" Downlight Housing and Trim, Remodel, Round, 2000 LMS, 0-10V 1% Dimming Driver, 120-277V, 80+ CRI, 3500K, Wide, Semi-Specular Clear Reflector	●	●			1.95	1	●
BG1617500	LTR-3RD-H-SL06L-DM1CP	785235433563	LED, 3" Downlight Housing, New Construction, Round, Standard Lumen, 600 LMS, 0-10V 1% Dimming Driver, 120-277V, Chicago Plenum			●		12.67	1	
BG1617600	LTR-3RD-H-SL10L-DM1CP	785235433570	LED, 3" Downlight Housing, New Construction, Round, Standard Lumen, 1000 LMS, 0-10V 1% Dimming Driver, 120-277V, Chicago Plenum			●		12.67	1	
BG1617700	LTR-3RD-H-SL15L-DM1CP	785235433587	LED, 3" Downlight Housing, New Construction, Round, Standard Lumen, 1500 LMS, 0-10V 1% Dimming Driver, 120-277V, Chicago Plenum			●		12.67	1	

LITEISTRY™ 3" LED Square Housings and Trims

The LITEISTRY family, including LTR-3SQD downlights, offers a broad palette of architectural downlighting solutions with consistent aperture appearance, quiet ceiling design, and optical performance.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty.	ENERGY STAR®
BG1614600	LTR-3SQD-RH-SL06L-DM1/ LTR-3SQD-T-SL35K8WDSS	785235433297	LED, 3" Downlight Housing and Trim, Remodel, Square, 600 LMS, 0-10V 1% Dimming Driver, 120-277V, 80+ CRI, 3500K, Wide, Semi-Specular Clear Reflector	●	●			1.75	1	●
BG1614700	LTR-3SQD-RH-SL10L-DM1/ LTR-3SQD-T-SL35K8WDSS	785235433303	LED, 3" Downlight Housing and Trim, Remodel, Square, 1000 LMS, 0-10V 1% Dimming Driver, 120-277V, 80+ CRI, 3500K, Wide, Semi-Specular Clear Reflector	●	●			1.75	1	●
BG1614800	LTR-3SQD-RH-SL15L-DM1/ LTR-3SQD-T-SL35K8WDSS	785235433310	LED, 3" Downlight Housing and Trim, Remodel, Square, 1500 LMS, 0-10V 1% Dimming Driver, 120-277V, 80+ CRI, 3500K, Wide, Semi-Specular Clear Reflector	●	●			1.75	1	●
BG1614900	LTR-3SQD-RH-ML20L-DM1/LTR-3SQD-T-ML35K8WDSS	785235433327	LED, 3" Downlight Housing and Trim, Remodel, Square, 2000 LMS, 0-10V 1% Dimming Driver, 120-277V, 80+ CRI, 3500K, Wide, Semi-Specular Clear Reflector	●	●			1.75	1	●

ENERGY STAR® Certified. Please refer to ENERGY STAR website for more details at www.energystar.gov.

LITEISTRY™ 4" LED Round Housings and Trims

The LITEISTRY family, including LTR-4RD downlights and wall washers, offers a broad palette of architectural downlighting solutions with consistent aperture appearance, quiet ceiling design, and optical performance.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty.	ENERGY STAR®
BG1612600	LTR-4RD-H-SL10L-DM1	785235433037	LED, 4" Downlight Housing, New Construction, Round, Standard Lumen, 1000 LMS, 0-10V 1% Dimming Driver, 120-277V	●	●			3.85	2	●
BG1612700	LTR-4RD-H-SL15L-DM1	785235433044	LED, 4" Downlight Housing, New Construction, Round, Standard Lumen, 1500 LMS, 0-10V 1% Dimming Driver, 120-277V	●	●			3.85	2	●
BG1617300	LTR-4RD-H-SL10L-DM1CP	785235433594	LED, 4" Downlight Housing, New Construction, Round, Standard Lumen, 1000 LMS, 0-10V 1% Dimming Driver, 120-277V, Chicago Plenum			●		12.25	1	
BG1617400	LTR-4RD-H-SL15L-DM1CP	785235433600	LED, 4" Downlight Housing, New Construction, Round, Standard Lumen, 1500 LMS, 0-10V 1% Dimming Driver, 120-277V, Chicago Plenum			●		12.25	1	
BG1610900	LTR-4RD-T-SL35K8WDSS	785235433068	LED, 4" Downlight Trim, Round, Standard Lumen, 80+ CRI, 3500K, Wide, Semi-Specular Clear Reflector	●	●			2.15	1	●
BG1611700	LTR-4RD-T-SL35K8WDSSWT	785235433006	LED, 4" Downlight Trim, Round, Standard Lumen, 80+ CRI, 3500K, Wide, Semi-Specular Clear Reflector, White Flange, White Flange	●	●			2.15	1	●
BG1619100	LTR-4RW-T-SL35K8WWSS	785235433617	LED, 4" Wall Wash Trim, Round, Standard Lumen, 80+ CRI, 3500K, Single Open WW, Semi-Specular Clear Reflector	●	●			2.15	1	●
BG1612800	LTR-4RD-H-ML20L-DM1	785235433013	LED, 4" Downlight Housing, New Construction, Round, Medium Lumen, 2000 LMS, 0-10V 1% Dimming Driver, 120-277V	●	●			3.85	2	●
BG1612500	LTR-4RD-H-ML30L-DM1	785235433020	LED, 4" Downlight Housing, New Construction, Round, Medium Lumen, 3000 LMS, 0-10V 1% Dimming Driver, 120-277V	●	●			3.85	2	●
BG1610800	LTR-4RD-T-ML35K8WDSS	785235433105	LED, 4" Downlight Trim, Round, Medium Lumen, 80+ CRI, 3500K, Wide, Semi-Specular Clear Reflector	●	●			2.15	1	●
BG1610300	LTR-4RD-T-ML35K8WDSSWT	785235433051	LED, 4" Downlight Trim, Round, Medium Lumen, 80+ CRI, 3500K, Wide, Semi-Specular Clear Reflector, White Flange	●	●			2.15	1	●
BG1619200	LTR-4RW-T-ML35K8WWSS	785235433624	LED, 4" Wall Wash Trim, Round, Medium Lumen, 80+ CRI, 3500K, Single Open WW, Semi-Specular Clear Reflector	●	●			2.15	1	●
BG1610700	LTR-4RD-H-HL40L-DM1	785235432986	LED, 4" Downlight Housing, New Construction, Round, High Lumen, 4000 LMS, 0-10V 1% Dimming Driver, 120-277V	●	●			3.85	2	●
BG1611200	LTR-4RD-T-HL35K8WDSS	785235432993	LED, 4" Downlight Trim, Round, High Lumen, 80+ CRI, 3500K, Wide, Semi-Specular Clear Reflector	●	●			2.15	1	●
BG1611300	LTR-4RD-T-HL35K8WDSSWT	785235433112	LED, 4" Downlight Trim, Round, High Lumen, 80+ CRI, 3500K, Wide, Semi-Specular Clear Reflector, White Flange	●	●			2.15	1	●

ENERGY STAR® Certified. Please refer to ENERGY STAR website for more details at www.energystar.gov.



LITEISTRY™ 4" LED Square Housings and Trims

The LITEISTRY family, including LTR-4SQD downlights, offers a broad palette of architectural downlighting solutions with consistent aperture appearance, quiet ceiling design, and optical performance.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty.	ENERGY STAR®
BG1615300	LTR-4SQD-H-SL10L-DM1	785235433365	LED, 4" Downlight Housing, New Construction, Square, Standard Lumen, 1000 LMS, 0-10V 1% Dimming Driver, 120-277V	●	●			3.85	2	●
BG1615400	LTR-4SQD-H-SL15L-DM1	785235433372	LED, 4" Downlight Housing, New Construction, Square, Standard Lumen, 1500 LMS, 0-10V 1% Dimming Driver, 120-277V	●	●			3.85	2	●
BG1615500	LTR-4SQD-T-SL35K8WDSS	785235433389	LED, 4" Downlight Trim, Square, Standard Lumen, 80+ CRI, 3500K, Wide, Semi-Specular Clear Reflector	●	●			2.95	1	●
BG1615800	LTR-4SQD-T-SL35K8WDSSWT	785235433419	LED, 4" Downlight Trim, Square, Standard Lumen, 80+ CRI, 3500K, Wide, Semi-Specular Clear Reflector, White Flange	●	●			2.95	1	●
BG1615000	LTR-4SQD-H-ML20L-DM1	785235433334	LED, 4" Downlight Housing, New Construction, Square, Medium Lumen, 2000 LMS, 0-10V 1% Dimming Driver, 120-277V	●	●			3.85	2	●
BG1615100	LTR-4SQD-H-ML30L-DM1	785235433341	LED, 4" Downlight Housing, New Construction, Square, Medium Lumen, 3000 LMS, 0-10V 1% Dimming Driver, 120-277V	●	●			3.85	2	●
BG1615600	LTR-4SQD-T-ML35K8WDSS	785235433396	LED, 4" Downlight Trim, Square, Medium Lumen, 80+ CRI, 3500K, Wide, Semi-Specular Clear Reflector	●	●			2.95	1	●
BG1615900	LTR-4SQD-T-ML35K8WDSSWT	785235433426	LED, 4" Downlight Trim, Square, Medium Lumen, 80+ CRI, 3500K, Wide, Semi-Specular Clear Reflector, White Flange	●	●			2.95	1	●
BG1615200	LTR-4SQD-H-HL40L-DM1	785235433358	LED, 4" Downlight Housing, New Construction, Square, High Lumen, 4000 LMS, 0-10V 1% Dimming Driver, 120-277V	●	●			3.85	2	●
BG1615700	LTR-4SQD-T-HL35K8WDSS	785235433402	LED, 4" Downlight Trim, Square, High Lumen, 80+ CRI, 3500K, Wide, Semi-Specular Clear Reflector	●	●			2.95	1	●
BG1616000	LTR-4SQD-T-HL35K8WDSSWT	785235433433	LED, 4" Downlight Trim, Square, High Lumen, 80+ CRI, 3500K, Wide, Semi-Specular Clear Reflector, White Flange	●	●			2.95	1	●

ENERGY STAR® Certified. Please refer to ENERGY STAR website for more details at www.energystar.gov.

LITEISTRY™ 6" LED Round Housings and Trims

The LITEISTRY family, including LTR-6RD downlights and wall washers, offers a broad palette of architectural downlighting solutions with consistent aperture appearance, quiet ceiling design, and optical performance.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty.	ENERGY STAR®
BG1613000	LTR-6RD-H-SL10L-DM1	785235433150	LED, 6" Downlight Housing, New Construction, Round, Standard Lumen, 1000 LMS, 0-10V 1% Dimming Driver, 120-277V	●	●			3.4	2	●
BG1613100	LTR-6RD-H-SL15L-DM1	785235433167	LED, 6" Downlight Housing, New Construction, Round, Standard Lumen, 1500 LMS, 0-10V 1% Dimming Driver, 120-277V	●	●			3.4	2	●
BG1611100	LTR-6RD-T-SL35K8WDSS	785235433235	LED, 6" Downlight Trim, Round, Standard Lumen, 80+ CRI, 3500K, Wide, Semi-Specular Clear Reflector	●	●			4.1	1	●
BG1612000	LTR-6RD-T-SL35K8WDSSWT	785235433211	LED, 6" Downlight Trim, Round, Standard Lumen, 80+ CRI, 3500K, Wide, Semi-Specular Reflector Finish, White Flange	●	●			4.1	1	●
BG1619300	LTR-6RW-T-SL35K8WWSS	785235433631	LED, 6" Wall Wash Trim, Round, Standard Lumen, 80+ CRI, 3500K, Single Open WW, Semi-Specular Clear Reflector	●	●			2.15	1	●
BG1613200	LTR-6RD-H-ML20L-DM1	785235433174	LED, 6" Downlight Housing, New Construction, Round, Medium Lumen, 2000 LMS, 0-10V 1% Dimming Driver, 120-277V	●	●			3.4	2	●
BG1613300	LTR-6RD-H-ML30L-DM1	785235433136	LED, 6" Downlight Housing, New Construction, Round, Medium Lumen, 3000 LMS, 0-10V 1% Dimming Driver, 120-277V	●	●			3.4	2	●
BG1611000	LTR-6RD-T-ML35K8WDSS	785235433198	LED, 6" Downlight Trim, Round, Medium Lumen, 80+ CRI, 3500K, Wide, Semi-Specular Clear Reflector	●	●			4.1	1	●
BG1610600	LTR-6RD-T-ML35K8WDSSWT	785235433228	LED, 6" Downlight Trim, Round, Medium Lumen, 80+ CRI, 3500K, Wide, Semi-Specular Clear Reflector, White Flange	●	●			4.1	1	●
BG1619400	LTR-6RW-T-ML35K8WWSS	785235433648	LED, 6" Wall Wash Trim, Round, Medium Lumen, 80+ CRI, 3500K, Single Open WW, Semi-Specular Clear Reflector	●	●			4.15	1	●
BG1612900	LTR-6RD-H-HL40L-DM1	785235433143	LED, 6" Downlight Housing, New Construction, Round, High Lumen, 4000 LMS, 0-10V 1% Dimming Driver, 120-277V	●	●			3.4	2	●
BG1611500	LTR-6RD-T-HL35K8WDSS	785235433204	LED, 6" Downlight Trim, Round, High Lumen, 80+ CRI, 3500K, Wide, Semi-Specular Clear Reflector	●	●			4.1	1	●
BG1610500	LTR-6RD-T-HL35K8WDSSWT	785235433181	LED, 6" Downlight Trim, Round, High Lumen, 80+ CRI, 3500K, Wide, Semi-Specular Clear Reflector, White Flange	●	●			4.1	1	●
BG1611800	LTR-6RD-H-VL60L-DM1	785235433129	LED, 6" Downlight Housing, New Construction, Round, Very High Lumen, 6000 LMS, 0-10V 1% Dimming Driver, 120-277V	●	●			2.5	2	●

ENERGY STAR® Certified. Please refer to ENERGY STAR website for more details at www.energystar.gov.

LITEISTRY™ 6" LED Square Housings and Trims

The LITEISTRY family, including LTR-6RD downlights and wall washers, offers a broad palette of architectural downlighting solutions with consistent aperture appearance, quiet ceiling design, and optical performance.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty.	ENERGY STAR®
BG1616400	LTR-6SQD-H-SL10L-DM1	785235433471	LED, 6" Downlight Housing, New Construction, Square, Standard Lumen, 1000 LMS, 0-10V 1% Dimming Driver, 120-277V	●	●			3.4	2	●
BG1616500	LTR-6SQD-H-SL15L-DM1	785235433488	LED, 6" Downlight Housing, New Construction, Square, Standard Lumen, 1500 LMS, 0-10V 1% Dimming Driver, 120-277V	●	●			3.4	2	●
BG1616800	LTR-6SQD-T-SL35K8WDSS	785235433518	LED, 6" Downlight Trim, Square, Standard Lumen, 80+ CRI, 3500K, Wide, Semi-Specular Clear Reflector	●	●			4.15	1	●
BG1617000	LTR-6SQD-T-SL35K8WDSSWT	785235433532	LED, 6" Downlight Trim, Square, Standard Lumen, 80+ CRI, 3500K, Wide, Semi-Specular Clear Reflector, White Flange	●	●			4.15	1	●
BG1616600	LTR-6SQD-H-ML20L-DM1	785235433495	LED, 6" Downlight Housing, New Construction, Square, Medium Lumen, 2000 LMS, 0-10V 1% Dimming Driver, 120-277V	●	●			3.4	2	●
BG1616100	LTR-6SQD-H-ML30L-DM1	785235433440	LED, 6" Downlight Housing, New Construction, Square, Medium Lumen, 3000 LMS, 0-10V 1% Dimming Driver, 120-277V	●	●			3.4	2	●
BG1616700	LTR-6SQD-T-ML35K8WDSS	785235433501	LED, 6" Downlight Trim, Square, Medium Lumen, 80+ CRI, 3500K, Wide, Semi-Specular Clear Reflector	●	●			4.15	1	●
BG1617100	LTR-6SQD-T-ML35K8WDSSWT	785235433549	LED, 6" Downlight Trim, Square, Medium Lumen, 80+ CRI, 3500K, Wide, Semi-Specular Clear Reflector, White Flange	●	●			4.15	1	●
BG1616200	LTR-6SQD-H-HL40L-DM1	785235433457	LED, 6" Downlight Housing, New Construction, Square, High Lumen, 4000 LMS, 0-10V 1% Dimming Driver, 120-277V	●	●			3.4	2	●
BG1616900	LTR-6SQD-T-HL35K8WDSS	785235433525	LED, 6" Downlight Trim, Square, High Lumen, 80+ CRI, 3500K, Wide, Semi-Specular Clear Reflector	●	●			4.15	1	●
BG1617200	LTR-6SQD-T-HL35K8WDSSWT	785235433556	LED, 6" Downlight Trim, Square, High Lumen, 80+ CRI, 3500K, Wide, Semi-Specular Clear Reflector, White Flange	●	●			4.15	1	●
BG1616300	LTR-6SQD-H-VL60L-DM1	785235433464	LED, 6" Downlight Housing, New Construction, Square, Very High Lumen, 6000 LMS, 0-10V 1% Dimming Driver, 120-277V	●	●			3.4	2	●

ENERGY STAR® Certified. Please refer to ENERGY STAR website for more details at www.energystar.gov.

D2 Series 2" LED Downlights and Accessories

The D2LED Series 2" architectural LED downlights, adjustable accent and wall washers are designed for use in a variety of architectural, retail, commercial and institutional applications.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty.
BG1578400	D2CP	785235432238	Accessory, Housing, Chicago Plenum			●		7.5	1
BG1603400	FMR2	785235432740	Accessory, Flush Mount Mud Ring			●		0.2	1
BG1603500	AB2AH	785235432757	Accessory, Lens Holder, for AB2LED	●				0.05	1
BG1603600	H11BL	785235432764	Accessory, Louver, Hex Cell, MR11, Black	●				0.05	1
BG1603700	LL11	785235432771	Accessory, Lens, MR11, Linear Spread	●				0.05	1
BG1603800	PL11	785235432788	Accessory, Lens, MR11, Prismatic	●				0.05	1
BG1570400	AML11	785235431484	Accessory, Lens, MR11, Amber Filter	●				0.05	1
BG1570500	BLL11	785235431491	Accessory, Lens, MR11, Blue Filter	●				0.05	1

5-Day Quick-Ship Ordering Guide
Order Limit Per Luminaire Selection: 20 Pieces or Less

J-TUBE ASSEMBLY
- **D2LED** J-Tube Assembly with Standard 0-10V 10% Dimming

VOLTAGE
- *Standard 120/277V*

LIGHT ENGINE
- **2D9LED** 2" Open Reflector/ Light Engine Assembly

OUTPUT
- **9L** 900 Lumens
- **12L** 1200 Lumens
- **15L** 1500 Lumens

LED COLOR
- **30K** 3000 Kelvin
- **35K** 3500 Kelvin

CRI
- **8** Nominal 80+ CRI

BEAM ANGLE
- **WFL45** Spun Aluminum reflector with a 45° wide flood distribution
- **MD25** Spun Aluminum reflector with a 25° medium distribution
- **FL35** Spun Aluminum reflector with a 35° flood distribution
- **WW** Wall Wash

REFLECTOR FINISH
- *Standard Specular*

REFLECTOR COLORS
- *Standard Clear Alzak*

***Reflector finishes other than clear specular are not QS items.**

10-Day Quick-Ship Ordering Guide
Order Limit Per Luminaire Selection: 50 Pieces or Less

J-TUBE ASSEMBLY
- **D2LED** J-Tube Assembly with Standard 0-10V 10% Dimming

VOLTAGE
- *Standard 120/277V*

LIGHT ENGINE
- **2D9LED** 2" Open Reflector/ Light Engine Assembly

OUTPUT
- **9L** 900 Lumens
- **12L** 1200 Lumens
- **15L** 1500 Lumens

LED COLOR
- **30K** 3000 Kelvin
- **35K** 3500 Kelvin

CRI
- **8** Nominal 80+ CRI

BEAM ANGLE
- **WFL45** Spun Aluminum reflector with a 45° wide flood distribution
- **MD25** Spun Aluminum reflector with a 25° medium distribution
- **FL35** Spun Aluminum reflector with a 35° flood distribution
- **WW** Wall Wash

REFLECTOR FINISH
- *Standard Specular*

REFLECTOR COLORS
- *Standard Clear Alzak*

REFLECTOR OPTIONS
- **WT** Painted White Flange only

***Reflector finishes other than clear specular are not QS items.**

D2 Series 2" LED Downlights and Accessories (continued)

10-Day Quick-Ship Ordering Guide
Order Limit Per Luminaire Selection: 50 Pieces or Less

J-TUBE ASSEMBLY
- **A2LED** J-Tube Assembly with Standard 0-10V 10% Dimming

VOLTAGE
- *Standard 120/277V*

LIGHT ENGINE
- **2A9LED** 2" Open Reflector/ Light Engine Assembly

OUTPUT
- **7L** 700 Lumens
- **9L** 900 Lumens
- **12L** 1200 Lumens

LED COLOR
- **30K** 3000 Kelvin
- **35K** 3500 Kelvin

CRI
- **8** Nominal 80+ CRI

BEAM ANGLE
- **FL35** Spun Aluminum reflector with a 35° flood distribution

LOWER REFLECTOR FINISH
- *Standard Specular*

LOWER REFLECTOR COLORS
- *Standard Clear Alzak*

LOWER REFLECTOR OPTIONS
- **WT** Painted White Flange only

***Reflector finishes other than clear specular are not QS items.**



LiteFrame® Commercial LED 4" Housings and Trims

LC4 4" LiteFrame Commercial LED downlights provide the energy efficiency, performance, and long life of our high quality LED downlights at a price comparable to equivalent compact fluorescent fixtures.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty.	ENERGY STAR®
BG1597100	LC4SL	785235432399	LED, 4" Downlight Housing, New Construction, Standard Lumen, 0-10V 10% dimming driver, 120-277V			●		4.97	2	●
BG1597200	4LCSL10L35K8	785235432405	LED, 4" Light Engine Assembly/Trim, 80+ CRI, 3500K, 1000 LMS, Clear Reflector	●				1.72	1	●
BG1597300	4LCSL14L35K8	785235432412	LED, 4" Light Engine Assembly/Trim, 80+ CRI, 3500K, 1400 LMS, Clear Reflector	●		●		1.72	1	●
BG1597400	4LCSL18L35K8	785235432429	LED, 4" Light Engine Assembly/Trim, 80+ CRI, 3500K, 1800 LMS, Clear Reflector			●		1.72	1	●

5-Day Quick Ship Ordering Guide
Order Limit Per Fixture Selection: 20 Pieces or Less

HOUSING
- **LC4SL** Standard lumen 0-10V 10% dimming 120V-277V

DRIVER OPTION
- *Standard 0-10V 10% Dimming*
- **DM1** 0-10V 1% Dimming

TRIM APERTURE
- **4LCSL** Standard Lumen Clear Alzak Reflector

OUTPUT
- **10L** 1000 Lumen
- **14L** 1400 Lumen
- **18L** 1800 Lumen

KELVIN
- **27K** 2700 Kelvin
- **30K** 3000 Kelvin
- **35K** 3500 Kelvin
- **40K** 4000 Kelvin

CRI
- **8** 80+ CRI

REF. FINISH/COLOR OPTION
- **WH** Painted white reflector and trim

REF. OPTIONS
- **WT** Painted white flange only
- **WW** Wall Wash

LiteFrame® Commercial LED 4" Housings and Trims (continued)

10-Day Quick Ship Ordering Guide
Order Limit Per Fixture Selection: 50 Pieces or Less

All Non Stocked LiteFrame Commercial Housings except CP and PowerHUBB™ are Quick Ship.

HOUSING
- **LC4SL** Standard lumen 0-10V 10% dimming 120V-277V

DRIVER OPTION
- *Standard 0-10V 10% Dimming*
- **DM1** 0-10V 1% Dimming

HOUSING OPTION
- **EM** Emergency Battery Pack with integral test switch and indicator light
- **EMR** Remote Battery Pack

TRIM APERTURE
- **4LCSL** Standard Lumen Clear Alzak Reflector

OUTPUT
- **10L** 1000 Lumen
- **14L** 1400 Lumen
- **18L** 1800 Lumen

KELVIN
- **27K** 2700 Kelvin
- **30K** 3000 Kelvin
- **35K** 3500 Kelvin
- **40K** 4000 Kelvin

CRI
- **8** 80+ CRI

REF. FINISH/ COLOR OPTION
- **WH** Painted white reflector and trim

REF. OPTIONS
- **WT** Painted white flange only
- **WW** Wall Wash
- **EM** Pre-punched reflector for integral test switch

LiteFrame® Commercial LED 6" Housings and Trims

LC6 and LC8 6" and 8" LiteFrame Commercial LED downlights provide the energy efficiency, performance, and long life of our high quality LED downlights at a price comparable to equivalent compact fluorescent fixtures.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty.	ENERGY STAR®
BG1577300	LC6SL	785235432108	LED, 6" Downlight Housing, New Construction, Standard Lumen, 0-10V 10% dimming driver, 120-277V	●	●	●		5.58	2	●
BG1578100	LC6SLCP	785235432092	LED, 6" Downlight Housing, New Construction, Standard Lumen, 0-10V 10% dimming driver, 120-277V, Chicago Plenum			●		4.97	1	
BG1569200	6LCSL10L35K8	785235429238	LED, 6" Light Engine Assembly/Trim, 80+ CRI, 3500K, 1000 LMS, Clear Reflector		●	●		1.72	1	●
BG1569300	6LCSL14L35K8	7852354131613	LED, 6" Light Engine Assembly/Trim, 80+ CRI, 3500K, 1400 LMS, Clear Reflector	●	●	●		1.72	1	●
BG1569900	6LCSL14L35K8WH	785235430036	LED, 6" Light Engine Assembly/Trim, 80+ CRI, 3500K, 1400 LMS, White Reflector and Flange	●	●			1.72	1	
BG1569700	6LCSL14L35K8WT	785235430012	LED, 6" Light Engine Assembly/Trim, 80+ CRI, 3500K, 1400 LMS, Clear Reflector, White Flange	●	●			1.72	1	●
BG1570100	6LCSL14L40	785235431125	LED, 6" Light Engine Assembly/Trim, 80+ CRI, 4000K, 1400 LMS, Clear Reflector			●		1.72	1	●
BG1569400	6LCSL18L35K8	785235429252	LED, 6" Light Engine Assembly/Trim, 80+ CRI, 3500K, 1800 LMS, Clear Reflector	●	●	●		1.72	1	●
BG1570000	6LCSL18L40K8	785235431088	LED, 6" Light Engine Assembly/Trim, 80+ CRI, 4000K, 1800 LMS, Clear Reflector			●		1.72	1	●
BG1577700	LC6ML	785235432139	LED, 6" Downlight Housing, New Construction, Medium Lumen, 0-10V 10% dimming driver, 120-277V	●				5.58	2	
BG1526000	6LCML30L35K8	785235430999	LED, 6" Light Engine Assembly/Trim, 80+ CRI, 3500K, 3000 LMS, Clear Reflector	●				3.77	1	

LiteFrame® Commercial LED 6" Housings and Trims (continued)

5-Day Quick Ship Ordering Guide
Order Limit Per Fixture Selection: 20 Pieces or Less

10-Day Quick Ship Ordering Guide
Order Limit Per Fixture Selection: 50 Pieces or Less

HOUSING
- **LC6SL** Standard lumen 0-10V 10% dimming 120V-277V
- **LC6ML** Medium lumen 0-10V 10% dimming 120V-277V

DRIVER OPTION
- *Standard 0-10V 10% Dimming*
- **DM1** 0-10V 1% Dimming

HOUSING OPTION
- **EM** Integral Battery Pack
- **EMR** Remote Battery Pack

TRIM APERTURE
- **6LCSL** Standard Lumen Clear Alzak Reflector
- **6LCML** Medium Lumen Clear Alzak Reflector

OUTPUT
- **10L** 1000 Lumen
- **14L** 1400 Lumen
- **18L** 1800 Lumen
- **24L**[1] 2400 Lumen
- **30L**[1] 3000 Lumen

KELVIN
- **27K** 2700 Kelvin
- **30K** 3000 Kelvin
- **35K** 3500 Kelvin
- **40K** 4000 Kelvin

CRI
- **8** 80+ CRI

REF. FINISH/ COLOR OPTION
- **WH** Painted white reflector and trim

REF. OPTIONS
- **WT** Painted white flange only
- **WW** Wall Wash
- **EM** Pre-punched reflector for integral test switch

1 *24L and 30L is only available with LC6ML housing and 6LCML trim.*

LiteFrame® Commercial LED 6" Cylinders

The LCC6LED is a 6" commercial grade LED cylinder with Nichia LEDs for controlled color consistency delivering 1000 to 3000 lumens.

10-Day Quick Ship Ordering Guide
Order Limit Per Fixture Selection: 50 Pieces or Less

ORDERING INFORMATION **EXAMPLE: LCC6LEDP18L35K8WFL45 BL**

HOUSING
- **LCC6LED** 6" LED Cylinder

MOUNTING
- **P** Pendant
- **S** Surface
- **CM**[1,2] Cord Mount
- **W** Wall Mount

LED COLOR TEMP
- **27K** 2700 Kelvin
- **30K** 3000 Kelvin
- **35K** 3500 Kelvin
- **40K** 4000 Kelvin
- **50K** 5000 Kelvin

CRI
- **8** 80+ CRI

OUTPUT
- **10L** 1000 Delivered Lumens
- **14L** 1400 Delivered Lumens
- **18L** 1800 Delivered Lumens

VOLTAGE
- **Blank** 120V-277V
- **120V** 120 Volt (for 2DM)

OPTIONS
- **Blank** Standard 0-10V dimming to 10%

BEAM
- **WFL45** Nominal 45 Degree Cutoff

REFLECTOR FINISH
- **Blank** Clear Alzak, Semi-Diffuse

REFLECTOR COLOR
- **BC** Painted Black Cone
- **WC** Painted White Cone

CYLINDER COLOR
- **BA** Brushed Aluminum
- **BZ** Bronze
- **BL** Matte Black
- **WH** Matte White
- **Z** Zet

NOTES
1. *Cord length 6 feet, clear sleeve*
2. *Plastic bushings are grey on white, brushed aluminum and zet cylinder; black on black and bronze*

Retroficient LiteFrame Commercial LED 6" Housings and Trims

Retroficient is designed specifically to retrofit into ceilings with existing recessed downlight fixtures.

QS 10 — 10-Day Quick Ship Ordering Guide

Order Limit Per Fixture Selection: 50 Pieces or Less

HOUSING	DRIVER OPTIONS	HOUSING OPTIONS	TRIM APERTURE	OUTPUT	KELVIN	CRI	REF. FINISH/ COLOR OPTION	REF. OPTIONS
RLC6SL Standard Lumen 0-10V Dimming to 10% 120V-277V	*Standard 0-10V 10% Dimming*	**SD** Small Diameter	**6LCSL** Standard Lumen Clear Alzak Reflector	**10L** 1000 Lumen	**27K** 2700 Kelvin	**8** 80+ CRI	**WH** Painted white reflector and trim	**WT** Painted white flange only
RLC6ML Medium Lumen 0-10V Dimming to 10% 120V-277V	**DM1** 0-10V 1% Dimming		**6LCML** Medium Lumen Clear Alzak Reflector	**14L** 1400 Lumen	**30K** 3000 Kelvin			
				18L 1800 Lumen	**35K** 3500 Kelvin			
				24L[1] 2400 Lumen	**40K** 4000 Kelvin			
				30L[1] 3000 Lumen				

1 24L and 30L is only available with RLC6ML housing and 6LCML trim.

Housing Accessories

Accessory bar hangers for use with compatible Prescolite housings.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty.
AE101000	B6	785235208567	Accessory, Bar Hangers for ceiling joists up to 24" centers, set of 2	●	●	●	●	0.9	1
BE767500	B24	785235103633	Accessory, Bar Hangers 24" for T-bar ceilings, set of 2	●	●	●	●	1.6	1

LiteBox® Plus 6" LED Housings and Trims

LiteBox Plus is an entry level commercial downlight and wall wash targeting distributors and contractors that remain price sensitive to using LEDs for general downlighting applications.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty.	ENERGY STAR®
BG1565800	LBP6	785235431316	LED, 6" Downlight Housing, New Construction	●	●	●	●	4.2	8	●
BG1579400	LBP6CP	785235432252	LED, 6" Downlight Housing, New Construction, Chicago Plenum			●		4.2	1	●
BG1569000	6LBP8L30KWH	785235431361	LED, 6" Light Engine Assembly/Trim, 3000K, 800 LMS, Dual 1% dimming driver, White Reflector	●	●			2.55	8	●
BG1569100	6LBP8L35KWH	785235431378	LED, 6" Light Engine Assembly/Trim, 3500K, 800 LMS, Dual 1% dimming driver, White Reflector	●	●			2.55	8	●
BG1601900	6LBP8L40KWH	785235432658	LED, 6" Light Engine Assembly/Trim, 4000K, 800 LMS, Dual 1% dimming driver, White Reflector			●		2.65	8	●
BG1565900	6LBP11L30KWH	785235431323	LED, 6" Light Engine Assembly/Trim, 3000K, 1100 LMS, Dual 1% dimming driver, White Reflector	●		●		2.55	8	●
BG1566000	6LBP11L35KWH	785235431330	LED, 6" Light Engine Assembly/Trim, 3500K, 1100 LMS, Dual 1% dimming driver, White Reflector	●	●			2.55	8	●
BG1602200	6LBP11L35KAZ	785235432689	LED, 6" Light Engine Assembly/Trim, 3500K, 1100 LMS, Dual 1% dimming driver, Clear Alzak Reflector		●			2.65	8	●
BG1602000	6LBP11L40KWH	785235432665	LED, 6" Light Engine Assembly/Trim, 4000K, 1100 LMS, Dual 1% dimming driver, White Reflector			●		2.65	8	●
BG1566100	6LBP15L30KWH	785235431347	LED, 6" Light Engine Assembly/Trim, 3000K, 1500 LMS, Dual 1% dimming driver, White Reflector	●		●		2.55	8	●
BG1566200	6LBP15L35KWH	785235431354	LED, 6" Light Engine Assembly/Trim, 3500K, 1500 LMS, Dual 1% dimming driver, White Reflector	●	●			2.55	8	●
BG1602100	6LBP15L40KWH	785235432672	LED, 6" Light Engine Assembly/Trim, 4000K, 1500 LMS, Dual 1% dimming driver, White Reflector			●		2.65	8	●

LiteBox® 6" LED Housings and Trims

LB6LEDA Trims can be used to retrofit existing 6" incandescent housings or used in New Construction with LiteBox QuickLink housings. Performs like 65W BR30 or 18W compact fluorescent using only 13.5 watts of power.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty.	ENERGY STAR®
BG1477800	LB6LEDA10L30K WH	785235429337	LED, 6" Retrofit Trim, 3000K, 1000 LMS, White Reflector, 120V	●	●	●	●	1.5	8	●
BG1477900	LB6LEDA10L35K WH	785235429344	LED, 6" Retrofit Trim, 3500K, 1000 LMS, White Reflector, 120V	●	●	●		1.5	8	●
BG1443200	DBXQL	785235428989	LED, 6" Downlight Housing, New Construction, QuickLink, Dual labeled for IC/ Non-IC, 120V.	●	●	●	●	4.9	8	
BG1563400	DBXQL CP	785235431422	LED, 6" Downlight Housing, New Construction, QuickLink, Dual labeled for IC/ Non-IC, 120V, Chicago Plenum			●		5	8	

LiteBox® 6" LED Retrofit Trims

LiteBox 6" LED retrofit trims are designed to retrofit into existing Prescolite or competitive 6" housings or can be used for new construction with 6" LiteBox LED QuickLink housings.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty.	ENERGY STAR®
BG1576100	LB6A7L27K9 WH	785235431866	LED, 6" Downlight Retrofit Trim, 90 CRI, 2700K, 700 LMS, 10W, 10% dimming, White, 120V		●	●		1.05	8	●
BG1573900	LB6A7L30K9 WH	785235431736	LED, 6" Downlight Retrofit Trim, 90 CRI, 3000K, 700 LMS, 10W, 10% dimming, White, 120V		●	●		1.05	8	●
BG1574000	LB6A7L35K9 WH	785235431743	LED, 6" Downlight Retrofit Trim, 90 CRI, 3500K, 700 LMS, 10W, 10% dimming, White, 120V			●		1.05	8	●
BG1574100	LB6A7L40K9 WH	785235431750	LED, 6" Downlight Retrofit Trim, 90 CRI, 4000K, 700 LMS, 10W, 10% dimming, White, 120V			●		1.05	8	●
BG1576300	LBEB6A7L27K9 WH	785235431941	LED, 6" Downlight Eyeball Retrofit Trim, 90 CRI, 2700K, 700 LMS, 10W, 10% dimming, White, 120V			●		2	8	●
BG1574500	LBEB6A7L30K9 WH	785235431798	LED, 6" Downlight Eyeball Retrofit Trim, 90 CRI, 3000K, 700 LMS, 10W, 10% dimming, White, 120V			●		2	8	●
BG1574600	LBEB6A7L35K9 WH	785235431804	LED, 6" Downlight Eyeball Retrofit Trim, 90 CRI, 3500K, 700 LMS, 10W, 10% dimming, White, 120V			●		2	8	●

LiteBox® 6" LED Surface Downlights

LBS Series Surface Mount trims are designed for use in new construction to install to a standard 4x4 J-Box or for retrofit IC or Non-IC applications using an optional mounting kit.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty.	ENERGY STAR®
BG1602600	LBSLEDA10L27K9 WH	785235432726	LED, 7" Surface Mount Trim, 90 CRI, 2700K, 1000 LMS, White Relfector, 120V	●	●	●		1.2	8	●
BG1505100	LBSLEDA10L30K9 WH	785235430128	LED, 7" Surface Mount Trim, 90 CRI, 3000K, 1000 LMS, White Relfector, 120V	●	●	●		1.4	8	●
BG1602500	LBSLEDA10L35K9 WH	785235432719	LED, 7" Surface Mount Trim, 90 CRI, 3500K, 1000 LMS, White Relfector, 120V	●		●		1.2	8	●
BG1602400	LBSLEDA10L40K9 WH	785235432702	LED, 7" Surface Mount Trim, 90 CRI, 4000K, 1000 LMS, White Relfector, 120V	●		●		1.2	8	●
BG1535600	LBSMTGKIT	785235431064	Accessory, Mounting Kit, for LiteBox LED Surface Mount fixtures	●				0.4	8	

LiteBox® 6" LED Cylinder

- Fits LB6A7L, LB6LEDA10L, LBEB6 and CDL6 Trims
- 120V
- Wet/Damp Location Listed

10-Day Quick Ship Ordering Guide
Order Limit Per Fixture Selection: 50 Pieces or Less

HOUSING	MOUNTING	FINISH OPTIONS
LBC6 6" cylinder housing	W Wall Mount, Down	WH White
	P Pendant Mount	BL Black
	S Surface Mount	Z Zet
	CM Cord Mount	BA Brushed Aluminum
		BZ Bronze

LiteBox® 4" LED QuickLink Housings

Designed for use with LB4/LBEB4 LED retrofit trims with a mating QuickLink connector to provide a long life, energy saving solution in new construction applications.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty.
BG1473900	BX4QL-120	785235429375	4" housing, QuickLink LED, Non-IC, for new construction	●	●			2.5	6

10-Day Quick Ship Ordering Guide
Order Limit Per Fixture Selection: 50 Pieces or Less

HOUSING	VOLTAGE
IBX4QL 4" Air Shield, IC Rated New Construction LED Quick Link Housing	120 Line Voltage, 120V

LiteBox® 4" LED Retrofit Trims

LiteBox 4" LED retrofit trims are designed to retrofit into existing Prescolite or competitive 4" housings or can be used for new construction with 4" LiteBox LED QuickLink housings.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty.	ENERGY STAR®
BG1576000	LB4A6L27K9 WH	785235431828	LED, 4" Downlight Retrofit Trim, 90 CRI, 2700K, 600 LMS, 9W, 10% dimming, White, 120V			•		0.6	8	•
BG1573600	LB4A6L30K9 WH	785235431705	LED, 4" Downlight Retrofit Trim, 90 CRI, 3000K, 600 LMS, 9W, 10% dimming, White, 120V			•		0.6	8	•
BG1573700	LB4A6L35K9 WH	785235431712	LED, 4" Downlight Retrofit Trim, 90 CRI, 3500K, 600 LMS, 9W, 10% dimming, White, 120V			•		0.6	8	•
BG1573800	LB4A6L40K9 WH	785235431729	LED, 4" Downlight Retrofit Trim, 90 CRI, 4000K, 600 LMS, 9W, 10% dimming, White, 120V			•		0.6	8	•
BG1576200	LBEB4A6L27K9 WH	785235431903	LED, 4" Downlight Eyeball Retrofit Trim, 90 CRI, 2700K, 600 LMS, 9W, 10% dimming, White, 120V			•		1.05	8	•
BG1574200	LBEB4A6L30K9 WH	785235431767	LED, 4" Downlight Eyeball Retrofit Trim, 90 CRI, 3000K, 600 LMS, 9W, 10% dimming, White, 120V			•		1.05	8	•
BG1574300	LBEB4A6L35K9 WH	785235431774	LED, 4" Downlight Eyeball Retrofit Trim, 90 CRI, 3500K, 600 LMS, 9W, 10% dimming, White, 120V			•		1.05	8	•

CDL- 4", 5" or 6" LED Retrofit Trims

Designed for new construction or retrofit applications .4", 5" or 6" recessed downlight.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty.
BG1576800	CDL4-7L30KAWH	785235432047	LED, 4" Retrofit Trim, 90 CRI, 3000K, 700 LMS, White, 120V		•	•		0.52	8
BG1576900	CDL6-8L30KAWH	785235432054	LED, 6" Retrofit Trim, 90 CRI, 3000K, 800 LMS, White, 120V		•	•		0.96	8

LiteStep® LED Step Lights

- Suitable for wet locations
- IC Rated
- 120V-277V

10-Day Quick Ship Ordering Guide
Order Limit Per Fixture Selection: 50 Pieces or Less

ORDERING INFORMATION — EXAMPLE: MSLHL30K8 WH

HOUSING	COVER PLATE	LED COLOR	CRI	FINISH
MSL Mini Step Light	HL Horizontal Louver	30K 3000 Kelvin	8 80 CRI	WH White
	VL Vertical Louver	40K 4000 Kelvin		BL Black
	HH Horizontal Hood	50K 5000 Kelvin		BN Brushed Nickel
	VH Vertical Hood			AB Antique Bronze

Architrak® Track System

All Architrak® products are stocked except the following:

Catalog #	Description
AKTMNLED Series	LED, 2" Track Head Series, 120V
AKTMDLED Series	LED, 2-3/4" Track Head Series, 120V
AKTMLED Series	LED, 4" Track Head Series, 120V
AKTCLS Series	Track Current Limiter Device, 120V

ArchiTrak® 4" LED Track Head

- 2 SCDM Color Consistency
- 2500 Lumens
- 120V
- 10% Dimming

10-Day Quick Ship Ordering Guide
Order Limit Per Fixture Selection: 50 Pieces or Less

ORDERING INFORMATION — EXAMPLE: AKTMLED25L35K8XFL55BL

FIXTURE	OUTPUT	COLOR	CRI	BEAM SPREAD	FINISH
AKTMLED 4" LED Track Head	25L 2500 Delivered Lumens	27K 2700 Kelvin	8 80+ CRI	MD25 25 Degree Cutoff	BL Black
		30K 3000 Kelvin	9 90+ CRI	FL35 35 Degree Cutoff	WH White
		35K 3500 Kelvin		XFL55 55 Degree Cutoff	
		40K 4000 Kelvin			

HUBBELL®
Control Solutions

CX Lighting Control Panels

The CX Commercial Lighting Control Panel is a self-contained lighting control system that replaces conventional time clock and contactor combinations with a labor saving, simple and flexible module solution. CX provides a reliable standalone relay control solution to reduce energy consumption for small and intermediate size projects that are cost sensitive.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
CX082S083LM	CX082S083LM	64018120063	CX Lighting Control Panel, 8 Relay 120/277V Input, with 8-30A/1P Latching Relays NEMA 1 Surface Enclosure Master		●			24.2
CX162S163LM	CX162S163LM	640181200938	CX Lighting Control Panel, 16 Relay 120/277V Input, with 16-30A/1P Latching Relays NEMA 1 Surface Enclosure Master		●			39.45
CX242S243LM	CX242S243LM	640181201058	CX Lighting Control Panel, 24 Relay 120/277V Input, with 24-30A/1P Latching Relays NEMA 1 Surface Enclosure Master		●			41.7
CXDIMCONTRBD	CXDIMCONTRBD	64018170163	CX Lighting Control Panel 8-Channel Dimming Controller Option Board		●			0.5
CXPBAR	CXPBAR	64018170164	CX Lighting Control Panel Relay Channel Barrier		●			0.21
CXR3LEM	CXR3LEM	640181729330	CX Emergency Relay, 30Amp, 1P Latching, 120/277/347VAC			●		0.21
CXSW-1-LA	CXSW-1-LA	640181712189	CX Low Voltage, 1 Button, Programmable Switch, No Pilot, Light Almond			●		0.21
CXSW-1-WH	CXSW-1-WH	640181712080	CX Low Voltage, 1 Button, Programmable Switch, No Pilot, White		●			0.21
CXSW-2-WH	CXSW-2-WH	640181712097	CX Low Voltage, 2 Button, Programmable Switch, No Pilot, White		●			0.21
CXSW-3-LA	CXSW-3-LA	640181712202	CX Low Voltage, 3 Button, Programmable Switch, No Pilot, Light Almond			●		0.21
CXSW-3-WH	CXSW-3-WH	640181712103	CX Low Voltage, 3 Button, Programmable Switch, No Pilot, White		●	●		0.21
CXSW-4-IV	CXSW-4-IV	640181712165	CX Low Voltage, 4 Button, Programmable Switch, No Pilot, Ivory			●		0.21
CXSW-4-WH	CXSW-4-WH	640181712110	CX Low Voltage, 4 Button, Programmable Switch, No Pilot, White		●	●		0.21
CXSW-6-GY	CXSW-6-GY	640181712271	CX Low Voltage, 6 Button, Programmable Switch, No Pilot, Gray			●		0.21
CXSW-6-IV	CXSW-6-IV	640181712172	CX Low Voltage, 6 Button, Programmable Switch, No Pilot, Ivory			●		0.21
CXSW-6-WH	CXSW-6-WH	640181712127	CX Low Voltage, 6 Button, Programmable Switch, No Pilot, White		●	●		0.21

Daylight Harvesting Controls

Daylight Harvesting Controls include photo sensors for standalone and network solutions utilizing HCS controls. Open and Close loop photo sensors are available in indoor and outdoor options.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
DLC7	DLC7	640181404619	Continuous Dimming Daylighting Control for 0-10V Dimming Ballasts, White				●	0.45
LUXSTATLS	LUXSTATLS	640181801739	Photosensor, Indoor, CX and NX Control Modules, 3 to 6000 FC Ranges, White			●		0.5
LUXSTATLSO	LUXSTATLSO	640181801784	Photosensor, Outdoor, CX and NX Control Modules, 3 to 6000 FC Ranges, White			●		0.2

Emergency Lighting Units

Hubbell Control Solutions Emergency Relays include UL924 applications for shunt or bypass and UL1008 applications for local transfer for 0-10V dimming applications.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
ALCR1277	ALCR1277	640181500038	UL924 Automatic Load Control Relay			●		0.5
UL1008BCELTS1277	UL1008BCELTS1277	640181724120	UL1008 Branch Circuit Transfer Switch, 120/277			●		11.125
UL924EPC1D-UNV	UL924EPC1D-UNV	640181716873	Emergency Load Control UL924 for Dimming			●		0.41

NX Distributed Intelligence™ Lighting Controls

The NX Distributed Intelligence™ platform delivers a seamless lighting control solution for both indoor and outdoor spaces. NX is capable of scaling from standalone fixture and room control applications to networked building deployments. NX operates using wired, wireless and hybrid connectivity with native BACnet™ support.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
NXAC-120-001	NXAC-120-001	640181710529	NX Area Controller, NEMA 1, HubbNET™, BACnet, 120V			●		0.5
NXAVM	NXAVM	640181720146	NX Audio Visual Interface Module			●		0.5
NXBTC	NXBTC	640181723000	NX Bluetooth® Radio Bridge, Real Time Clock, Password Protection, Blue			●		0.2
NXCI	NXCI	640181716965	NX Contact Closure Interface Module			●		1
NXDS	NXDS	640181713384	NX Daylight Sensor		●	●	●	1
NXDS-O	NXDS-O	640181713377	NX Daylight Sensor Outdoor		●	●		1
NXHDI	NXHDI	640181710567	NX device network interface module, DIN rail mount			●		1
NXHNB2	NXHNB2	640181723314	NX network bridge module			●		1
NXOFM-1R1D-UNV	NXOFM-1R1D-UNV	640181721815	NX On-Fixture Module, 1 Relay 1 Dimmer, 120-480V			●		0.5
NXOS-LODT	NXOS-LODT	640181710840	NX Wall mount Sensor, PIR/Ultrasonic, 1600 Sq. Ft.		●	●		0.5
NXOS-LODTR	NXOS-LODTR	640181710857	NX Wall mount Sensor, PIR/Ultrasonic, 1600 Sq. Ft., Form C Relay		●	●		0.5
NXOS-OMDT1	NXOS-OMDT1	640181710680	NX Ceiling mount, PIR/Ultrasonic, 180°, 1000 Sq. Ft.		●			0.5
NXOS-OMDT1R	NXOS-OMDT1R	640181710697	NX Ceiling mount, PIR/Ultrasonic, 180°, 1000 Sq. Ft., form C relay		●			0.5
NXOS-OMDT2	NXOS-OMDT2	640181710666	NX Ceiling mount, PIR/Ultrasonic, 180°, 2000 Sq. Ft.		●	●	●	0.5
NXOS-OMDT2R	NXOS-OMDT2R	640181710673	NX Ceiling Occupancy Sensor, PIR/Ultrasonic, 2000 Sq. Ft. with Relay		●	●	●	0.5
NXOS-OMDT5	NXOS-OMDT5	640181710703	NX Ceiling mount, PIR/Ultrasonic, 180°, 500 Sq. Ft.		●	●		0.5
NXOS-OMDT5R	NXOS-OMDT5R	640181710710	NX Ceiling mount, PIR/Ultrasonic, 180°, 500 Sq. Ft., form C relay		●	●		0.5

NX Distributed Intelligence™ Lighting Controls (continued)

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
NXOS-OMUS2	NXOS-OMUS2	640181710727	NX Ceiling Occupancy Sensor, Ultrasonic, 2000 Sq. Ft.			●		0.5
NXOS-OMUS2R	NXOS-OMUS2R	640181710734	NX Ceiling Occupancy Sensor, Ultrasonic, 2000 Sq. Ft. with Relay		●	●		0.5
NXP08-2-083L-S	NXP08-2-083L-S	640181711830	NX Panel, 08 Relays, 30A Latch, 120/277V SRF		●			21
NXP16-2-163L-S	NXP16-2-163L-S	640181711854	NX Panel, 16 Relays, 30A Latch, 120-277V SRF		●			21
NXP24-2-243L-S	NXP24-2-243L-S	640181711878	NX Panel, 24 Relays, 30A Latch, 120-277V SRF		●			21
NXP32-2-323L-S	NXP32-2-323L-S	640181711892	NX Panel, 32 Relays, 32-30A/1P Latch, 120-277V SRF		●			21
NXP48-2-483L-S	NXP48-2-483L-S	640181711915	NX Panel, 48 Relays, 30A Latch, 120-277V SRF		●			21
NXP-DIM8	NXP-DIM8	640181713391	NX Dimming Controller Board, 8-channels, 100mA per channel		●	●		0.5
NXPBAR	NXPBAR	640181721778	Relay Barrier, Wired, Gray		●			0.9
NXRC-1R-UNV	NXRC-1R-UNV	640181710420	NX Room Controller, 1 Relay, Universal Voltage		●	●		1
NXRC2-1RD-UNV	NXRC2-1RD-UNV	640181724830	NX Room Controller, 1 Relay, 0 - 10V Dimming, Power Monitoring, Universal Voltage		●	●	●	1
NXRC2-2RD-UNV	NXRC2-2RD-UNV	640181724847	NX Room Controller, 2 Relay, 0 - 10V Dimming, Power Monitoring, Universal Voltage		●	●	●	1
NXRC-2R-UNV	NXRC-2R-UNV	640181710444	NX Room Controller, 2 Relay, Universal Voltage		●	●		1
NXRC-UL924-UNV	NXRC-UL924-UNV	640181727275	NX Emergency Lighting Room Controller, 1 Relay, 0-10V Dimming, One Color Channel, Universal Voltage			●		1
NXRCFX-1RD-UNV	NXRCFX-1RD-UNV	640181727466	NX Room Controller, FX Bus Compatible, 1 SPST Switched, One 0-10VDC Dimming Output		●	●	●	1
NXRCFX-2RD-UNV	NXRCFX-2RD-UNV	640181727251	NX Room Controller, FX Bus Compatible, 2 SPST Switched, Two 0-10VDC Dimming Output		●	●	●	1
NXRO	NXRO	640181716972	NX Occupancy Output Interface		●			0.5
NXSP	NXSP	640181710628	NX SmartPORT™ Module, 4 SmartPORTs, 8 RJ45 connectors, DIN rail mount			●		0.5
NXSW-TH3-WH	NXSW-TH3-WH	640181723956	NX Switch Station, 3.5" Touch Screen Wall Station, White			●		0.5
NXWPS	NXWPS	640181724823	NX Wall Partition Sensor Module, with Reflector			●		1
RJ45ADAPTER	RJ45ADAPTER	640181700094	Pigtail to Cat5 adapter			●		0.2
NXRJSPLITTER	NXRJSPLITTER	640181713407	NX RJ45 Splitter, 2-way Female for Cat5			●		0.5

Cables

Hubbell Control Solutions Network System Cables are plenum rated, Cat5 cables that can be used with the NX Distributed Intelligence™ lighting control system and CX Panels.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
CAT5-3IN-OR-PLENUM	CAT5-3IN-OR-PLENUM	640181727305	Cat5 cable, 3 in., Orange, Plenum Rated			●		0.2
CAT5-3F-OR-PLENUM	CAT5-3F-OR-PLENUM	640181727312	Cat5 cable, 3 ft., Orange, Plenum Rated			●		0.2
CAT5-25F-OR-PLENUM	CAT5-25F-OR-PLENUM	640181727329	Cat5 cable, 25 ft., Orange, Plenum Rated			●		2
CAT5-10F-OR-PLENUM	CAT5-10F-OR-PLENUM	640181727336	Cat5 cable, 10 ft., Orange, Plenum Rated			●		1
CAT5-50F-OR-PLENUM	CAT5-50F-OR-PLENUM	640181727343	Cat5 cable, 50 ft., Orange, Plenum Rated			●		4
CAT5-100F-OR-PLENUM	CAT5-100F-OR-PLENUM	640181727350	Cat5 cable, 100 ft., Orange, Plenum Rated			●		5

OMNI® Low Voltage Dual Technology Occupancy/Vacancy Ceiling Sensors

The OMNI Ceiling Mount Occupancy/Vacancy Sensor is designed for medium to large spaces with ceilings up to 12' in height. The sensor is available with Ultrasonic and Passive Infrared technology for unequaled motion detection. Embedded smart IntelliDAPT® technology eliminates false triggers. The sensor has 500-2,000 square foot coverage area, depending on the model.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
OMNIDT1000BP1277	OMNIDT1000BP1277	640181411938	OMNI-BP Passive Infrared & Ultrasonic Ceiling Sensor with IntelliDAPT, 180º, 1000 Sq. Ft., Line- Voltage, 120/277VAC, White		●	●		1
OMNIDT2000BP1277	OMNIDT2000BP1277	640181411945	OMNI-BP Passive Infrared & Ultrasonic Ceiling Sensor with IntelliDAPT, 360º, 2000 Sq. Ft., Line- Voltage, 120/277VAC, White		●	●		1
OMNIDT1000	OMNIDT1000	640181402769	OMNI Passive Infrared & Ultrasonic Ceiling Sensor with IntelliDAPT, 180º, 1000 Sq. Ft., White		●	●	●	0.5
OMNIDT1000RP	OMNIDT1000RP	640181402813	OMNI Passive Infrared & Ultrasonic Ceiling Sensor with IntelliDAPT, 180º, 1000 Sq. Ft., Relay & Photocell, White		●	●	●	0.5
OMNIDT2000	OMNIDT2000	640181402868	OMNI Passive Infrared & Ultrasonic Ceiling Sensor with IntelliDAPT, 360º, 2000 Sq. Ft., White		●	●	●	0.5
OMNIDT2000RP	OMNIDT2000RP	640181402912	OMNI Passive Infrared & Ultrasonic Ceiling Sensor with IntelliDAPT, 360º, 2000 Sq. Ft., Relay & Photocell, White		●	●	●	0.5
OMNIDT500	OMNIDT500	640181402660	OMNI Passive Infrared & Ultrasonic Ceiling Sensor with IntelliDAPT, 180º, 500 Sq. Ft., White		●	●		0.5
OMNIDT500RP	OMNIDT500RP	640181402714	OMNI Passive Infrared & Ultrasonic Ceiling Sensor with IntelliDAPT, 180º, 500 Sq. Ft., Relay & Photocell, White		●	●		0.5
OMNIIR	OMNIIR	640181403261	OMNI Passive Infrared Ceiling Sensor with IntelliDAPT, 360º, 450 Sq. Ft., White		●	●		0.5
OMNIIRL	OMNIIRL	640181403360	OMNI Passive Infrared Ceiling Sensor with IntelliDAPT, 360º, 1500 Sq. Ft., White		●	●		0.5
OMNIIRLRP	OMNIIRLRP	640181403414	OMNI Passive Infrared Ceiling Sensor with IntelliDAPT, 360º, 1500 Sq. Ft., Relay & Photocell, White		●	●		0.5
OMNIUS2000	OMNIUS2000	640181403162	OMNI Ultrasonic Ceiling Sensor with IntelliDAPT, 360º, 2000 Sq. Ft., White		●	●		0.5
OMNIUS2000RP	OMNIUS2000RP	640181403216	OMNI Ultrasonic Ceiling Sensor with IntelliDAPT, 360º, 2000 Sq. Ft., Relay & Photocell, White		●	●		0.5

HUBBELL®
Control Solutions

Low Profile Passive Infrared Ceiling Sensor

The PIR10 uses passive infrared (PIR) technology to turn lighting on and off based on occupancy. Designed specifically for areas with long-range major-motion activity, the PIR10 provides a long-term trouble-free operation. The sensor design is both visually pleasing and physically compact.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
PIR10P	PIR10P	640181301154	Passive Infrared Line Voltage Ceiling Sensor			●		0.5

WASP Fixture Sensor

The WASP Fixture Sensor is specifically designed for ON/OFF and 0-10V dimming control of high mount/low mount fixtures in warehouses, distribution centers and similar facilities. The sensor is available in end mount and surface mount versions. Also available in an IP65 version.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
WSPADAPTOR2	WSPADAPTOR2	640181500533	WASP Sensor Offset Adaptor			●		0.5
WSPEM24V	WSPEM24V	640181200877	WASP Sensor with Daylighting, End Mount, 1 SPST Output, 24VDC, White			●		0.5
WSPEMUNV	WSPEMUNV	640181200839	WASP Sensor with Daylighting, End Mount, 1 SPST Output, 120/277/347VAC, White		●	●	●	0.5
WSPEMUNV-360-KIT	WSPEMUNV-360-KIT	640181713339	WASP Sensor Kit		●			1
WSPSM24V	WSPSM24V	640181200457	WASP Sensor with Daylighting, Surface Mount, 1 SPST Output, 24VDC, White		●			0.5
WSPSMUNV	WSPSMUNV	640181200419	WASP Sensor with Daylighting, Surface Mount, 1 SPST Output, 120/277/347VAC, White		●			0.5
WSPDBEMUNV	WSPDBEMUNV	640181728579	WASP Bluetooth® Sensor with Daylighting, End Mnt, 0-10V Dimming, 1 SPST Output, 120-480VAC, White			●		0.4
WSPDBSMUNV	WSPDBSMUNV	640181728630	WASP Bluetooth® Sensor with Daylighting, Surface Mnt, 0-10V Dimming, 1 SPST Output, 120-480VAC, White			●		0.4
WSPDBSM24V	WSPDBSM24V	640181728609	WASP Bluetooth® Sensor with Daylighting, Surface Mnt, 0-10V Dimming, 24VDC (Pwr Supply Reqd), White			●		0.4
WSPDEM24V	WSPDEM24V	640181723468	WASP Dimming Sensor, 0-10V, End Mount, 24VDC, White			●		0.5
WSPDEMUNV	WSPDEMUNV	640181723529	WASP Dimming Sensor, 0-10V, End Mount, 120-480VAC, White			●		0.5
WSPDSM24V	WSPDSM24V	640181723581	WASP Dimming Sensor, 0-10V, Surface Mount, 24VDC, White			●		0.5
WSPDSMUNV	WSPDSMUNV	640181723642	WASP Dimming Sensor, 0-10V, Surface Mount, 120-480VAC, White			●		0.5
WSP-L360-LM-WH	WSP-L360-LM-WH	640181708359	WASP Sensor Lens, Low Mount, 360º Coverage Area, White		●			0.2
WSP-L360-WH	WSP-L360-WH	640181708298	WASP Sensor Lens, High Mount, 360º Coverage Area, White		●			0.2
WSP-LA-LM-WH	WSP-LA-LM-WH	640181708441	WASP Sensor Lens, Low Mount, Aisle Coverage Area, White		●			0.2
WSP-LA-WH	WSP-LA-WH	640181708380	WASP Sensor Lens, High Mount, Aisle Coverage Area, White		●			0.2

WASP Fixture Sensor (continued)

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
WSPLWOEMUNV	WSPLWOEMUNV	640181719096	WASP High Bay Sensor with Daylighting, End Mount, 1 SPST Output, 120/277/347VAC, Low Temp, Water Tight, Indoor-Outdoor, White		●			0.5
WSPLWOSM24V	WSPLWOSM24V	640181719621	WASP High Bay Sensor with Daylighting, Surface Mount, 1 SPST Output, 24VDC, Low Temp, Water Tight, Indoor-Outdoor, White		●			0.5
WSPLWOSMUNV	WSPLWOSMUNV	640181719867	WASP High Bay Sensor with Daylighting, Surface Mount, 1 SPST Output, 120/277/347VAC, Low Temp, IP65, White		●			0.5
WSPDLWOBSM24V	WSPDLWOBSM24V	640181729477	WASP Bluetooth® Sensor with Daylighting, LowTemp/Watertight/ Outdoor, Surface Mnt, 0-10V Dimming, 24VDC (Pwr Supply Reqd), White			●		0.4
WSPDLWOEMUNV	WSPDLWOEMUNV	640181723765	WASP Dimming Sensor, 0-10V, Low Temp, Watertight, Indoor/Outdoor, End Mount, 120-480VAC, White			●		0.5
WSPDLWOSM24V	WSPDLWOSM24V	640181723826	WASP Dimming Sensor, 0-10V, Low Temp, Watertight, Indoor/Outdoor, Surface Mount, 24VDC, White			●		0.5
WSPDLWOSMUNV	WSPDLWOSMUNV	640181723888	WASP Dimming Sensor, 0-10V, Low Temp, Watertight, Indoor/Outdoor, Surface Mount, 120-480VAC, White			●		0.5
WSPLWO-L180-LM-WH	WSPLWO-L180-LM-WH	640181719539	WASP Sensor Lens, Low Mount, 180º Coverage Area, Low Temp, IP65, White		●			0.2
WSPLWO-L180-WH	WSPLWO-L180-WH	640181718488	WASP Sensor Lens, High Mount, 180º Coverage Area, Low Temp, IP65, White		●			0.2
WSPLWO-L360-LM-WH	WSPLWO-L360-LM-WH	640181718518	WASP Sensor Lens, Low Mount, 360º Coverage Area, Low Temp, IP65, White		●			0.2
WSPLWO-L360-WH	WSPLWO-L360-WH	640181718549	WASP Sensor Lens, High Mount, 360º Coverage Area, Low Temp, IP65, White		●			0.2

LightHAWK® Wall Switch Sensors

LightHAWK sensors combine state-of-the-art technology to provide precise control of lighting loads within small to medium sized areas. With the choice of either Manual-ON (Vacancy Sensor) or Automatic-ON (Occupancy Sensor), these energy-saving sensors are designed to control a broad range of lighting fixtures and ensure that lights will turn OFF automatically when motion is no longer detected. All LightHAWK sensors are designed to fit in standard decorator style wall plates.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
LHIRS0-G-WH	LHIRS0-G-WH	640181900371	LightHAWK Passive Infrared, Single Relay, No Button, Ground 120/277V, White, Switchable Vacancy or Occupancy Mode		●			0.5
LHIRS1-G-GY	LHIRS1-G-GY	640181900623	LightHAWK Passive Infrared, Single Relay, 1 Button, Ground 120/277V, Gray, Switchable Vacancy or Occupancy Mode		●	●		0.5
LHIRS1-G-IV	LHIRS1-G-IV	640181900647	LightHAWK Passive Infrared, Single Relay, 1 Button, Ground 120/277V, Ivory, Switchable Vacancy or Occupancy Mode		●	●		0.5
LHIRS1-G-LA	LHIRS1-G-LA	640181900715	LightHAWK Passive Infrared, Single Relay, 1 Button, Ground 120/277V, Light Almond, Switchable Vacancy or Occupancy Mode		●	●		0.5
LHIRS1-G-WH	LHIRS1-G-WH	640181900739	LightHAWK Passive Infrared, Single Relay, 1 Button, Ground 120/277V, White, Switchable Vacancy or Occupancy Mode		●	●		0.5
LHIRS1-N-GY	LHIRS1-N-GY	640181900838	LightHAWK Passive Infrared, Single Relay, 1 Button, Neutral 120/277V, Gray, Switchable Vacancy or Occupancy Mode		●			0.5
LHIRS1-N-WH	LHIRS1-N-WH	640181900913	LightHAWK Passive Infrared, Single Relay, 1 Button, Neutral 120/277V, White, Switchable Vacancy or Occupancy Mode		●	●		0.5
LHMTS0-G-WH	LHMTS0-G-WH	640181903587	LightHAWK Dual Technology, Single Relay, No Button, Ground 120/277V, White, Switchable Vacancy or Occupancy Mode		●	●		0.5
LHMTS1-24V-WH	LHMTS1-24V-WH	640181701602	LightHAWK Dual Technology, Single Relay, 1 Button, Low Voltage, White, Switchable Vacancy or Occupancy Mode		●	●		0.5
LHMTS1-G-GY	LHMTS1-G-GY	640181903778	LightHAWK Dual Technology, Single Relay, 1 Button, Ground 120/277V, Gray, Switchable Vacancy or Occupancy Mode		●	●		0.5
LHMTS1-G-IV	LHMTS1-G-IV	640181903792	LightHAWK Dual Technology, Single Relay, 1 Button, Ground 120/277V, Ivory, Switchable Vacancy or Occupancy Mode		●	●		0.5

LightHAWK® Wall Switch Sensors (continued)

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
LHMTS1-G-LA	LHMTS1-G-LA	640181903815	LightHAWK Dual Technology, Single Relay, 1 Button, Ground 120/277V, Light Almond, Switchable Vacancy or Occupancy Mode		●	●		0.5
LHMTS1-G-WH	LHMTS1-G-WH	640181903839	LightHAWK Dual Technology, Single Relay, 1 Button, Ground 120/277V, White, Switchable Vacancy or Occupancy Mode		●	●	●	0.5
LHMTS1-G-WH-M	LHMTS1-G-WH-M	640181705280	LightHAWK Dual Technology, Single Relay, 1 Button, Ground 120/277V, White, Vacancy Mode Only		●			0.5
LHMTS1-N-IV	LHMTS1-N-IV	640181903891	LightHAWK Dual Technology, Single Relay, 1 Button, Neutral 120/277V, Ivory, Switchable Vacancy or Occupancy Mode		●	●		0.5
LHMTS1-N-WH	LHMTS1-N-WH	640181903938	LightHAWK Dual Technology, Single Relay, 1 Button, Neutral 120/277V, White, Switchable Vacancy or Occupancy Mode		●	●		0.5
LHUSS1-G-WH	LHUSS1-G-WH	640181601933	LightHAWK Ultrasonic Technology, Single Relay, 1 Button, Ground 120/277V, White, Switchable Vacancy or Occupancy Mode		●	●		0.5
LHDCIRD0-G-WH	LHDCIRD0-G-WH	640181715258	LightHAWK Passive Infrared, Dual Circuit, No Buttons, Ground 120/277V, White, Switchable Vacancy or Occupancy Mode		●			0.5
LHDCIRD2-G-WH	LHDCIRD2-G-WH	640181715432	LightHAWK Passive Infrared, Dual Circuit, Two Buttons, Ground 120/277V, White, Switchable Vacancy or Occupancy Mode		●			0.5
LHDCIRD2-N-WH	LHDCIRD2-N-WH	640181714534	LightHAWK Passive Infrared, Dual Circuit, Two Buttons, Neutral 120/277V, White, Switchable Vacancy or Occupancy Mode		●			0.5
LHDCMTD2-G-WH	LHDCMTD2-G-WH	640181715739	LightHAWK Dual Technology, Dual Circuit, Two Buttons, Ground 120/277V, White, Switchable Vacancy or Occupancy Mode		●	●		0.5
LHDCMTD2-N-WH	LHDCMTD2-N-WH	640181714831	LightHAWK Dual Technology, Dual Circuit, Two Buttons, Neutral120/277V, White, Switchable Vacancy or Occupancy Mode		●			0.5
LHDMIRS3-N-IV	LHDMIRS3-N-IV	640181724410	LightHawk Dimmer Passive Infrared Wall Switch Sensor with IntelliDAPT, Single Circuit, Three Buttons, 120/277VAC, 1000 Sq. Ft., Photocell, Ivory			●		0.5
LHDMIRS3-N-WH	LHDMIRS3-N-WH	640181724496	LightHawk Dimmer Passive Infrared Wall Switch Sensor with IntelliDAPT, Single Circuit, Three Buttons, 120/277VAC, 1000 Sq. Ft., Photocell, White			●		0.5
LHDMMTS2-N-GY	LHDMMTS2-N-GY	640181724564	LightHAWK Dimming Dual Technology, Single Relay, 2 Button, 120/277V, Gray, Switchable Vacancy or Occupancy Mode			●		0.5
LHDMMTS2-N-GY-M	LHDMMTS2-N-GY-M	640181724571	LightHAWK Dimming Dual Technology, Single Relay, 2 Button, 120/277V, Gray, Vacancy Mode Only			●		0.5
LHDMMTS2-N-IV	LHDMMTS2-N-IV	640181724601	LightHAWK Dimming Dual Technology, Single Relay, 2 Button, 120/277V, Ivory, Switchable Vacancy or Occupancy Mode			●		0.5
LHDMMTS2-N-IV-M	LHDMMTS2-N-IV-M	640181724618	LightHAWK Dimming Dual Technology, Single Relay, 2 Button, 120/277V, Ivory, Vacancy Mode Only			●		0.5
LHDMMTS2-N-WH	LHDMMTS2-N-WH	640181724687	LightHAWK Dimming Dual Technology, Single Relay, 2 Button, 120/277V, White, Switchable Vacancy or Occupancy Mode			●		0.5
LHDMMTS2-N-WH-M	LHDMMTS2-N-WH-M	640181724694	LightHAWK Dimming Dual Technology, Single Relay, 2 Button, 120/277V, White, Vacancy Mode Only			●		0.5
LHL-IRS1-G-WH	LHL-IRS1-G-WH	640181708861	LightHAWK LHL Series Passive Infrared Wall Switch Sensor, Single Circuit, One Button, Ground, 120/277VAC, 1000 Sq. Ft., Photocell, White			●		0.31
LHL-IRS1-G-IV	LHL-IRS1-G-IV	640181708847	LightHAWK LHL Series Passive Infrared Wall Switch Sensor, Single Circuit, One Button, Ground, 120/277VAC, 1000 Sq. Ft., Photocell, Ivory			●		0.31
LHL-IRS1-G-WH-M	LHL-IRS1-G-WH-M	640181708816	LightHAWK LHL Series Passive Infrared Wall Switch Vacancy Sensor, Single Circuit, One Button, Ground, 120/277VAC, 1000 Sq. Ft., Photocell, White			●		0.31
LHL-IRS1-G-IV-M	LHL-IRS1-G-IV-M	640181709714	LightHAWK LHL Series Passive Infrared Wall Switch Vacancy Sensor, Single Circuit, One Button, Ground, 120/277VAC, 1000 Sq. Ft., Photocell, Ivory			●		0.31

LightOWL® Dual Technology Ultrasonic and PIR

The LightOWL® Ceiling and Wall Mount Sensors provide precise control of lighting within a broad range of commercial and industrial applications. The sensor automatically turns the lights on when occupant enters the room and off when the space is unoccupied. LightOWL® occupancy / vacancy sensors are an ideal solution for areas where traditional ceiling sensors are not suitable.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
LODT	LODT	640181402264	LightOWL Passive Infrared & Ultrasonic Wall Sensor with IntelliDAPT, 1600 Sq. Ft.		●	●		0.5
LODTRP	LODTRP	640181402318	LightOWL Passive Infrared & Ultrasonic Wall Sensor with IntelliDAPT, 1600 Sq. Ft., Relay & Photocell		●	●		0.5
LOIRHB	LOIRHB	640181402462	LightOWL Passive Infrared Wall Sensor with IntelliDAPT, High Bay		●			0.5
LOIRWV	LOIRWV	640181402363	LightOWL Passive Infrared Wall Sensor with IntelliDAPT, 2500 Sq. Ft.		●			0.5
LOIRWVRP	LOIRWVRP	640181402417	LightOWL Passive Infrared Wall Sensor with IntelliDAPT, 2500 Sq. Ft., Relay & Photocell		●	●		0.5
WGLO	WGLO	640181404015	Wall mount wire guard for LightOWL sensors			●		1

Power Packs and Controlled Relays

Hubbell Control Solutions Power Packs, Relays and Controlled Receptacles are self-contained devices that provide ON/OFF circuit control and are designed to work with low-voltage occupancy sensors.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
MPSA	MPSA	640181403711	Auxiliary Relay Device		●	●		0.5
PHDIM-1277	PHDIM-1277	640181721013	Reverse Phase Dimming Converter, 0-10VDC Controller to 110-120VAC, 277VAC		●			0.5
RRU120	RRU120	640181900500	Auxiliary Relay for 120V Line Voltage Sensors			●		0.5
RRU277	RRU277	640181900555	Auxiliary Relay for 277V Line Voltage Sensors		●	●		0.5
UVPP	UVPP	640181801685	Universal Voltage Power Pack, 100-277 VAC		●	●	●	0.5
UVPPHD	UVPPHD	640181720221	Universal Voltage Power Pack (Heavy Duty), 100-277 VAC		●	●		0.5
UVPPM	UVPPM	640181801678	Universal Voltage Power Pack with Manual ON/OFF Control, 100-277 VAC		●	●		0.5
HCSREC-F-15A-WH	HCSREC-F-15A-WH	640181728364	Controlled Receptacle, Full Control, 15 Amps, White			●		0.5
HCSREC-F-20A-WH	HCSREC-F-20A-WH	640181729309	Controlled Receptacle, Full Control, 20 Amps, White			●		0.5
HCSREC-S-15A-WH	HCSREC-S-15A-WH	640181728296	Controlled Receptacle, Split Control, 15 Amps, White			●		0.5
HCSREC-S-20A-WH	HCSREC-S-20A-WH	640181728432	Controlled Receptacle, Split Control, 20 Amps, White			●		0.5

HUBBELL®
Control Solutions

Wallbox Devices

Hubbell Control Solutions Wallbox Devices include low voltage dimmer switches, momentary and latching switches, and digital timers making them the perfect solution for HCS low voltage occupancy sensors, daylighting controls and networked lighting control panels.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
LVSD-L-3-IV	LVSD-L-3-IV	640181723079	Low Voltage Switch, Latching, 3 Button, w/Pilot LED, Raise-On/Off-Lower, 0-10V Control, 100mA, Ivory			●		0.2
LVSD-L-3-WH	LVSD-L-3-WH	640181723093	Low Voltage Switch, Latching, 3 Button, w/Pilot LED, Raise-On/Off-Lower, 0-10V Control, 100mA, White			●		0.2
LVSD-M-3-GY	LVSD-M-3-GY	640181723024	Low Voltage Switch, Momentary, 3 Button, w/Pilot LED, Raise-On/Off-Lower, 0-10V Control, 100mA, Gray			●		0.2
LVSD-ML-4-GY	LVSD-ML-4-GY	640181723109	Low Voltage Switch, 1-Momentary and 1-Latching, 4 Button, w/Pilot LED, Raise-On/Off-Lower, 0-10V Control, 100mA, Gray			●		0.2
LVSKEY-3M-SS	LVSKEY-3M-SS	640181724137	Low Voltage Switch, Key Switch			●		0.2
LVSL2NPWH	LVSL2NPWH	640181100238	Low Voltage Switch, Latching, 2 Button, No Pilot, White		●			0.2
LVSM1NPLA	LVSM1NPLA	640181400642	Low Voltage Switch, Momentary, 1 Button, No Pilot, Light Almond		●			0.2
LVSM2NPG	LVSM2NPG	640181703040	Low Voltage Switch, Momentary, 2 Buttons, No Pilot, Gray			●		0.2
LVSD-M-3-IV	LVSD-M-3-IV	640181723031	Low Voltage Switch, Momentary, 3 Button, w/Pilot LED, Raise-On/Off-Lower, 0-10V Control, 100mA, Ivory			●		0.2
LVSD-M-3-WH	LVSD-M-3-WH	640181723055	Low Voltage Switch, Momentary, 3 Button, w/Pilot LED, Raise-On/Off-Lower, 0-10V Control, 100mA, White			●		0.2
LVSL1NPWH	LVSL1NPWH	640181100214	Low Voltage Switch, Latching, 1 Button with Pilot LED, White		●			0.2
LVSM1NPG	LVSM1NPG	640181703002	Low Voltage Switch, 1 Button, Momentary, No Pilot, Gray		●	●		0.2
LVSM1NPIV	LVSM1NPIV	640181100245	Low Voltage Switch, 1 Button, Momentary, No Pilot, Ivory		●	●		0.2
LVSM1NPWH	LVSM1NPWH	640181100269	Low Voltage Switch, 1 Button, Momentary, No Pilot, White		●	●		0.2
LVSM1PLWH	LVSM1PLWH	640181100375	Low Voltage Switch, Momentary, 1 Button, with Pilot LED, White		●	●		0.2
LVSM2NPIV	LVSM2NPIV	640181100276	Low Voltage Switch, Momentary, 2 Button, No Pilot, Ivory		●			0.2
LVSM2NPWH	LVSM2NPWH	640181100283	Low Voltage Switch, Momentary, 2 Button, No Pilot, White		●	●		0.2
LVSM2PLWH	LVSM2PLWH	640181100399	Low Voltage Switch, Momentary, 2 Button, with Pilot LED, White		●	●		0.2
LVSM3NPWH	LVSM3NPWH	640181101693	Low Voltage Switch, 3 Button, Momentary, No Pilot, White		●	●		0.2
LVSM4NPWH	LVSM4NPWH	640181101730	Low Voltage Switch, 4 Button, Momentary, No Pilot, White		●	●		0.2
LVSM4PLWH	LVSM4PLWH	640181101747	Low Voltage Switch, 4 Button, Momentary, with Pilot LED, White		●	●		0.2
RSD710-UNV-WVL	RSD710-UNV-WVL	640181726971	1200VA @ 120V AC, 1500VA @ 277 AC, 0-10V			●		
RSDM10-120-WVL	RSDM10-120-WVL	640181726988`	1000VA @ 120V AC MLV, 1000Q @120V AC, 450W @ 120V AC Dimmable LED and CFL, 0-10V			●		
RSDE06-120-WVL	RSDE06-120-WVL	640181726995	600VA @ 120V AC, Electronic Low Voltage, 300W @ 120V AC Dimmable LED and CFL, 0-10V			●		
RSDL06-UNV-WVL	RSDL06-UNV-WVL	640181727008	600W @120V AC Incandescent, 300W @ 120V AC Dimmable LED and CFL, 0-10V			●		

Wallbox Devices (continued)

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
PSD710-UNV-WVL	PSD710-UNV-WVL	64081727152	1200-1500VA @120/277V AC, 0-10V			●		
TD300	TD300	640181700001	Digital Programmable Timer, 120/230/277 VAC, White		●	●		0.2

wiSCAPE® Lighting Controls

The wiSCAPE outdoor lighting management system delivers wireless control solutions to maximize energy savings and enhance safety for parking lots to campuses and cities. With a fully integrated, end-to-end platform and robust software suite to manage, monitor and measure lighting assets, wiSCAPE provides an immediate path to improved operational efficiencies.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
WIR-GATEWAY3	WIR-GATEWAY3	640181718464	wiSCAPE Interface, Wireless			●		21
WIR-GATEWAY3-CM	WIR-GATEWAY3-CM	640181718465	wiSCAPE Interface, Wireless, Cell Modem			●		21
WIR-RME-L	WIR-RME-L	640181713278	wiSCAPE Wireless Relay External Module, 2.4GHz			●		1
WIR-RMI-IO	WIR-RMI-IO	640181717108	wiSCAPE Internal Fixture Module with Metering, 2.4GHz- 1000 ft. Range, 120-480VAC, Input/Output		●	●		1
WIR-EXPRESS	WIR-EXPRESS	640181717109	wiSCAPE Express Software - Single Computer License			●		0.2

HUBBELL®
Control Solutions

RATIO - RAR1

With a new spin on a classic rectilinear form, Ratio brings the traditional shoebox aesthetic into the next generation of LED lighting. Ratio features a dense optical array which provides reduced pixilation and increased visual comfort without compromising performance. Designed for sustained, long-term performance with advanced thermal management, an elegantly simple heat sink, and industry leading surge protection.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
RAR11003	RAR1-100-3		Ratio LED Series, Mounting Type: Square Arm mount, Finish Type: Bronze, Wattage: 100W, Number of LEDs: 160, Color Temperature: 4000 K, Light Distribution: IES TYPE III, 12,000 LMS, 120-277V.	●	●	●	●	13.5
RAR11004	RAR1-100-4	078598842395	Ratio LED Series, Mounting Type: Square Arm mount, Finish Type: Bronze, Wattage: 100W, Number of LEDs: 160, Color Temperature: 4000 K, Light Distribution: IES TYPE IV, 12,000 LMS, 120-277V.	●	●	●	●	3.7

RATIO - RAR2

With a new spin on a classic rectilinear form, Ratio brings the traditional shoebox aesthetic into the next generation of LED lighting. Ratio features a dense optical array which provides reduced pixilation and increased visual comfort without compromising performance. Designed for sustained, long-term performance with advanced thermal management, an elegantly simple heat sink, and industry leading surge protection.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
RAR21403	RAR2-140-3		Ratio LED Series, Mounting Type: Square Arm mount, Finish Type: Bronze, Wattage: 140W, Number of LEDs: 320, Color Temperature: 4000 K, Light Distribution: IES TYPE III, 18,000 LMS, 120-277V.	●	●	●	●	24
RAR21404	RAR2-140-4		Ratio LED Series, Mounting Type: Square Arm mount, Finish Type: Bronze, Wattage: 140W, Number of LEDs: 320, Color Temperature: 4000 K, Light Distribution: IES TYPE IV, 18,000 LMS, 120-277V.	●	●	●	●	24
RAR21653	RAR2-165-3	785988045082	Ratio LED Series, Mounting Type: Square Arm mount, Finish Type: Bronze, Wattage: 165W, Number of LEDs: 320, Color Temperature: 4000 K, Light Distribution: IES TYPE III, 21,000 LMS, 120-277V.	●	●	●	●	24
RAR21654	RAR2-165-4	785988045099	Ratio LED Series, Mounting Type: Square Arm mount, Finish Type: Bronze, Wattage: 165W, Number of LEDs: 320, Color Temperature: 4000 K, Light Distribution: IES TYPE IV, 21,000 LMS, 120-277V.	●	●	●	●	24

Airo LED Area/Site*

Compact sleek design with multiple LED configurations and simple installation. The Airo includes a universal mounting block for easy pole installation or mast arm option for 2-3/8 ft OD roadway brackets.

QS 10 **10-Day Quick-Ship Ordering Guide**
Order Limit Per Luminaire Selection: 15 (Contact factory for larger quantities)

ASL - [ ] - [ ] - [ ] - [ ] - [ ] - U - [ ] - [ ]

SERIES	MOUNTING	NUMBER OF LEDS	DRIVE CURRENT	CCT	DISTRIBUTION	VOLTAGE	FINISH	OPTION
ASL Area/Site	**ARM** Arm	**8L** 8 LEDs	**210** 2100mA	**4K** 4000K	**3** Type III	**U** Universal 120-277V	**BL** Black Textured	**7PR** Twist lock PC receptacle
	MAF Mast Arm	**16L** 12 LEDs	**070** 700mA	**5K** 5000K	**4** Type IV		**DB** Dark Bronze Textured	**SCP** Programmable motion control, factory default is 10% light output
		24L 24 LEDs					**PS** Platinum Silver Smooth	**SCPW** Programmable dimming control (see spec sheet for complete ordering information

*DesignLights Consortium® (DLC) qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org

Airo LED and 4" Square Straight Steel Pronto Combo (Single)*

Part Number	Catalog Number	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
A12NT3S20	A-12-N-T3-S20	–	Single, ASL Medium size 11,000 LMS LED, Dark Bronze, Type III, 4000K with 20' SSS pole, Dark Bronze, 120-277V	●	●	●	●	–
A12NT3S20LAB	A-12-N-T3-S20-LAB	–	Single, ASL Medium size 11,000 Lumen LED, Dark Bronze, Type III, 4000K with 20' SSS pole, Dark Bronze, Less Anchor Bolts, 120-277V	●	●	●	●	–
A12NT4S20	A-12-N-T4-S20	–	Single, ASL Medium size 11,000 LMS LED, Dark Bronze, Type IV, 4000K with 20' SSS pole, Dark Bronze, 120-277V	●	●	●	●	–
A12NT4S20LAB	A-12-N-T4-S20-LAB	–	Single, ASL Medium size 11,000 LMS LED, Dark Bronze, Type IV, 4000K with 20' SSS pole, Dark Bronze, Less Anchor Bolts, 120-277V	●	●	●	●	–
A18NT3S20	A-18-N-T3-S20	–	Single, ASL Large size 16,000 LMS LED, Dark Bronze, Type III, 4000K with 20' SSS pole, Dark Bronze, 120-277V	●	●	●	●	–
A18NT3S20LAB	A-18-N-T3-S20-LAB	–	Single, ASL Large size 16,000 LMS LED, Dark Bronze, Type III, 4000K with 20' SSS pole, Dark Bronze, Less Anchor Bolts, 120-277V	●	●	●	●	–
A18NT4S20	A-18-N-T4-S20	–	Single, ASL Large size 16,000 LMS LED, Dark Bronze, Type IV, 4000K with 20' SSS pole, Dark Bronze, 120-277V	●	●	●	●	–
A18NT4S20LAB	A-18-N-T4-S20-LAB	–	Single, ASL Large siz16,000 LMS LED, Dark Bronze, Type IV, 4000K with 20' SSS pole, Dark Bronze, Less Anchor Bolts, 120-277V	●	●	●	●	–
A18NT3S25	A-18-N-T3-S25	–	Single, ASL Large size 16,000 LMS LED, Dark Bronze, Type III, 4000K with 25' SSS pole, Dark Bronze, 120-277V	●	●	●	●	–
A18NT3S25LAB	A-18-N-T3-S25-LAB	–	Single, ASL Large size 16,000 LMS LED, Dark Bronze, Type III, 4000K with 25' SSS pole, Dark Bronze, Less Anchor Bolts, 120-277V	●	●	●	●	–
A18NT4S25	A-18-N-T4-S25	–	Single, ASL Large size 16,000 LMS LED, Dark Bronze, Type IV, 4000K with 25' SSS pole, Dark Bronze, 120-277V	●	●	●	●	–
A18NT4S25LAB	A-18-N-T4-S25-LAB	–	Single, ASL Large size 16,000 LMS LED, Dark Bronze, Type IV, 4000K with 25' SSS pole, Dark Bronze, Less Anchor Bolts, 120-277V	●	●	●	●	–

Airo LED and 4" Square Straight Steel Pronto Combo (Double)*

Part Number	Catalog Number	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
A122XNT3S20	A-12-2X-N-T3-S20	–	Double, ASL Medium size 11,000 LMS LED, Dark Bronze, Type III, 4000K with 20' SSS pole, Dark Bronze, 120-277 Volt	●	●	●	●	–
A122XNT3S20LAB	A-12-2X-N-T3-S20-LAB	–	Double, ASL Medium size 11,000 LMS LED, Dark Bronze, Type III, 4000K with 20' SSS pole, Dark Bronze, Less Anchor Bolts, 120-277V	●	●	●	●	–
A122XNT4S20	A-12-2X-N-T3-S20-LAB	–	Double, ASL Medium size 16,000 LMS LED, Dark Bronze, Type IV, 4000K with 20' SSS pole, Dark Bronze, 120-277V	●	●	●	●	–
A122XNT4S20LAB	A-12-2X-N-T4-S20-LAB	–	Double, ASL Medium size 16,000 LMS LED, Dark Bronze, Type IV, 4000K with 20' SSS pole, Dark Bronze, Less Anchor Bolts, 120-277V	●	●	●	●	–
A182XNT3S20	A18-2X-N-T3-S20	–	Double, ASL Large size 16,000 LMS LED, Dark Bronze, Type III, 4000K with 20' SSS pole, Dark Bronze, 120-277V	●	●	●	●	–
A182XNT3S20LAB	A18-2X-N-T3-S20-LAB	–	Double, ASL Large size 16,000 LMS LED, Dark Bronze, Type III, 4000K with 20' SSS pole, Dark Bronze, Less Anchor Bolts, 120-277V	●	●	●	●	–
A182XNT4S20	A18-2X-N-T4-S20	–	Single, ASL Large size 16,000 LMS LED, Dark Bronze, Type IV, 4000K with 20' SSS pole, Dark Bronze, 120-277V	●	●	●	●	–
A182XNT4S20LAB	A18-2X-N-T4-S20-LAB	–	Double, ASL Large size 16,000 LMS LED, Dark Bronze, Type IV, 4000K with 20' SSS pole, Dark Bronze, Less Anchor Bolts, 120-277V	●	●	●	●	–
A182XNT3S25	A18-2X-N-T3-S25	–	Double, ASL Large size 16,000 LMS LED, Dark Bronze, Type III, 4000K with 25' SSS pole, Dark Bronze, 120-277V	●	●	●	●	–
A182XNT3S25LAB	A18-2X-N-T3-S25-LAB	–	Double, ASL Large size 16,000 LMS LED, Dark Bronze, Type III, 4000K with 25' SSS pole, Dark Bronze, Less Anchor Bolts, 120-277V	●	●	●	●	–
A182XNT4S25	A18-2X-N-T4-S25	–	Double, ASL Large size 16,000 LMS LED, Dark Bronze, Type IV, 4000K with 25' SSS pole, Dark Bronze, 120-277V	●	●	●	●	–
A182XNT4S25LAB	A18-2X-N-T4-S25-LAB	–	Double, ASL Large size 16,000 LMS LED, Dark Bronze, Type IV, 4000K with 25' SSS pole, Dark Bronze, Less Anchor Bolts, 120-277V	●	●	●	●	–

*DesignLights Consortium® (DLC) qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org

DDL Patrolman

Multi-purpose Dusk-to-Dawn LED luminaire

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
DDL9L1	DDL-9L1	785988030699	LED Dusk-to-Dawn, Die-Cast Aluminum/Brass, 80 CRI, 5000K, 4230 LMS, Arm included, Symmetric Lens, Type II, Type V Distribution, 120V, 39W, 9 LEDs, 108 LPW, Textured Gray, CSA	●		●	●	7
ARMDD24	ARM-DD24	785988033287	Arm, 24"	●	●	●	●	3.22
ARMDD30	ARM-DD30	785988033294	Arm, 30"	●	●	●	●	3.22

SGD Sling

Multi-purpose dusk-to-dawn LED luminare provides general purpose area, security, roadway and landscape lighting. Rugged die-cast aluminum housing with textured gray or dark bronze powder paint provides corrosion resistance and clean finish.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
SGD404K	SGD-40-4K	840141419718	SGD Sling Multi-purpose Dusk-to-Dawn LED Luminaire, Mounting Type: Arm;Wall (surface), Wattage: 40 W, Color Temperature: 4000 K, Light Distribution: IES Type V, Voltage Rating: 120-277 VAC	●	●			7.47
GD404KGR	GD-40-4K-GR	840141419695	SGD Sling Multi-purpose Dusk-to-Dawn LED Luminaire, Mounting Type: Arm;Wall (surface), Wattage: 40 W, Color Temperature: 4000 K, Light Distribution: IES Type V, Voltage Rating: 120-277 VAC	●	●			7.47
GD604K	GD-60-4K	840141419725	SGD Sling Multi-purpose Dusk-to-Dawn LED Luminaire, Mounting Type: Arm;Wall (surface), Wattage: 56 W, Color Temperature: 4000 K, Light Distribution: IES Type V, Voltage Rating: 120-277 VAC	●	●			7.47
SGD604KR	SGD-60-4K-GR	840141419701	SGD Sling Multi-purpose Dusk-to-Dawn LED Luminaire, Mounting Type: Arm;Wall (surface), Wattage: 56 W, Color Temperature: 4000 K, Light Distribution: IES Type V, Voltage Rating: 120-277 VAC	●	●			7.47

*DesignLights Consortium® (DLC) qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org

ALF Series

ALF is a versatile LED wall mount solution for doorways, entrances or small area illumination. It features adjustable pivot from 0-75˚ and is available with optional photo control (120V only)

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
ALF12LU5KBZ	ALF-12LU-5K-BZ	785988020713	LED, Medium, Die-Cast Aluminum, 70 CRI, 5000K, 2303 LMS, Knuckle Mount, Glass Lens, 6x5 Distribution, 0-10V Dimming, 120-277V, 20W, 12 LEDs, 110 LPW, Dark Bronze Textured, CSA	●		●	●	3.22
ALF6LU5KBZ	ALF-6LU-5K-BZ	785988019168	LED, Small, Die-Cast Aluminum, 70 CRI, 5000K, 1122 LMS, Knuckle Mount, Glass Lens, 6x5 Distribution, 0-10V Dimming, 120-277V, 10W, 6 LEDs, 110 LPW, Dark Bronze Textured, CSA	●		●	●	3.22

Mini Colt

Versatile compact LED floodlight perfect for a variety of applications including: landscape, accent, pole/column, facade and small area illumination. Stake or threaded mounting plus adjustable knuckle provides mounting flexibility. Durable die-cast design with corrosion resistant powder coat paint finish for years of maintenance free illumination.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
MBUL1L3K1	MBUL-1L3K-1	785988031955	LED, Small, Die-Cast Aluminum, 83 CRI, 3000K, 1115 LMS, Knuckle Mount, Glass Lens, 6x6 Distribution, 0-10V Dimming, 120V, 13W, 1 LED, 84 LPW, Dark Bronze Textured, CSA	●		●	●	.5

*DesignLights Consortium® (DLC) qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org

Colt LBUL

Traditional landscape form with improved performance and efficacy, 1/2" x 14 NPS mount and adjustable knuckle for aiming. Features wide NEMA 6x6 distribution provides uniform lighting on surface. Durable die-cast design with corrosion resistant powder coat paint finish for years of maintenance free illumination.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
93116281	LBUL-20-120-3K	840141419886	LED, Small, Die-Cast Aluminum, 80 CRI, 3000K, 2000 LMS, Knuckle Mount, Glass Lens, 6x6 Distribution, 0-10V Dimming, 120V, 20W, 100 LPW, Dark Bronze Textured, CSA	●	●			1.5
93116282	LBUL-20-120-4K	840141419893	LED, Small, Die-Cast Aluminum, 80 CRI, 3000K, 2000 LMS, Knuckle Mount, Glass Lens, 6x6 Distribution, 0-10V Dimming, 120V, 20W, 100 LPW, Dark Bronze Textured, CSA	●	●			1.5

Colt

Compact sleek and stylish LED Colt provides energy-efficient small area floodlighting solutions featuring three distributions in one product. This powerful LED luminaire is the perfect choice for many floodlighting applications including: accent, landscape, facade or small area illumination.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
BUL1L3KU	BUL-1L3K-U	785988031986	LED, Small, Die-Cast Aluminum, 70 CRI, 3000K, 1873, 1932, 1802 LMS, Knuckle Mount, Acrylic Lens, 3x3, 4x4, 6x6 Distribution, 0-10V Dimming, 120-277V, 21W, 1 LED, 92 LPW, Dark Bronze Textured, CSA	●		●		4
BUL1L4KU	BUL-1L4K-U	785988031993	LED, Small, Die-Cast Aluminum, 70 CRI, 4000K, 1979, 1965 1886 LMS, Knuckle Mount, Acrylic Lens, 3x3, 4x4, 6x6 Distribution, 0-10V Dimming, 120-277V, 21W, 1 LED, 92 LPW, Dark Bronze Textured, CSA	●		●		4
BULCOLOR	BUL-COLOR	785988032006	Color Lenses	●		●		4

*DesignLights Consortium® (DLC) qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org

RATIO - RFL2/RFL3

Compact LED flood with a variety of NEMA distribution for lighting applications such as safety/security, accent, flag pole, columns, or signs. The Ratio flood series was designed in cohesion with the site/area products to provide a sleek yet timeless product family to be used throughout a site. Ratio features a dense optical array which provides reduced pixelation and increased visual comfort without compromising performance.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
93102079	RFL2-25-4K	078598844337	Ratio Flood Size 2, Mounting Type: Knuckle Mount, Finish Type: Bronze, Wattage: 26W, Number of LEDs: 44, Color Temperature: 4000K, Light Distribution: Wide Distribution, 3500 LMS, 120-277V.			●	●	3.7
93102081	RFL2-25-4K-PC	078598844351	Ratio Flood Size 2, Mounting Type: Knuckle Mount, Finish Type: Bronze, Wattage: 26W, Number of LEDs: 44, Color Temperature: 4000K, Light Distribution: Wide Distribution, 3500 LMS, 120-277V, Options: button photocontrol.			●	●	3.7
93102080	RFL2-25-5K	078598844344	Ratio Flood Size 2, Mounting Type: Knuckle Mount, Finish Type: Bronze, Wattage: 26W, Number of LEDs: 44, Color Temperature: 5000K, Light Distribution: Wide Distribution, 3500 LMS, 120-277V.	●	●	●		3.7
93102082	RFL2-25-5K-PC	078598844368	Ratio Flood Size 2, Mounting Type: Knuckle Mount, Finish Type: Bronze, Wattage: 26W, Number of LEDs: 44, Color Temperature: 5000K, Light Distribution: Wide Distribution, 3500 LMS, 120-277V, Options: button photocontrol.	●	●	●		3.7
93102083	RFL3-40-4K	078598844375	Ratio Flood Size 3, Mounting Type: Knuckle Mount, Finish Type: Bronze, Wattage: 34W, Number of LEDs: 90, Color Temperature: 4000K, Light Distribution: Wide Distribution, 8000 LMS, 120-277V.			●	●	5.5
93102085	RFL3-40-4K-PC	078598844399	Ratio Flood Size 3, Mounting Type: Knuckle Mount, Finish Type: Bronze, Wattage: 34W, Number of LEDs: 90, Color Temperature: 4000K, Light Distribution: Wide Distribution, 8000 LMS, 120-277V, Options: button photocontrol.			●	●	5.5
93102084	RFL3-40-5K	078598844382	Ratio Flood Size 3, Mounting Type: Knuckle Mount, Finish Type: Bronze, Wattage: 34W, Number of LEDs: 90, Color Temperature: 5000K, Light Distribution: Wide Distribution, 8000 LMS, 120-277V.	●	●	●		5.5
93102086	RFL3-40-5K-PC	078598844405	Ratio Flood Size 3, Mounting Type: Knuckle Mount, Finish Type: Bronze, Wattage: 34W, Number of LEDs: 90, Color Temperature: 5000K, Light Distribution: Wide Distribution, 4439 LMS, 120-277V, Options: button photocontrol.	●	●	●		5.5
93102087	RFL3-50-4K	078598844412	Ratio Flood Size 3, Mounting Type: Knuckle Mount, Finish Type: Bronze, Wattage: 52W, Number of LEDs: 90, Color Temperature: 4000K, Light Distribution: Wide Distribution, 6823 LMS, 120-277V.			●	●	5.5
93102089	RFL3-50-4K-PC	078598844436	Ratio Flood Size 3, Mounting Type: Knuckle Mount, Finish Type: Bronze, Wattage: 52W, Number of LEDs: 90, Color Temperature: 4000K, Light Distribution: Wide Distribution, 6823 LMS, 120-277V, Options: button photocontrol.			●	●	5.5
93102088	RFL3-50-5K	078598844429	Ratio Flood Size 3, Mounting Type: Knuckle Mount, Finish Type: Bronze, Wattage: 52W, Number of LEDs: 90, Color Temperature: 5000K, Light Distribution: Wide Distribution, 6654 LMS, 120-277V.	●	●	●		5.5
93102090	RFL3-50-5K-PC	078598844443	Ratio Flood Size 3, Mounting Type: Knuckle Mount, Finish Type: Bronze, Wattage: 52W, Number of LEDs: 90, Color Temperature: 5000K, Light Distribution: Wide Distribution, 6654 LMS, 120-277V, Options: button photocontrol.	●	●	●		5.5

*DesignLights Consortium® (DLC) qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org

HUBBELL®
Outdoor Lighting

RATIO - RFL4/RFL5

Medium and large LED floods with a variety of NEMA distribution for lighting applications such as safety/security, accent, flag pole, columns, or signs. The Ratio flood series was designed in cohesion with the site/area products to provide a sleek yet timeless product family to be used throughout a site. Ratio features a dense optical array which provides reduced pixelation and increased visual comfort without compromising performance.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
93102092	RFL4-120-4K-K	078598844467	Ratio Flood Size 4, Mounting Type: Knuckle Mount, Finish Type: Bronze, Wattage: 124W, Number of LEDs: 176, Color Temperature: 4000K, Light Distribution: Wide Distribution, 15,000 LMS, 120-277V.			●		16
93102094	RFL4-120-4K-T	078598844481	Ratio Flood Size 4, Mounting Type: Trunnion Mount, Finish Type: Bronze, Wattage: 124W, Number of LEDs: 176, Color Temperature: 4000K, Light Distribution: Wide Distribution, 15,000 LMS, 120-277V.			●		16
93102091	RFL4-120-5K-K	078598844450	Ratio Flood Size 4, Mounting Type: Knuckle Mount, Finish Type: Bronze, Wattage: 124W, Number of LEDs: 176, Color Temperature: 5000K, Light Distribution: Wide Distribution, 15,000 LMS, 120-277V.	●	●	●	●	16
93102093	RFL4-120-5K-T	078598844474	Ratio Flood Size 4, Mounting Type: Trunnion Mount, Finish Type: Bronze, Wattage: 124W, Number of LEDs: 176, Color Temperature: 5000K, Light Distribution: Wide Distribution, 15,000 LMS, 120-277V.	●	●	●	●	16
93102099	RFL5-265-4K-K	078598844504	Ratio Flood Size 5, Mounting Type: Knuckle Mount, Finish Type: Bronze, Wattage: 266W, Number of LEDs: 360, Color Temperature: 4000K, Light Distribution: Wide Distribution, 32,000 LMS, 120-277V.			●		25.7
93102097	RFL5-265-4K-T	078598844528	Ratio Flood Size 5, Mounting Type: Knuckle Mount, Finish Type: Bronze, Wattage: 266W, Number of LEDs: 360, Color Temperature: 4000K, Light Distribution: Wide Distribution, 32,000 LMS, 120-277V.			●		25.7
93102096	RFL5-265-5K-K	078598844498	Ratio Flood Size 5, Mounting Type: Knuckle Mount, Finish Type: Bronze, Wattage: 266W, Number of LEDs: 360, Color Temperature: 5000K, Light Distribution: Wide Distribution, 32,000 LMS, 120-277V.		●	●	●	25.7
93102098	RFL5-265-5K-T	078598844511	Ratio Flood Size 5, Mounting Type: Knuckle Mount, Finish Type: Bronze, Wattage: 266W, Number of LEDs: 360, Color Temperature: 5000K, Light Distribution: Wide Distribution, 32,000 LMS, 120-277V.		●	●	●	25.7

*DesignLights Consortium® (DLC) qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org

Factor Floods

High performance architectural styled energy-efficient floodlights available a variety of colors, feature multiple NEMA beam spreads, excellent uniformity, photocontrol and shielding options for optimum performance and energy savings.

10-Day Quick-Ship Ordering Guide
Order Limit Per Luminaire Selection: 15 (Contact factory for larger quantities)

[ ] - [ ] - [ ] [ ] - [ ] - U - [ ] - [ ] - [ ]

SERIES	# LEDS	WATTAGE	CCT	BEAM	VOLTAGE	MOUNTING	FINISH	OPTIONS
FSL	**10L** 10 LEDs	25W	**4K** 4000K	**M** Medium	**U** 120-277V	**Y** Yoke	**BL** Black Textured	**PC(X)** Button photocontrol, replace X with voltage, specify 1-120V, 2-208V, 3-240V, 4-277V
FML	**20L** 20 LEDs	52W	**5K** 5000K	**N** Narrow		**K** Knuckle	**DB** Dark Bronze Textured	
FLL	**42L** 42 LEDs	95W		**W** Wide			**PS** Platinum Silver Smooth	
FXL	**84L** 84 LEDs	190W						

Factor - Large

Large LED high performance architectural styled energy-efficient floodlights available a variety of colors, feature multiple NEMA beam spreads, excellent uniformity, photocontrol and shielding options for optimum performance and energy savings.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
FLL1504KUK	FLL-150-4K-U-K	785988033690	LED, Large, Die-Cast Aluminum, 80 CRI, 4000K, 14,655 LMS, Knuckle Mount, Glass Lens, 6x6 Distribution, 0-10V Dimming, 120-277V, 150W, 42 LEDs, 98 LPW, Dark Bronze Textured, CSA	●	●	●	●	20
FLL1504KUY	FLL-150-4K-U-Y	785988033676	LED, Large, Die-Cast Aluminum, 80 CRI, 4000K, 14,655 LMS, Yoke Mount, Glass Lens, 6x6 Distribution, 0-10V Dimming, 120-277V, 150W, 42 LEDs, 98 LPW, Dark Bronze Textured, CSA	●		●	●	20
FLL1505KUK	FLL-150-5K-U-K	785988033683	LED, Large, Die-Cast Aluminum, 80 CRI, 5000K, 14,764 LMS, Knuckle Mount, Glass Lens, 6x6 Distribution, 0-10V Dimming, 120-277V, 150W, 42 LEDs, 98 LPW, Dark Bronze Textured, CSA	●		●	●	20
FLL1505KUY	FLL-150-5K-U-Y	785988033669	LED, Large, Die-Cast Aluminum, 80 CRI, 5000K, 14,764 LMS, Yoke Mount, Glass Lens, 6x6 Distribution, 0-10V Dimming, 120-277V, 150W, 42 LEDs, 98 LPW, Dark Bronze Textured, CSA	●	●	●	●	20

*DesignLights Consortium® (DLC) qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org

LNC LitePak

The compact LNC LED is designed for perimeter illumination and available in 3 lumen packages for safety, security and identity. Typical mounting height is up to 12 ft. with 40ft. fixture spacing (without acrylic diffuser) and 30ft spacing with acrylic diffuser installed.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
LNC5LU4K	LNC-5LU-4K	785988033331	LED, Compact, Die-Cast Aluminum, 70 CRI, 4000K, 1150 LMS, Wall Mount, Type III Distribution, 0-10V Dimming, 120-277V, 13W, 5 LEDs, 88 LPW, Dark Bronze Textured, CSA	●		●	●	4.0
LNC5LU5K	LNC-5LU-5K	785988020645	LED, Compact, Die-Cast Aluminum, 70 CRI, 5000K, 1132 LMS, Wall Mount, Type III Distribution, 0-10V Dimming, 120-277V, 13W, 5 LEDs, 87 LPW, Dark Bronze Textured, CSA	●	●	●	●	4.0
LNC7LU4K31	LNC-7LU-4K-3-1	785988033348	LED, Compact, Die-Cast Aluminum, 70 CRI, 4000K, 1539 LMS, Wall Mount, Type III Distribution, 0-10V Dimming, 120-277V, 17W, 7 LEDs, 90 LPW, Dark Bronze Textured, CSA	●		●	●	4.0
LNC7LU5K31	LNC-7LU-5K-3-1	785988020669	LED, Compact, Die-Cast Aluminum, 70 CRI, 5000K, 1500 LMS, Wall Mount, Type III Distribution, 0-10V Dimming, 120-277V, 17W, 7 LEDs, 88 LPW, Dark Bronze Textured, CSA	●		●	●	4.0
LNC9LU4K31	LNC-9LU-4K-3-1	785988033355	LED, Compact, Die-Cast Aluminum, 70 CRI, 4000K, 1989 LMS, Wall Mount, Type III Distribution, 0-10V Dimming, 120-277V, 22W, 9 LEDs, 90 LPW, Dark Bronze Textured, CSA	●	●	●		4.0
LNC9LU5K31	LNC-9LU-5K-3-1	785988020683	LED, Compact, Die-Cast Aluminum, 70 CRI, 5000K, 2024 LMS, Wall Mount, Type III Distribution, 0-10V Dimming, 120-277V, 22W, 9 LEDs, 92 LPW, Dark Bronze Textured, CSA	●	●	●	●	4.0

LNC Litepak LED Wallpacks

The compact LNC LED is designed for perimeter illumination and available in 3 lumen packages for safety, security and identity. Typical mounting height is up to 12 ft. with 40ft. fixture spacing (without acrylic diffuser) and 30ft spacing with acrylic diffuser installed.

10-Day Quick-Ship Ordering Guide
Order Limit Per Luminaire Selection: 15 (Contact factory for larger quantities)

LNC - [ ] - U - [ ] - [ ] - [ ]

SERIES	NUMBER OF LEDS	VOLTAGE	CCT	DISTRIBUTION	FINISH
LNC Compact LitePak LNC	**5L** 5 LEDs	**U** Universal 120-277V	**4K** 4000K nominal	**3** Type III	**1** Dark Bronze Textured
	7L 7 LEDs		**5K** 5000K nominal	**4** Type IV	**2** Black Textured
	9L 9 LEDs				**5** Platinum Silver Smooth

*DesignLights Consortium® (DLC) qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org

LNC2 LitePak

The LitePak LNC2 LED is designed for perimeter illumination for safety, security and identity. The LNC2 has 60% more lumens and increased performance than smaller LNC models. The LNC2 achieves up to 85% energy savings over traditional lighting sources.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
LNC212LU4K31	LNC2-12LU-4K-3-DB	785988033362	LED, Small, Die-Cast Aluminum, 70 CRI, 4000K, 2616 LMS, Wall Mount, Type III Distribution, 0-10V Dimming, 120-277V, 28W, 12 LEDs, 93 LPW, Dark Bronze Textured, CSA	●	●	●	●	7.0
LNC212LU5K31	LNC2-12LU-5K-3-DB	785988030071	LED, Small, Die-Cast Aluminum, 70 CRI, 5000K, 2629 LMS, Wall Mount, Type III Distribution, 0-10V Dimming, 120-277V, 28W, 12 LEDs, 94 LPW, Dark Bronze Textured, CSA	●	●	●	●	7.0
LNC212LU5K31PCU	LNC2-12LU-5K-3-DB-PCU	785988032174	LED, Small, Die-Cast Aluminum, 70 CRI, 5000K, 2629 LMS, Wall Mount, Type III Distribution, 0-10V Dimming, 120-277V, 28W, 12 LEDs, 93 LPW, Dark Bronze Textured, CSA, Photocontrol	●		●	●	7.5
LNC218LU4K31	LNC2-18LU-4K-3-DB	785988033379	LED, Small, Die-Cast Aluminum, 70 CRI, 4000K, 4014 LMS, Wall Mount, Type III Distribution, 0-10V Dimming, 120-277V, 42W, 18 LEDs, 95 LPW, Dark Bronze Textured, CSA	●	●	●	●	7.0
LNC218LU5K31	LNC2-18LU-5K-3-DB	785988021031	LED, Small, Die-Cast Aluminum, 70 CRI, 5000K, 4033 LMS, Wall Mount, Type III Distribution, 0-10V Dimming, 120-277V, 42W, 18 LEDs, 96 LPW, Dark Bronze Textured, CSA	●		●	●	7.0
LNC218LU5K31PCU	LNC2-18LU-5K-3-DB-PCU	785988032181	LED, Small, Die-Cast Aluminum, 70 CRI, 5000K, 4033 LMS, Wall Mount, Type III Distribution, 0-10V Dimming, 120-277V, 42W, 18 LEDs, 96 LPW, Dark Bronze Textured, CSA, Photocontrol	●		●	●	7.5
LNC2CS	LNC2-CS	78598841466	Comfort Shield, Small, Acrylic Lens	●	●	●	●	1.0
LNC2P354KPCU	LNC2-P35-4K-PCU	785988041640	LED, Small, Die-Cast Aluminum, 70 CRI, 4000K, 4025 LMS, Wall Mount, Acrylic Lens, Forward Throw Distribution, 0-10V Dimming, 120-277V, 37W, 1 LED, 109 LPW, Dark Bronze Textured, CSA, Photocontrol	●	●	●	●	7.5
LNC2P35PCU	LNC2-P35-PCU	785988041657	LED, Small, Die-Cast Aluminum, 70 CRI, 5000K, 4108 LMS, Wall Mount, Acrylic Lens, Forward Throw Distribution, 0-10V Dimming, 120-277V, 37W, 1 LED, 111 LPW, Dark Bronze Textured, CSA, Photocontrol	●	●	●	●	7.5

10-Day Quick-Ship Ordering Guide
Order Limit Per Luminaire Selection: 15 (Contact factory for larger quantities)

LNC2 - [ ] - [ ] - 070 - [ ] - U - [ ] - [ ]

SERIES
- **LNC2** Small LitePak LNC2

NUMBER OF LEDS
- **12L** 12 LEDs
- **18L** 18 LEDs

CCT
- **4K** 4000K, 70 CRI
- **5K** 5000K, 70 CRI

DRIVE CURRENT
- **070** 700mA

DISTRIBUTION
- **3** Type III
- **4** Type IV

VOLTAGE
- **U** Universal 120-277V

FINISH
- **BL** Black Textured
- **DB** Dark Bronze Textured
- **PS** Platinum Silver Smooth

SPECIFY SCP HEIGHT
- **8F** Up to 8' mounting height
- **20F** Up to 20' mounting height

OPTIONS
- **PC** Photocontrol 120V-277V
- **SCP** Programmable motion control, factory default is 10% light output
- **CS** Frosted acrylic diffuse lens
- **CH** Conduit Hubs

*DesignLights Consortium® (DLC) qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org

LNC3 Litepak LED Wallpacks*

The LNC3 features two different lumen packages and multiple distributions and CCT for maximum light level and mounting height flexibility. Capable of replacing up to 250W HID solutions at over 70% energy savings, the LNC3 can be spaced at up to 4 times mounting height providing excellent performance and uniformity.

10-Day Quick-Ship Ordering Guide
Order Limit Per Luminaire Selection: 15 (Contact factory for larger quantities)

LNC3 - 24L - [ ] - [ ] - [ ] - U - [ ] - [ ]

SERIES
- **LNC3** Medium LitePak LNC3

NUMBER OF LEDS
- **24L** 24 LEDs

CCT
- **4K** 4000K nominal
- **5K** 5000K nominal

DRIVE CURRENT
- **075** 750mA
- **105** 1050mA

DISTRIBUTION
- **3** Type III
- **4** Type IV

VOLTAGE
- **U** Universal 120-277V

FINISH
- **BL** Black Textured
- **DB** Dark Bronze Textured
- **PS** Platinum Silver Smooth

SPECIFY SCP HEIGHT
- **8F** Up to 8' mounting height
- **20F** Up to 20' mounting height

OPTIONS
- **PCU** Photocontrol 120V-277V
- **7PR** 7 pin PCR
- **CS** Frosted acrylic diffuse lens
- **SCP** Programmable motion control, factory default is 10% light output

LNC4 LitePak

The LNC4 features four different lumen packages and multiple distributions and CCT for maximum light level and mounting height flexibility. Capable of replacing up to 400W HID solutions at over 70% energy savings, the LNC4 can be spaced at up to 5 times mounting height providing excellent performance and uniformity.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet
LNC4CS	LNC4-CS	785988032853	Comfort Shield, Large	●	●	●	●	41	

10-Day Quick-Ship Ordering Guide
Order Limit Per Luminaire Selection: 15 (Contact factory for larger quantities)

LNC4 - [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ]

SERIES
- **LNC4** Large LitePak LNC4

NUMBER OF LEDS
- **36L** 36 LEDs
- **44L** 44 LEDs

CCT
- **4K** 4000K nominal
- **5K** 5000K nominal

DRIVE CURRENT
- **065** 650mA (44L only)
- **105** 1050mA

DISTRIBUTION
- **3** Type III
- **4** Type IV

VOLTAGE
- **U** Universal 120-277V
- **5** 480V (44L only)

FINISH
- **BL** Black Textured
- **DB** Dark Bronze Textured
- **PS** Platinum Silver Smooth

SPECIFY SCP HEIGHT
- **8F** Up to 8' mounting height
- **20F** Up to 20' mounting height

OPTIONS
- **PCU** Photocontrol 120V-277V
- **7PR** 7 pin PCR
- **CS** Frosted acrylic diffuse lens
- **SCP** Programmable motion control, factory default is 10% light output

*DesignLights Consortium® (DLC) qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org

SG Sling Series

Slender wallpack/floodlight available in two sizes for a variety of applications including building perimeter/security lighting, entrances, stairways, loading docks or facades for schools, apartments or commercial buildings.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
SG110PCU	SG1-10-PCU	785988044719	LED, Small, Die-Cast Aluminum, 70 CRI, 5000K, 1349 LMS, Wall Mount, Forward Throw Distribution, 0-10V Dimming, 120-277V, 11W, 2 LEDs, 122 LPW, Dark Bronze Textured, CSA, Photocontrol	●	●	●	●	4.3
SG1104KPCU	SG1-10-4K-PCU	785988044726	LED, Small, Die-Cast Aluminum, 70 CRI, 4000K, 1424 LMS, Wall Mount, Forward Throw Distribution, 0-10V Dimming, 120-277V, 11W, 2 LEDs, 129 LPW, Dark Bronze Textured, CSA, Photocontrol	●	●	●	●	4.3
SG1204KPCU	SG1-20-4K-PCU	785988033195	LED, Small, Die-Cast Aluminum, 70 CRI, 4000K, 2310 LMS, Wall Mount, Forward Throw Distribution, 0-10V Dimming, 120-277V, 21W, 2 LEDs, 108 LPW, Dark Bronze Textured, CSA, Photocontrol	●	●	●	●	4.3
SG120PCU	SG1-20-PCU	785988033140	LED, Small, Die-Cast Aluminum, 70 CRI, 5000K, 2263 LMS, Wall Mount, Forward Throw Distribution, 0-10V Dimming, 120-277V, 21W, 2 LEDs, 108 LPW, Dark Bronze Textured, CSA, Photocontrol	●	●	●	●	4.3
SG1304KPCU	SG1-30-4K-PCU	785988033201	LED, Small, Die-Cast Aluminum, 70 CRI, 4000K, 3060 LMS, Wall Mount, Forward Throw Distribution, 0-10V Dimming, 120-277V, 29W, 2 LEDs, 105 LPW, Dark Bronze Textured, CSA, Photocontrol	●	●	●	●	4.3
SG140PCU	SG1-40-PCU	785988044733	LED, Small, Die-Cast Aluminum, 70 CRI, 5000K, 4008 LMS, Wall Mount, Forward Throw Distribution, 0-10V Dimming, 120-277V, 11W, 2 LEDs, 105 LPW, Dark Bronze Textured, CSA, Photocontrol	●	●	●	●	4.3
SG1404KPCU	SG1-40-4K-PCU	785988044740	LED, Small, Die-Cast Aluminum, 70 CRI, 4000K, 4070 LMS, Wall Mount, Forward Throw Distribution, 0-10V Dimming, 120-277V, 11W, 2 LEDs, 106 LPW, Dark Bronze Textured, CSA, Photocontrol	●	●	●	●	4.3
SG130PCU	SG1-30-PCU	785988033157	LED, Small, Die-Cast Aluminum, 70 CRI, 5000K, 3270 LMS, Wall Mount, Forward Throw Distribution, 0-10V Dimming, 120-277V, 29W, 2 LEDs, 113 LPW, Dark Bronze Textured, CSA, Photocontrol	●	●	●	●	4.3
SG2504KPCU	SG2-50-4K-PCU	785988033225	LED, Large, Die-Cast Aluminum, 70 CRI, 4000K, 5526 LMS, Wall Mount, Forward Throw Distribution, 0-10V Dimming, 120-277V, 51W, 3 LEDs, 109 LPW, Dark Bronze Textured, CSA, Photocontrol	●	●	●	●	11
SG250PCU	SG2-50-PCU	785988033171	LED, Large, Die-Cast Aluminum, 70 CRI, 5000K, 5548 LMS, Wall Mount, Forward Throw Distribution, 0-10V Dimming, 120-277V, 51W, 3 LEDs, 110 LPW, Dark Bronze Textured, CSA, Photocontrol	●	●	●	●	11
SG2804KPCU	SG2-80-4K-PCU	785988033232	LED, Large, Die-Cast Aluminum, 70 CRI, 4000K, 8079 LMS, Wall Mount, Forward Throw Distribution, 0-10V Dimming, 120-277V, 80W, 3 LEDs, 101 LPW, Dark Bronze Textured, CSA, Photocontrol	●	●	●	●	11
SG280PCU	SG2-80-PCU	785988033188	LED, Large, Die-Cast Aluminum, 70 CRI, 5000K, 8061 LMS, Wall Mount, Forward Throw Distribution, 0-10V Dimming, 120-277V, 80W, 3 LEDs, 101 LPW, Dark Bronze Textured, CSA, Photocontrol	●	●	●	●	11
SG1KNUCKLE	SG1-KNUCKLE	785988033270	Knuckle Floodlight Mount Kit, with Visor, Knuckle Mount, Dark Bronze Textured	●	●	●	●	1
SG1YOKE	SG1-YOKE	785988033249	Yoke Floodlight Mount Kit, with Visor, Dark Bronze Textured	●	●	●	●	1
SG2KNUCKLE	SG2-KNUCKLE	785988038909	Knuckle Floodlight Mount Kit, with Visor, Dark Bronze Textured	●	●	●	●	1
SG2YOKE	SG2-YOKE	785988038893	Yoke Floodlight Mount Kit, with Visor, Dark Bronze Textured	●	●	●	●	1

*DesignLights Consortium® (DLC) qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org

SGC Sling

Commercial grade LED canopy luminare for use in outdoor applications such a commercial building, retail, government and educational facilities. Low profile housing with a lightly diffused lens for reduced pixilation and glare. Heat dissipating fins provide superior thermal performance extending the life of the electronic components.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
SGC204K	SGC-20-4K	840141419732	SGC Sling Canopy, Lamp Type: LED, Lamp Included: Yes, Light Output: 2,815 lm, Wattage: 22 W, Voltage Rating: 120-277 VAC, Color Temperature: 4000 K, 70 CRI, Light Distribution: Type V Distribution, Color: Dark bronze textured	●	●			4.9
SGC404K	SGC-40-4K	840141419749	SGC Sling Canopy, Lamp Type: LED, Lamp Included: Yes, Light Output: 4,997 lm, Wattage: 39 W, Voltage Rating: 120-277 VAC, Color Temperature: 4000 K, 70 CRI, Light Distribution: Type V Distribution, Color: Dark bronze textured	●	●			4.9
SGC40-KWH	SGC-40-4K-WH	840141419763	SGC Sling Canopy, Lamp Type: LED, Lamp Included: Yes, Light Output: 4,997 lm, Wattage: 39 W, Voltage Rating: 120-277 VAC, Color Temperature: 4000 K, 70 CRI, Light Distribution: Type V Distribution, Color: White Textured	●	●			4.9
SGC604K	SGC-60-4K	840141419756	SGC Sling Canopy, Lamp Type: LED, Lamp Included: Yes, Light Output: 7,110 lm, Wattage: 55 W, Voltage Rating: 120-277 VAC, Color Temperature: 4000 K, 70 CRI, Light Distribution: Type V Distribution, Color: Dark bronze textured	●	●			4.9



NRG® 4000 LED Lumasquare® Series

Designed for illumination of commercial indoor/outdoor lowbay applications including: mechanical rooms, retail, covered loading docks and utility areas. The LED luminaire provides a cost effective and capable lighting solution while saving energy and providing general illumination for commercial and residential applications.

QS 10 **10-Day Quick-Ship Ordering Guide**
Order Limit Per Luminaire Selection: 15 (Contact factory for larger quantities)

CATALOG NUMBER	DESCRIPTION	CCT	WT. EACH	LMSS	WATTS
NRG-4-30LU-4K-035-BZ	Ceiling mount, 35W, 30 LEDs, 120-277V, Bronze	4000K	13.9	3355	35W
NRG-4-30LU-5K-035-BZ	Ceiling mount, 35W, 30 LEDs, 120-277V, Bronze	5000K	13.9	3543	35W
NRG-4-30LU-4K-BZ	Ceiling mount, 71W, 30 LEDs, 120-277V, Bronze	4000K	13.9	3355	35W
NRG-4-30LU-5K-BZ	Ceiling mount, 71W, 30 LEDs, 120-277V, Bronze	5000K	13.9	3543	35W

*DesignLights Consortium® (DLC) qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org

Vaportite® V Series

Wall mount or box/pendent, units completely assembled. Complete with glass globe and guard. Platinum powder finish.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
VBGG-150	VBGG-150	785988467167	Incandescent, Die-Cast Aluminum, Box/Pendant Mount, 120V, 150W, Platinum Silver, CUL	●		●	●	3
VWGG-150	VWGG-150	785988467181	Incandescent, Die-Cast Aluminum, Wall Mount, 120V, 150W, Platinum Silver, CUL	●	●	●	●	3.6
VGLGUARD	VGL-GUARD	–	Guard, Platinum Silver	●	●	●	●	.5
VGLBU	VGL-BU	78598841275	Globe, Frosted glass Lens	●	●	●	●	1
VGLFG	VGL-FG	78598841282	Globe, Frosted glass Lens	●	●	●	●	1
VGLGN	VGL-GN	78598841299	Globe, Frosted glass Lens	●	●	●	●	1
VGLRD	VGL-RD	78598841305	Globe, Frosted glass Lens	●	●	●	●	1
VGLYW	VGL-YW	78598841312	Globe, Frosted glass Lens	●	●	●	●	1

Vaportites VBGL/ VWGL

LED vaportite luminaires in versatile mounting options, a rugged design with high energy-efficiency.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
93092008	VBGL-1	785988030651	LED, Die-Cast Aluminum, 80 CRI, 4100K, 757 LMS, Box/Pendant Mount, Frosted glass Lens, 120-277V, 11W, 1 LED, 70 LPW, Platinum Silver, CUL	●		●	●	3.5
93092009	VWGL-1	785988030668	LED, Die-Cast Aluminum, 80 CRI, 4100K, 757 LMS, Wall Mount, Frosted glass Lens, 120-277V, 11W, 1 LED, 70 LPW, Platinum Silver, CUL	●		●	●	3.6

*DesignLights Consortium® (DLC) qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org

HUBBELL®
Outdoor Lighting

Marshal

Decorative Twin-Head LED Motion Sensor Kit.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
ML2L3K1DB	ML-2L3K-1-DB	785988032723	LED, Small, Die-Cast Aluminum, 83 CRI, 3000K, 2104 LMS, Wall Mount, Glass Lens, Wide Distribution, 0-10V Dimming, 120V, 26W, 2 LEDs, 79 LPW, Dark Bronze Textured, CSA	●	●	●	●	2.2
ML2L3K1WH	ML-2L3K-1-WH	785988032730	LED, Small, Die-Cast Aluminum, 83 CRI, 3000K, 2104 LMS, Wall Mount, Glass Lens, Wide Distribution, 0-10V Dimming, 120V, 26W, 2 LEDs, 79 LPW, White Textured, CSA	●	●	●	●	2.2
MSDB	MS-DB	785988032952	Occupancy sensor, 2.28" x 1.9" x 5.53", 120V, Dark Bronze Textured, CSA	●	●	●	●	.5
MSWH	MS-WH	785988032969	Occupancy sensor , 2.28" x 1.9" x 5.54", 120V, White, CSA	●	●	●	●	.5

NRG 300L

NRG 300L features a polycarbonate refractor that delivers 1500+ lumens at 4000K and 5000K and provides ambient lighting for safety and security to any facility. Vandal resistant design and vandal proof hardware make it perfect for non-supervised applications where energy savings, low maintenance and rugged construction are desired.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
93092004	NRG-356L-4K-U	785988031399	LED, Small, Die-Cast Aluminum, 70 CRI, 4000K, 1858 LMS, Wall Mount, Polycarbonate, Type III Distribution, 0-10V Dimming, 120-277V, 17W, 56 LEDs, 109 LPW, Dark Bronze Textured, UL	●		●	●	6
93092005	NRG-356L-4K-U-PC	785988031405	LED, Small, Die-Cast Aluminum, 70 CRI, 4000K, 1858 LMS, Wall Mount, Polycarbonate, Type III Distribution, 0-10V Dimming, 120-277V, 17W, 56 LEDs, 109 LPW, Dark Bronze Textured, UL, Photocontrol	●	●	●	●	6
93092006	NRG-356L-5K-U	785988031412	LED, Small, Die-Cast Aluminum, 70 CRI, 5000K, 1794 LMS, Wall Mount, Polycarbonate, Type III Distribution, 0-10V Dimming, 120-277V, 17W, 56 LEDs, 105 LPW, Dark Bronze Textured, UL	●		●	●	6
93092007	NRG-356L-5K-U-PC	785988031429	LED, Small, Die-Cast Aluminum, 70 CRI, 5000K, 1794 LMS, Wall Mount, Polycarbonate, Type III Distribution, 0-10V Dimming, 120-277V, 17W, 56 LEDs, 105 LPW, Dark Bronze Textured, UL, Photocontrol	●		●	●	6

*DesignLights Consortium® (DLC) qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org

PRS Perimashield

Compact stylish wallpack constructed of die-cast aluminum. Features impact resistant UV stabilized polycarbonate refractor. Mounts to standard 3– 3–1/2" junction boxes with 1/2" conduit entry for surface mount applications. Optional photocontrol available for dusk to dawn operations.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet	DLC QPL
93111053	PRS–20–4K–PC	840141419848	PRS Perimashield, Die-Cast Aluminum, 70 CRI, 4000K, 6615 LMS, Wall Mount, Polycarbonate Lens, Type IV Distribution, 0-10V Dimming, 120-277V, 22W, 180 LEDs, 129 LPW, 4000K, Dark Bronze Textured, Photocontrol, CSA	●	●			2.75		●
93111054	PRS–20–5K–PC	840141419855	PRS Perimashield, Die-Cast Aluminum, 70 CRI, 5000K, 6615 LMS, Wall Mount, Polycarbonate Lens, Type IV Distribution, 0-10V Dimming, 120-277V, 22W, 180 LEDs, 129 LPW, Dark Bronze Textured, Photocontrol, CSA	●	●			2.75		●
93115478	PRS–20–4K	840141419862	PRS Perimashield, Die-Cast Aluminum, 70 CRI, 4000K, 6615 LMS, Wall Mount, Polycarbonate Lens, Type IV Distribution, 0-10V Dimming, 120-277V, 22W, 180 LEDs, 129 LPW, 4000K, Dark Bronze Textured, CSA	●	●			2.75		●
93115479	PRS–20–5K	840141419879	RS Perimashield, Die-Cast Aluminum, 70 CRI, 5000K, 6615 LMS, Wall Mount, Polycarbonate Lens, Type IV Distribution, 0-10V Dimming, 120-277V, 22W, 180 LEDs, 129 LPW, 4000K, Dark Bronze Textured, CSA	●	●			2.75		●

Perimaliter®

The leader in wallpacks, the PVL Perimaliter® provides excellent performance with vandal resistant design. The sharp prisms capable on the door allow spacings of 6 times typical mounting heights of 12-15ft. Replaces up to 250W HID equivalent.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet	DLC QPL
93092002	PVL3-180L4K-U-DB	785988031368	LED, Large, Die-Cast Aluminum, 80 CRI, 4000K, 6615 LMS, Wall Mount, Acrylic Lens, Type IV Distribution, 0-10V Dimming, 120-277V, 72W, 180 LEDs, 92 LPW, Dark Bronze Textured, CSA	●		●	●	9.5		●
93092003	PVL3-180L5K-U-DB	785988031382	LED, Large, Die-Cast Aluminum, 80 CRI, 5000K, 6778 LMS, Wall Mount, Acrylic Lens, Type IV Distribution, 0-10V Dimming, 120-277V, 72W, 180 LEDs, 94 LPW, Dark Bronze Textured, CSA	●		●	●	5		●
9309200	PGM3-180L4K-U-DB	785988031351	LED, Large, Die-Cast Aluminum, 80 CRI, 4000K, 6923 LMS, Wall Mount, Glass Lens, Type IV Distribution, 0-10V Dimming, 120-277V, 72W, 180 LEDs, 87 LPW, Dark Bronze Textured, CSA	●		●	●	10		●
93092001	PGM3-180L5K-U-DB	785988031375	LED, Large, Die-Cast Aluminum, 80 CRI, 5000K, 8064 LMS, Wall Mount, Glass Lens, Type IV Distribution, 0-10V Dimming, 120-277V, 72W, 180 LEDs, 112 LPW, Dark Bronze Textured, CSA	●		●	●	10		●

QS 10 — 10-Day Quick-Ship Ordering Guide
Order Limit Per Luminaire Selection: 15 (Contact factory for larger quantities)

[ ] - 180LU - [ ] - [ ] - U - [ ] - [ ]

SERIES	NUMBER OF LEDS	CCT	DRIVE CURRENT	VOLTAGE	FINISH	OPTIONS
PGM3 Glass Refractor **PVL3** Polycarbonate Refractor	**180LU** 180 LEDs	**4K** 4000K nominal **5K** 5000K nominal	**BLANK** -700mA **035** -350mA	**U** 120V-277V	**DB** Dark Bronze Textured **WH** White Textured	**PC(X)** Button photo-control, replace X with voltage, specify 1-120V, 2-208V, 3-240V, 4-277V

*DesignLights Consortium® (DLC) qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org

WGH Switchable Glass Refractor Wallpack

Featuring switchable lumen and wattage technology. Borosilicate glass refractor softens LED and provides uniform distribution. Field switchable lumens and LED color temperature (4000K, 4500K, & 5000K); wall mount at heights from 15-25ft.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
93131680	WGH2-LSCS	84014147950	LED, Medium, Die-Cast Aluminum, 80 CRI, switchable 4000K, 4500K, & 5000K, 4600-10,000 LMS, Wall Mount, Glass Lens, Type IV Distribution, 0-10V Dimming Driver, 120-277V, 30-70W, up to 142 LPW, Dark Bronze Textured, CSA	●	●			10.8
93131681	WGH3-LSCS	84014147967	LED, Large, Die-Cast Aluminum, 80 CRI, switchable 4000K, 4500K, & 5000K, 11,500-17,200 LMS, Wall Mount, Glass Lens, Type IV Distribution, 0-10V Dimming Driver, 120-277V, 80-120W, up to 143 LPW, Dark Bronze Textured, CSA	●	●			13.89

WGH Glass Refractor Wallpack Series

Borosilicate glass refractor wallpacks provide safety and security lighting. Wall mount at heights from 15-25ft. Refractor spreads light and softens light source image. Available in energy-efficient LED and 150-250 watt traditional sources.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
WGH304KUS	WGH-30-4K-U-S	785988044559	LED, Small, Die-Cast Aluminum, 80 CRI, 4000K, Wall Mount, Glass Lens, Type IV Distribution, 0-10V Dimming Driver, 120-277V, 28W, 119 LPW, Dark Bronze Textured, ETL	●	●	●	●	6.75
WGH305KUS	WGH-30-5K-U-S	785988044566	LED, Small, Die-Cast Aluminum, 80 CRI, 5000K, Wall Mount, Glass Lens, Type IV Distribution, 0-10V Dimming Driver, 120-277V, 28W, 121 LPW, Dark Bronze Textured, ETL	●	●	●	●	6.75
WGH404KUS	WGH-40-4K-U-S	785988044573	LED, Small, Die-Cast Aluminum, 80 CRI, 4000K, Wall Mount, Glass Lens, Type IV Distribution, 0-10V Dimming Driver, 120-277V, 40W, 110 LPW, Dark Bronze Textured, ETL	●	●	●	●	6.75
WGH405KUS	WGH-40-5K-U-S	785988044580	LED, Small, Die-Cast Aluminum, 80 CRI, 5000K, Wall Mount, Glass Lens, Type IV Distribution, 0-10V Dimming Driver, 120-277, 40W, 113 LPW, Dark Bronze Textured, ETL	●	●	●	●	6.75
WGH110L4KUM	WGH-110L-4K-U-M	785988031139	LED, Medium, Die-Cast Aluminum, 80 CRI, 4000K, 6170 LMS, Wall Mount, Glass Lens, Type IV Distribution, 0-10V Dimming Driver, 120-277V, 54W, 110 LEDs, 113 LPW, Dark Bronze Textured, CSA	●	●	●	●	11
WGH110L5KUM	WGH-110L-5K-U-M	785988032990	LED, Medium, Die-Cast Aluminum, 80 CRI, 5000K, 6372 LMS, Wall Mount, Glass Lens, Type IV Distribution, 0-10V Dimming Driver, 120-277V, 54W, 110 LEDs, 118 LPW, Dark Bronze Textured, CSA	●	●	●	●	11
WGH133L4KUM	WGH-133L-4K-U-M	785988044597	LED, Medium, Die-Cast Aluminum, 80 CRI, 4000K, Wall Mount, Glass Lens, Type IV Distribution, 0-10V Dimming Driver, 120-277V, 76W, 118 LPW, Dark Bronze Textured, ETL	●	●	●	●	11
WGH133L5KUM	WGH-133L-5K-U-M	785988044603	LED, Medium, Die-Cast Aluminum, 80 CRI, 5000K, Wall Mount, Glass Lens, Type IV Distribution, 0-10V Dimming Driver, 120-277V, 76W, 120 LPW, Dark Bronze Textured, ETL	●	●	●	●	11
WGH225L4KCL	WGH-225L-4K-C-L	78598831559	LED, Large, Die-Cast Aluminum, 80 CRI, 4000K, 11,838 LMS, Wall Mount, Glass Lens, Type IV Distribution, 0-10V Dimming Driver, 347/480V, 102W, 225 LEDs, 116 LPW, Dark Bronze Textured, CSA	●		●	●	19
WGH225L4KUL	WGH-225L-4K-U-L	785988031146	LED, Large, Die-Cast Aluminum, 80 CRI, 4000K, 11,838 LMS, Wall Mount, Glass Lens, Type IV Distribution, 0-10V Dimming Driver, 120-277V, 102W, 225 LEDs, 116 LPW, Dark Bronze Textured, CSA	●	●	●	●	19
WGH225L5KUL	WGH-225L-5K-U-L	785988033003	LED, Large, Die-Cast Aluminum, 80 CRI, 5000K, 12,138 LMS, Wall Mount, Glass Lens, Type IV Distribution, 0-10V Dimming Driver, 120-277V, 102W, 225 LEDs, 119 LPW, Dark Bronze Textured, CSA	●	●	●	●	19

*DesignLights Consortium® (DLC) qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org



Fresno Square or Round Bollard

Classic square or round bollards, designed to illuminate walkways and courtyards.

10-Day Quick-Ship Ordering Guide
Order Limit Per Luminaire Selection: 15 (Contact factory for larger quantities)

[ ] - [ ] - [DB]

SERIES		SOURCE/WATTAGE		COLOR	
FN1	Fresno Square	LED		DB	Dark Bronze Textured
FN2	Fresno Round	12LU-3K	12 LEDs, 31W, asymmetric distribution, 3000K, 120-277V, 50/60 Hz		
		12LU-5K	12 LEDs, 31W, asymmetric distribution, 5000K, 120-277V, 50/60 Hz		
		24LU-3K	24 LEDs, 62W, symmetric distribution, 3000K, 120-277V, 50/60 Hz		
		24LU-5K	24 LEDs, 62W, symmetric distribution, 5000K, 120-277V, 50/60 Hz		

Poles

Square Straight Steel Poles.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet
SSSH2040A4HVDBRDC	SSSH20-40A-4-HV-DB-RDC	–	"Square Steel pole, 20', 4"" square cross-section, 1/8"" wall thickness; Dark Broaze paint (DB)"	●	●	●	●		
The above consists of (5) shipable components:									
SSSH2040A4HVDBWPO	SSSH20-40A-4-HV-DB-WPO	785988 3896 1	"Square Steel pole, 20', 4"" square, 1/8"" wall shaft / base weldment only. (DB)"	●	●	●	●	142	
TAB30M38	TAB30M38	785988 49698 3	"Anchor bolts (only): 3/4" x 30" x 3" anchor bolt set (four bolts with hardware)"	●	●	●	●	15	
93062959	TMPLT-SSS-X-XX POLES	785988 03205 1	"Template (only): anchor bolt details for square steel poles (DO NOT USE ON OTHER POLE DESIGNS)"	●	●	●	●		
SBC4DB	SBC4-DB	785988 72747 6	"Base cover (only): for 4" square steel poles (10 1/2" square x 5" deep). (DB)"	●	●	●	●	2	
20102389702	"201-0238-9702 4IN SQUARE PLASTIC END CAP"	785988 00448 5	Pole cap (only): for 4" square poletop cap	●	●	●	●	1	
SSSH2540A4HVDBRDC	SSSH25-40A-4-HV-DB-RDC	none	"Square Steel pole, 25', 4"" square cross-section, 1/8"" wall thickness; Dark Broaze paint (DB)"	●	●	●	●		
The above consists of (5) shipable components:									
SSSH2540A4HVDBWPO	SSSH25-40A-4-HV-DB-WPO	785988 3897 8	"Square Steel pole, 25', 4"" square, 1/8"" wall shaft / base weldment only. (DB)"	●	●	●	●	142	
TAB30M38	TAB30M38	785988 49698 3	"Anchor bolts (only): 3/4" x 30" x 3" anchor bolt set (four bolts with hardware)"	●	●	●	●	15	
93062959	TMPLT-SSS-X-XX POLES	785988 03205 1	"Template (only): anchor bolt details for square steel poles (DO NOT USE ON OTHER POLE DESIGNS)"	●	●	●	●		
SBC4DB	SBC4-DB	785988 72747 6	"Base cover (only): for 4" square steel poles (10 1/2" square x 5" deep). (DB)"	●	●	●	●	2	
20102389702	"201-0238-9702 4IN SQUARE PLASTIC END CAP"	785988 00448 5	Pole cap (only): for 4" square poletop cap	●	●	●	●	1	

*DesignLights Consortium® (DLC) qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org

Poles (continued)

10-Day Quick-Ship Ordering Guide
Order Limit Per Luminaire Selection: 15 (Contact factory for larger quantities)

[ ] - [ ] - [ ] - [ ] - [ ]



CROSS SECTION
- SSS-H-16-40-A
- SSS-H-20-40-A
- SSS-H-25-40-A
- SSS-H-30-40-B

LUMINAIRE MOUNTING TYPE[1]
- 1 Single arm mount
- 2 Two fixtures at 180°
- 2L Two fixtures at 90°
- 3T Three fixtures at 90°
- 4 Four fixtures at 90°
- TA Tenon (2 3/8" OD)
- TB Tenon (2 7/8" OD)
- TC Tenon (3.5" OD)
- TR Removable Tenon (2.375 x 4.25)
- OT No drilling (includes pole cap)

DRILL PATTERN
- S2 2 Bolt, 3 ½" Pattern
- B3 2 Bolt, 2 ½" Pattern (Ratio)

FINISH
- BL Black Textured
- DB Dark Bronze Textured
- PS Platinum Silver Smooth
- GYS Light Gray Smooth
- WH White Textured

OPTIONS
- VM2 2nd mode vibration damper
- LAB Less anchor bolts

1 **DRILL PATTERNS: Compatible for Hubbell Outdoor luminaires**
2 **Specify option location using logic found in spec sheet; The location of all options must start a minimum of six inches above the hand hole and be located one foot apart from one another; Consult factory for any exceptions**
3 **Removable tenon used in conjunction with side arm mounting, specify desired arm configuration first followed by "TR" notation. Example: SSS-S-25-40-A-1-S2-TR-DB**

ORDERING INFORMATION

Catalog Number	Height		Nominal Shaft Dimensions	Wall Thickness	Bolt Circle (suggested)	Bolt Circle (range)	Bolt Square (range)	Base Plate Square	Anchor bolt size	Bolt Projection	Pole weight
	Feet	Meters									
SSS-H-16-40-A-XX-XX	16	4.9	4" square	0.125"	9"	8" - 10"	5.66" - 7.07"	9"	3/4" x 30" x 3"	3.5	116
SSS-H-20-40-A-XX-XX	20	6.1	4" square	0.125"	9"	8" - 10"	5.66" - 7.07"	9"	3/4" x 30" x 3"	3.5	142
SSS-H-25-40-A-XX-XX	25	7.6	4" square	0.125"	9"	8" - 10"	5.66" - 7.07"	9"	3/4" x 30" x 3"	3.5	175
SSS-H-30-40-B-XX-XX	30	9.1	4" square	.188"	11"	10" - 12"	7.07" - 8.48"	10.50"	3/4" x 30" x 3"	3.5	304

[1] Allowable EPA with 1.3 gust factor. To determine max. pole loading weight, multiply allowable EPA by 30 lbs. Published allowable EPA values based upon calculations of Spaulding Lighting. Allowable EPA values for projects requiring AASHTO methodology are available upon request.

Note Factory supplied template must be used when setting anchor bolts. Hubbell Lighting will deny any claim for incorrect anchorage placement resulting from failure to use factory supplied template and anchor bolts.

Pole Accessories

10-Day Quick-Ship Ordering Guide
Order Limit Per Luminaire Selection: 15 (Contact factory for larger quantities)

Catalog Number	Description	EPA ft² (m²)	Weight lbs. (kg)
For use with: ARA3, CL1, CL1S, CR1, MAA, MSV, RCS, and RCL (#2 Drill Pattern)			
SETA2-XX	4" Square pole top tenon adapter; 2 3/8" OD slipfitter for four fixtures (90°)	0.4 (0.04)	22 (10)
RETA2-XX	2-3/8" to 2-7/8" tenon top adapter for 4" round straight steel pole	0.4 (0.04)	22 (10)
VM1-4-DB	Vibration Damper	.10	5 (2.2)

Replace **XX** with color designation
- **BL** Black Textured
- **DB** Dark Bronze Textured

*DesignLights Consortium® (DLC) qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org

Options and Accessories

Steel and Cast Iron Brackets

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
4024C	4024C	785988310326	Steel Slipfitter, 2" Pipe, Steel, Dark Bronze Textured	●	●	●	●	4
BHH3180PT20DB	BHH-3180-PT20-DB	785988041251	Pole Top Bracket, Dark Bronze Textured	●	●	●	●	4
S302M51	S-302-M51	785988473861	Slip-fitter, 1/2" Hub, 2 3/8" Slip fit, Die-Cast Aluminum, Dark Bronze Textured	●	●	●	●	1
SBC4DB	SBC4-DB	785988727476	Pole Base Cover, 10 1/2" square x 5" deep	●	●	●	●	4
SSST4DB	SSS-T4-DB	785988727452	Pole Tenon Adapter, Fits 4" Square Pole	●	●	●	●	5
TCB1	TCB-1	785988496501	Wood Pole Clamp, 6" and 12" Dia., Steel, Dark Bronze Textured	●	●	●	●	10
TPR4	TPR-4	785988500505	Flood Tenon Reducer, Steel, Dark Bronze Textured	●	●	●	●	7
TRNDB	TRN-DB	785988030446	Trunnion, Die-Cast Aluminum, Dark Bronze Textured	●	●	●	●	7
TWK11	TWK-11	785988502202	Wall Bracket, Aluminum	●	●	●	●	5
4040	4040	785988310555	Steel Wall/Pole Mounting Bracket, Steel, Dark Bronze Textured	●	●	●	●	8
4041	4041	785988310579	Steel Wall/Pole Mounting Bracket, Steel, Dark Bronze Textured	●	●	●	●	8
20102389702	201-0238-9702 4IN SQUARE PLASTIC END CAP	785988004485	Pole Cap, 4"	●	●	●	●	1
BHH2180PT20DB	BHH-2180-PT20-DB	785988041244	Pole Top Bracket, Dark Bronze Textured	●	●	●	●	5
S302	S-302	785988473854	Slip-fitter, 1/2" Hub, 2 3/8" Slip fit, Die-Cast Aluminum, Textured Gray	●	●	●	●	1
TAB30M38	TAB-30-M38	785988496983	Anchor Bolts, 3/4 in x 30 in x 3 in	●	●	●	●	15
TAB36M38	TAB-36-M38	785988496938	Anchor Bolts, 1 in x 36 in x 4 in	●	●	●	●	35
93062959	TMPLT-SSS-X-XX POLES	785988032051	Anchor Bolt Template	●	●	●	●	.125

Photocontrol

Button, Stem, Twistlock and Remote Controls for dusk to dawn lighting

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each
PBT1	PBT-1	785988260119	Photocontrol, 120V	●	●	●	●	.5
PBT234	PBT-234	785988260157	Photocontrol, 208/240/277V	●	●	●	●	.5

*DesignLights Consortium® (DLC) qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org

Sportsliter Series Luminaire

Integral Ballasted, Axial and Horizontal

10-Day Quick-Ship Ordering Guide
Order Limit Per Luminaire Selection: 15 (Contact factory for larger quantities)

SLS - [ ] - 1 [ ] [ ] - WH - [ ]

SERIES
SLS Sportsliter

WATTAGE/SOURCE
1000P 1000w PS Metal Halide
1500H 1500w Metal Halide

BALLAST
1 HPF

BEAM DISTRIBUTION
N Narrow
M Medium
W Wide
2 NEMA Type 2
3 NEMA Type 3
4 NEMA Type 4
5 NEMA Type 5
6 NEMA Type 6

VOLTAGE
5 480V
8 QuadTap (120, 208, 240,277)

OPTION
Blank None
V2 12" External Visor (shipped separately)

LAMP
Blank None
L Lamp (shipped separately)

SLS-LV

SLS-V2



TCA-R2



TCA-R3

Sportslighting Mounting Accessories



TCA-R4



TCA-W2

TCA-W3



TCA-W4

10-Day Quick-Ship Ordering Guide
Order Limit Per Luminaire Selection: 15 (Contact factory for larger quantities)

CATALOG NUMBER	DESCRIPTION
850-0163-0104	Door frame, Lens assembly
SLSV2	Visor
TCAR2	Mounting bracket, Crossarm, Round steel pole, 2 Fixture
TCAR3	Mounting bracket, Crossarm, Round steel pole, 3 Fixture
TCAR4	Mounting bracket, Crossarm, Round steel pole, 4 Fixture
TCAW2	Mounting bracket, Crossarm, Wood Pole, 2 Fixture
TCAW3	Mounting bracket, Crossarm, Wood Pole, 3 Fixture
TCAW4	Mounting bracket, Crossarm, Wood Pole, 4 Fixture

*DesignLights Consortium® (DLC) qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org

ArcheType® X Advantage

Fewest Fixtures wins...

With ArcheType® X, not only do you get cost savings from improved efficiency and uniformity, there are thousands of dollars in savings per pole eliminated because of the reduced cost of trenching, wiring, controls, sensors, installation and maintenance.

Traditional Fixtures

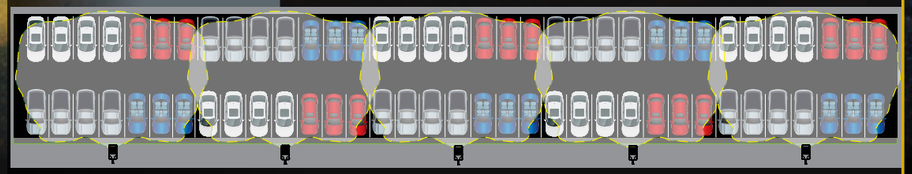

Type X Fixtures

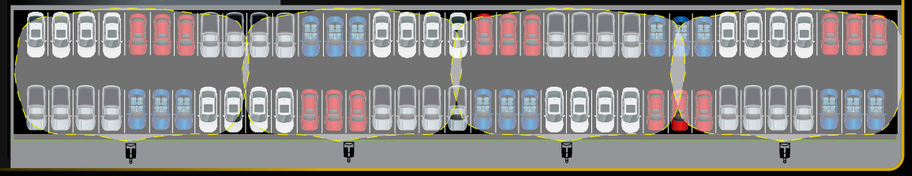

For the same size parking lot Type X requires only 4 fixtures.

ARX09 - ArcheType® X Site/Area

ArcheTypeX unique optical system allows designers and specifiers to tailor-fit lighting to meet the unique illumination needs of a site. ArcheType X user-defined distributions are perfect for unusually shaped sites with hard to light corners.

10-Day Quick-Ship Ordering Guide
Order Limit Per Luminaire Selection: 25 (Contact factory for larger quanities)

ARX09QS		4K			DB	ST	
FIXTURE	DISTRIBUTION	ELECTRICAL MODULE			FINISH	ARM SUP-PORT	ARM
	1 Type I	Color Temp.	Drive Current	Voltages	DB Dark Bronze	ST Straight	For SQ_POLE Square Pole
	2 Type II	4K 4000K	35 350mA	UV 120-277V			For 4" RD_POLE Round Pole
	3 Type III		40 400mA	347 347V			
	4 Type IV		45 450mA	480 480V			
	5 Type V		50 500mA				
	L Left		55 550mA				
	R Right		60 600mA				
			65 650mA				
			70 700mA				

For Pole Spec Select: http://www.kimlighting.com/products/arms_and_poles/
For Control Spec Select: http://trpssl.com/index.html

ARX16 - ArcheType® X Site/Area

ArcheTypeX unique optical system allows designers and specifiers to tailor-fit lighting to meet the unique illumination needs of a site. ArcheType X user-defined distributions are perfect for unusually shaped sites with hard to light corners.

10-Day Quick-Ship Ordering Guide
Order Limit Per Luminaire Selection: 25 (Contact factory for larger quanities)

ARX16QS		4K			DB	ST	
FIXTURE	DISTRIBUTION	ELECTRICAL MODULE			FINISH	ARM SUP-PORT	ARM
	1 Type I	Color Temp.	Drive Current	Voltages	DB Dark Bronze	ST Straight	For SQ_POLE Square Pole
	2 Type II	4K 4000K	35 350mA	UV 120-277V			For 4" RD_POLE Round Pole
	3 Type III		40 400mA	347 347V			
	4 Type IV		45 450mA	480 480V			
	5 Type V		50 500mA				
	L Left		55 550mA				
	R Right		60 600mA				
			65 650mA				
			70 700mA				

For Pole Spec Select: http://www.kimlighting.com/products/arms_and_poles/
For Control Spec Select: http://trpssl.com/index.html

WARP9® LED with PicoPrism®

The WARP9® slim, low-profile site luminaire blends seamlessly into the background, allowing the natural beauty of the architecture to remain the focal point. The WARP9® features IP 66 certification, 0-10V dimming and full cutoff.

10-Day Quick-Ship Ordering Guide
Order Limit Per Luminaire Selection: 25 (Contact factory for larger quanities)

FIXTURE	SOURCE	VOLTAGE	FIXTURE FINISH	ARM
WP9S3P70 Type III, 700mA	**60L4K** 60LED 4000K	**120** 120V	**BL** Black	**For SQ_POLE** Square Pole
WP9L3P70 Type III, 700mA	**120L4K** 120LED 4000K	**208** 208V	**DB** Dark Bronze	**For 4" RD_POLE** Round Pole*
		240 240V	**SG** Stealth Gray	
		277 277V	**PS** Platinum Silver	
		347 347V		
		480 480V		

*Will fit 4" to 5" poles



WARP9® LED with PicoEmitter®

The WARP9® slim, low-profile site luminaire blends seamlessly into the background, allowing the natural beauty of the architecture to remain the focal point. The WARP9® features IP 66 certification, 0-10V dimming and full cutoff.

10-Day Quick-Ship Ordering Guide
Order Limit Per Luminaire Selection: 25 (Contact factory for larger quanities)

FIXTURE	SOURCE	VOLTAGE	FIXTURE FINISH	ARM
WP9S3E35 Type III, 350mA	**60L4K** 60LED 4000K	**120** 120V	**BL** Black	**For SQ_POLE** Square Pole
WP9L3E35 Type III, 350mA	**120L4K** 120LED 4000K	**208** 208V	**DB** Dark Bronze	**For 4" RD_POLE** Round Pole*
		240 240V	**SG** Stealth Gray	
		277 277V	**PS** Platinum Silver	
		347 347V		
		480 480V		

*Will fit 4" to 5" poles

The Archetype® LED with PicoEmitter®

Since 1989, the eclectic shape of The Archetype, Kim Lighting's classic site/area luminaire has been complementing contemporary architectural design. The Archetype features lumen output of up to 17,800 lumens, tool-less entry and is IP66 certified.

10-Day Quick-Ship Ordering Guide
Order Limit Per Luminaire Selection: 25 (Contact factory for larger quanities)

FIXTURE	SOURCE	VOLTAGE	FIXTURE FINISH	ARM
SAR3E35 Type III, 350mA	**60L4K** 60LED 4000K	**120** 120V	**BL** Black	**For SQ_POLE** Square Pole
AR3E35 Type III, 350mA	**120L4K** 120LED 4000K	**208** 208V	**DB** Dark Bronze	**For 4" RD_POLE** Round Pole*
		240 240V	**SG** Stealth Gray	
		277 277V	**PS** Platinum Silver	
		347 347V		
		480 480V		

*Will fit 4" to 5" poles

KRS - Round Steel Poles, 4" (Non Tapered)

Poles include pre-drilled for any mounting configuration, galvanized solid steel anchor bolts, and standard base cover. Poles 25' and higher include internal vibration dampening system.

10-Day Quick-Ship Ordering Guide
Order Limit Per Luminaire Selection: 25 (Contact factory for larger quanities)

LENGTH	GAUGE/MOUNT	FIXTURE FINISH
KRS14 14 ft.	**4120A** 4" x 11 Gauge, single mount	**BL** Black
KRS20 19.5 ft.		**DB** Dark Bronze
		SG Stealth Gray
		PS Platinum Silver

Micro Flood®

Micro Flood® has a unique swivel mount that provides superior aiming without loosening over time and is constructed out of die-cast aluminum with powder coat paint finish for excellent value and rugged service.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet
EL218F3/8L3KUV/BL	EL218F3/8L3KUV/BL	785988040216	LED, Die-cast Aluminum, 72 CRI, 3000K, 651 LMS, Ground, Tempered Glass, Flood, 0-10V, UV, 10W, 8 LEDs, Black, Wet Location	●				0.41	
EL218F3/8L3KUV/DB	EL218F3/8L3KUV/DB	785988040223	LED, Die-cast Aluminum, 72 CRI, 3000K, 651 LMS, Ground, Tempered Glass, Flood, 0-10V, UV, 10W, 8 LEDs, Dark Bronze, Wet Location	●				0.4	
EL218S3/8L3KUV/BL	EL218S3/8L3KUV/BL	785988040254	LED, Die-cast Aluminum, 72 CRI, 3000K, 1317 LMS, Ground, Tempered Glass, Spot, 0-10V, UV, 10W, 8 LEDs, Black, Wet Location	●				2.5	
EL218F3/8L3KUV/GR	EL218F3/8L3KUV/GR	785988040230	LED, Die-cast Aluminum, 72 CRI, 3000K, 651 LMS, Ground, Tempered Glass, Flood, 0-10V, UV, 10W, 8 LEDs, Green, Wet Location	●				0.3	
EL218F3/8L4KUV/BL	EL218F3/8L4KUV/BL	785988040247	LED, Die-cast Aluminum, 72 CRI, 3000K, 651 LMS, Ground, Tempered Glass, Flood, 0-10V, UV, 10W, 8 LEDs, Black, Wet Location	●				0.44	
EL700S3/12L3KUV/BL	EL700S3/12L3KUV/BL	785988040292	LED, Die-cast Brass or Die-cast Aluminum, 72 CRI, Ground, 918 LMS, Ground, Tempered Glass, Spot, 12 LEDs, Black, Wet Location	●				0.43	
BD215BL	BD215BL	785988040131	Barn Door for Micro-Flood, Black	●				1.2	
FH215BL	FH215/BL	785988040339	CRI, Wet Location	●				0.18	

Ravenna Highlighter

Ravenna Highlighter is highly adaptable to landscape path lighting solutions. Elegance and style in leaf-like design blends into natural surroundings.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet
BNL176NB	BNL176NB	785988040155	LED, Die-cast Brass, 72 CRI, 3000K, 394 LMS, Ground, Glass, Flood, 120V, 10W, 3 LEDs, Natural Brass, Wet Location	●				1.25	
ELL171BL	ELL171BL	785988040308	LED, Wet Location	●				0.15	
KLV176/3L3K/NB	KLV176/3L3K/NB	785988040674	LED, Large, Natural Brass, 72 CRI, 3000K, 4000K, 5000K, 800 LMS, Ground, Tempered Glass, Flood, 12V, 10W, 3 LEDs, Natural Brass, Wet Location	●				1	
KLVL171BL	KLVL171BL	785988040667	LED, Ground Mount, Die-cast Aluminum, 72 CRI, 3000K, 394 LMS, Ground, Tempered Glass, Flood, 12V, 10W, 3 LEDs, Black, Wet Location	●				0.34	
KLVL176NB	KLVL176NB	785988040674	LED, Ground Mount, Die-Cast Brass, 72 CRI, 3000K, 394 LMS, Ground, Tempered Glass, Flood, 12V, 10W, 3 LEDs, Natural Brass, Wet Location	●				0.31	

Ravenna Lowlighter

Ravenna Lowlighter is highly adaptable to landscape accent lighting solutions. Elegance and style in leaf-like design blends into natural surroundings.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet
BNL276NB	BNL276NB	785988040162	LED, Die-cast Brass, 72 CRI, 3000K, 394 LMS, Ground, Glass, Flood, 120V, 10W, 3 LEDs, Natural Brass, Wet Location	●				6.1	
ELL271BL	ELL271BL	785988040315	LED, Wet Location	●				0.5	
KLVL271BL	KLVL271BL	785988040728	LED, Ground Mount, Die-cast Aluminum, 72 CRI, 3000K, 394 LMS, Ground, Tempered Glass, Flood, 12V, 10W, 3 LEDs, Black, Wet Location	●				0.34	
KLVL276NB	KLVL276NB	785988040735	LED, Ground Mount, Die-Cast Brass, 72 CRI, 3000K, 394 LMS, Ground, Tempered Glass, Flood, 12V, 10W, 3 LEDs, Natural Brass, Wet Location	●				1.5	

Round Hood

A unique swivel mount provides superior aiming without loosening over time and is constructed out of die-cast aluminum with powder coat paint finish for excellent value and rugged service.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet
KLVL202BL	KLVL202BL	785988040681	LED, Ground Mount, Die-cast Aluminum, 72 CRI, 3000K, 394 LMS, Ground, Tempered Glass, Flood, 12V, 10W, 3 LEDs, Black, Wet Location	●				0.31	
KLVL202GR	KLVL202GR	785988040698	LED, Ground Mount, Die-cast Aluminum, 72 CRI, 3000K, 394 LMS, Ground, Tempered Glass, Flood, 12V, 10W, 3 LEDs, Green, Wet Location	●				0.31	

Scarab Series

The Scarab Series combines integrated design and application flexibility to produce a landscape accent system that meets the broadest range of illumination needs.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet
C700F3/12L3KUV/NB	C700F3/12L3KUV/NB	–	LED, Die-cast Brass, 72 CRI, 3000K, 4000K, 5000K, 502 LMS, 661 LMS, 741 LMS, Ground, Tempered Glass, Flood, UV, 9W, 9 LEDs, Natural Brass, Wet Location	●	●			4	
C700F3/7L3KUV/NB	C700F3/7L3KUV/NB	785988040193	LED, Die-cast Brass, 72 CRI, 3000K, 4000K, 5000K, 502 LMS, 661 LMS, 741 LMS, Ground, Tempered Glass, Flood, UV, 9W, 9 LEDs, Natural Brass, Wet Location	●				6.1	
C700F3/9L3KUV/NB	C700F3/9L3KUV/NB	–	LED, Die-cast Brass, 72 CRI, 3000K, 4000K, 5000K, 502 LMS, 661 LMS, 741 LMS, Ground, Tempered Glass, Flood, UV, 9W, 9 LEDs, Natural Brass, Wet Location	●	●			2.75	
EL700F3/12L3KUV/BL	EL700F3/12L3KUV/BL	785988040261	LED, Die-cast Brass or Die-cast Aluminum, 72 CRI, Ground, 502 LMS, Ground, Tempered Glass, Flood, 12 LEDs, Black, Wet Location	●				0.1	
EL700F3/7L3KUV/BL	EL700F3/7L3KUV/BL	785988040278	LED, Die-cast Brass or Die-cast Aluminum, 72 CRI, Ground, 806 LMS, Ground, Tempered Glass, Flood, 7 LEDs, Black, Wet Location	●				0.1	
KLVL711BL	KLVL711BL	785988040742	LED, Ground Mount, Die-cast Aluminum, 72 CRI, 3000K, 394 LMS, Ground, Tempered Glass, Flood, 12V, 10W, 3 LEDs, Black, Wet Location	●				1.31	
KLVL716NB	KLVL716NB	785988040759	LED, Ground Mount, Die-Cast Brass, 72 CRI, 3000K, 394 LMS, Ground, Tempered Glass, Flood, 12V, 10W, 3 LEDs, Black, Wet Location	●				1.5	

Square Hood

The Square Hood Series has a unique swivel mount that provides superior aiming without loosening over time and is constructed out of die-cast aluminum with powder coat paint finish for excellent value and rugged service.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet
KLVL206BL	KLVL206BL	785988040704	LED, Ground Mount, Die-cast Aluminum, 72 CRI, 3000K, 394 LMS, Ground, Tempered Glass, Flood, 12V, 10W, 3 LEDs, Black, Wet Location	●				0.31	
KLVL206GR	KLVL206GR	785988040711	LED, Ground Mount, Die-cast Aluminum, 72 CRI, 3000K, 394 LMS, Ground, Tempered Glass, Flood, 12V, 10W, 3 LEDs, Green, Wet Location	●				0.31	

Traditional

The under-hood reflector increases efficiency while the solid hood support allows access for lamp maintenance without the use of a single tool. The wide selection of hood designs, stem lengths and finishes, provides the perfect solution to any application.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet
BN192/3L3KUV/NB	BN192/3L3KUV/NB	785988040148	LED, Die-cast Brass, 72 CRI, 3000K, 4000K, 5000K57, 67, 71, Ground, Glass, Flood, UV, 5W, 3 LEDs, Natural Brass, Wet Location	●				1.25	
EL190/3L3KUV/BL	KLV721/3L5K/DB	78598844153	LED, Die-cast Aluminum, 72 CRI, 3000K, 502 LMS, Ground, Tempered Glass, Flood Distribution, UV, 5W, 3 LEDs, Black, Wet Location	●				0.34	
EL190/3L3KUV/BL	EL190/3L3KUV/BL	785988040209	LED, Die-cast Aluminum, 72 CRI, 3000K, 502 LMS, Ground, Tempered Glass, Flood, UV, 5W, 3 LEDs, Black, Wet Location	●				0.754	
KLV190/3L3K/BL	KLV190/3L3K/BL	785988040551	LED, Die-cast Aluminum, 72 CRI, 3000K, 4000K, 5000K, 350 LMS, Ground, Tempered Glass, Flood, 12V, 4W, 3 LEDs, Black, Wet Location	●				1.5	
KLV192/3L3K/NB	KLV192/3L3K/NB	785988040568	LED, Natural Brass, 3000K, 4000K, 5000K, 350 LMS, Ground, Tempered Glass, Flood, 12V, 4W, 3 LEDs, Wet Location	●				1.5	
H80BL	H80BL	785988040384	Cone Hood for Traditional, Cast Aluminum, Black	●				1.5	
H70BL	H70BL	785988040360	Mushroom Hood for Traditional, Spun Copper, Black	●				1.5	
H70NB	H70NB	785988040377	Mushroom Hood for Traditional, Spun Copper, Natural Copper	●				1.5	
H60BL	H60BL	785988040346	Pagoda Hood for Traditional, Spun Aluminum, Black	●				1.5	
H60NB	H60NB	785988040353	Pagoda Hood for Traditional, Spun Copper, Natural Copper	●				1.5	

Well Light

Well lights withstand the corrosive forces of water, soil and time. C54 is now available with an IP68 rated energy efficient 11W LED light engine.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet
C54F3/9L3KUV	C54F3/9L3KUV	785988040186	LED, Spun Copper and Cast Aluminum, 72 CRI, 3000K, 4000K, 5000K, 502 LMS, 661 LMS, 741 LMS, In-grade, Tempered Glass, Flood, UV, 11W, 9 LEDs, Silver and Black, Wet Location	●				6.1	

12V/120V Landscape Accessories

Kim Lighting's Landscape Collection includes a full complement of mounting options to accommodate any application. Refer to specifications for product compatibility and limitations.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet
JBR-21	JBR-21	785988040438	J-Box, Die-cast Brass, In-grade, Natural Brass, Wet Location	●				0.18	
JBR-4	JBR-4	785988040469	J-Box, Wet Location	●				0.15	
JBR-24	JBR-24	785988040445	J-Box, In-grade, Wet Location	●				0.18	
JBR-2	JBR-2	785988040421	J-Box, Die-cast Brass, In-grade, 120V, Natural Brass, Wet Location	●				0.18	
JW/BL-P	JW/BL-P	785988040520	J-Box, Die-cast Aluminum, Black, Wet Location	●				0.15	
JBR30	JBR30	785988040476	J-Box, Die-Cast Brass, Ground, 120V, Natural Brass, Wet Location	●				0.8	
JBR32	JBR32	785988040513	J-Box, Die-Cast Brass, Natural Brass, Wet Location	●				1.36	
JB1/BL-P	JB1/BL-P	785988040414	J-Box, Cast Aluminum, Black, Wet Location	●				0.18	
JBR-3	JBR-3	785988040452	Fluorescent, J-Box, Die-Cast Brass, 120V, Wet Location	●				1.5	
JWBR/NB	JWBR/NB	–	Wall Mount, Die-Cast Brass, Natural Brass	●				0.15	
JW/WH-P	JW/WH-P	–	J-Box, Die-cast Aluminum, White, Wet Location	●				0.31	
J-27N/BL-P	J-27N/BL-P	785988040407	Surface Mount, Die-cast Aluminum, Black	●				0.18	
KLV405BL	KLV405BL	785988040582	Die-cast Aluminum, Ground Mount, Black	●				1.31	
KLV410	KLV410	785988040599	Black	●				0.44	
KLV600	KLV600	785988040605	Stainless Steel, Wall, 120V, 200W, Silver, Wet Location	●				0.44	
KLV620	KLV620	785988040629	Stainless Steel, Wall, 120V, 600W, Silver, Wet Location	●				0.44	
KLV625	KLV625	785988040636	Stainless Steel, Wall, 120V, 900W, Silver, Wet Location	●				0.44	
KLV640	KLV640	785988040643	Stainless Steel, Below Grade, Black, Wet Location	●				0.34	
KLV645	KLV645	785988040650	Stainless Steel, Below Grade, Black, Wet Location	●				0.34	
EP17	EP17	785988040322	12V, 120V, Black	●				0.15	
KLV400DB	KLV400DB	–	Groun Mount, Die-cast Aluminum, Ground Mount, Dark Bronze	●				0.77	
KLV400GR	KLV400GR	–	Groun Mount, Die-cast Aluminum, Ground Mount, 347V	●				0.77	

PROV/PROL - Providence® Medium/Large Housing Scale

Providence® complements period themed environments in a comprehensive family of solutions with reliable, uniform, glare free illumination. The Providence® family also includes a matching bollard, small, and large-scale luminaires.

20-Day Quick-Ship Ordering Guide
Order Limit Per Luminaire Selection: 25

[ ] - [ ] - [ ] - WIRED 120-277 - STANDARD MOUNT - [ ]

MODEL
- **PROV** Providence Medium
- **PROL** Providence Large

LUMEN PACKAGE

PROV
- 32LED-4K-450 4000K, 48W
- 32LED-4K-700 4000K, 75W

PROL
- 56LED-4K-450 4000K, 85W
- 56LED-4K-700 4000K, 132W

VOLTAGE
WIRED 120-277V

MOUNTING

FINISH

STANDARD COLOR
- **BL** Black
- **BLT** Matte Black
- **DB** Dark Bronze
- **MAL** Matte Aluminum

DISTRIBUTION
- **T3** IES Type III
- **T5** IES Type V

UCM/UCL - Universe® Medium/Large Housing Scale

Universe® Collection enables limitless customization of a timeless family. Universe includes 5 luminous elements, 15 hood styles and over 60 mountings enable specifiers to create the exact configuration for any application. The Universe® Collection also includes a matching bollard, small and large-scale luminaires.

20-Day Quick-Ship Ordering Guide
Order Limit Per Luminaire Selection: 25

[ ] - [ ] - [ ] - WIRED 120-277 - [ ] - [ ]

MODEL
- **UCM-ANG-SR** Universe Medium Solid Ring Angle Hood
- **UCM-STR-SR** Universe Medium Solid Ring Straight Hood
- **UCL-ANG-SR** Universe Large Solid Ring Angle Hood

LUMEN PACKAGE

UCM
- 32LED-4K-450 4000K, 48W
- 32LED-4K-700 4000K, 71W

UCL
- 56LED-4K-450 4000K, 84W
- 56LED-4K-700 4000K, 132W

VOLTAGE
WIRED 120-277V

MOUNTING
- SLA7
- SLA17

FINISH

STANDARD COLOR
- **BL** Black
- **BLT** Matte Black
- **DB** Dark Bronze
- **MAL** Matte Aluminum

DISTRIBUTION
- **T3** IES Type III
- **T5** IES Type V

K4 - KicK™ Small Housing Scale

The award winning KicK™ and it's patent pending optical system bring the lighting industry's first angled housing capable of IES distributions with no up-light for fully shielded glare free illumination. KicK is configurable as a pole mount, integral pole mount with 1–4 fixtures as well as a unique staggered twin mount.

20-Day Quick-Ship Ordering Guide
Order Limit Per Luminaire Selection: 25

K4 - [ ] - [ ] - [ ] - [ ] - [ ] - WIRED 120-277 - [ ]

MODEL
- **K41** KicK Medium

OPTICAL FINISH
- **MO** Optics in Matte Black finish
- **FO** Optics in Fixture finish

MOUNTING
- **PS414-125** 14' luminaire height
- **PS416-125** 16' luminaire height

COLOR

STANDARD COLOR
- **BL** Black
- **BLT** Matte Black
- **DB** Dark Bronze
- **MAL** Matte Aluminum

DISTRIBUTION
- **T2** IES Type II
- **T3** IES Type III

LUMEN PACKAGE
- **7040** 4000K, CRI 70, 64 watts
- **5040** 4000K, CRI 70, 46 watts

VOLTAGE
WIRED 120-277V

Kick at Ridgedale Mall

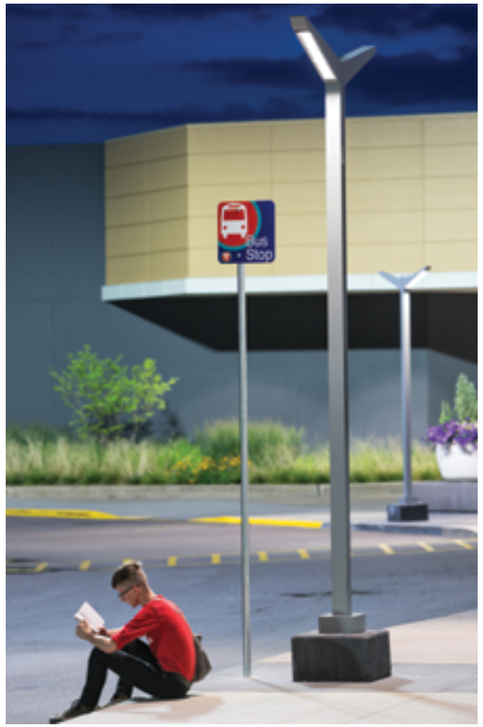

Large Viper LED Luminaire

The Large Viper luminaire is available with a wide choice of different LED wattage configurations and optical distributions designed to replace HID lighting up to 1000W MH or HPS. 4 different mounting options allow for application in a wide variety of new and existing installations.

10-Day Quick-Ship Ordering Guide

Order Limit Per Luminaire Selection: 15 (Contact factory for larger quanities)

VPL				UNV			
SERIES	**ENGINE**	**CCT**	**OPTICS**	**VOLTAGE**	**MOUNTING**	**FINISH**	**OPTIONS**
VPL Viper Large	**80L-180** 180W LED array	**4K7** 4000K	**3** Type III	**UNV** Universal 120-277V	**A** Rectangular Arm	**BBT** Black Textured	**7PR** 7 pin twist lock receptacle
	80L-235 235W LED array	**5K7** 5000K	**4** Type IV		**MAF** 2 3/8" OD slip-fitter	**DBT** Dark Bronze Textured	**SCP** Motion dimming dectector
	96L-280 280W LED array		**5W** Type V, round wide		**K** Knuckle (formerly PK2) limit to 30° tilt or 2-3/8" OD horizontal arm or vertical tenon	**DPS** Dark Platinum Smooth	
	96L-395 395W LED array						

Viper Small

The Small Viper luminaire is available with a wide choice of different LED wattage configurations and optical distributions designed to replace HID lighting up to 400W MH or HPS. 4 different mounting options allow for application in a wide variety of new and existing installations.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	# on Pallet
93090937	VP-S/24L-55/5K7/3/UNV/A/DBT	78598841015	LED, Small, Die-Cast Aluminum, 70 CRI, 5000K, 6000 LMS, Arm Mount, Type III Distribution, 0-10V Dimming Driver, 120-277V, 55W, 24 LEDs, 114 LPW, Dark Bronze Textured, CSA	●	●	●	●	2.655	
93090938	VP-S/36L-80/5K7/3/UNV/A/DBT	78598841022	LED, Small, Die-Cast Aluminum, 70 CRI, 5000K, 7400 LMS, Arm Mount, Type III Distribution, 0-10V Dimming Driver, 120-277V, 80W, 36 LEDs, 117 LPW, Dark Bronze Textured, CSA	●	●	●	●	5.15	
93090939	VP-S/60L-136/5K7/3/UNV/A/DBT	78598841039	LED, Small, Die-Cast Aluminum, 70 CRI, 5000K, 15,300 LMS, Arm Mount, Type III Distribution, 0-10V Dimming Driver, 120-277V, 136W, 60 LEDs, 114 LPW, Dark Bronze Textured, CSA	●	●	●	●	4.31	

10-Day Quick-Ship Ordering Guide

Order Limit Per Luminaire Selection: 15 (Contact factory for larger quanities)

VPS				U			
SERIES	**ENGINE**	**CCT**	**OPTICS**	**VOLTAGE**	**MOUNTING**	**FINISH**	**OPTIONS**
VPS Viper Small	**36L-65** 65W LED array	**4K7** 4000K	**3** Type III	**U** Universal 120-277V	**A** Rectangular Arm	**BBT** Black Textured	**7PR** 7 pin twist lock receptacle
	36L-80 80W LED array	**5K7** 5000K	**4** Type IV		**MAF** 2 3/8" OD slip-fitter	**DBT** Dark Bronze Textured	**SCP** Motion dimming dectector
	48L-110 110W LED array		**5W** Type V, round wide		**K** Knuckle (formerly PK2) limit to 30° tilt or 2-3/8" OD horizontal arm or vertical tenon	**DPS** Dark Platinum Smooth	
	60L-136 136W LED array						

PG Series

Wet location listed emergency lighting unit for indoor/outdoor installation featuring long-life, high-output LEDs. Nickel Cadmium Battery, UL 924, UL Wet Location, NFPA 101, NFPA 70, OSHA.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
PGB	PGB	782520862459	LED Emergency Light, 4 Lamp Head, Wall Mount, 120V, 277V, 2.8W, Black Housing	●				6.2	6
PGB-HTR	PGB-HTR	782520862466	LED Emergency Light, With Heater, 4 Lamp Head, Wall Mount, 120V, 2.8W, Black Housing			●	●	6.5	6
PGP	PGP	782520862084	LED Emergency Light, 4 Lamp Head, Wall Mount, 120V, 277V, 2.8W, Platinum Silver Housing	●	●			6.2	6
PGP-HTR	PGP-HTR	782520862114	LED Emergency Light, With Heater, 4 Lamp Head, Wall Mount, 120V, 277V, 2.8W, Platinum Silver Housing			●		6.5	6
PGW	PGW	782520862060	LED Emergency Light, 4 Lamp Head, Wall Mount, 120V, 277V, 2.8W, White Housing	●	●			6.2	6
PGW-HTR	PGW-HTR	782520862091	LED Emergency Light, With Heater, 4 Lamp Head, Wall Mount, 120V, 277V, 2.8W, White Housing	●		●		6.5	6
PGZ	PGZ	782520862077	LED Emergency Light, 4 Lamp Head, Wall Mount, 120V, 277V, 2.8W, Dark Bronze Housing	●	●			6.2	6
PGZ-HTR	PGZ-HTR	782520862107	LED Emergency Light, With Heater, 4 Lamp Head, Wall Mount, 120V, 277V, 2.8W, Dark Bronze Housing	●	●	●	●	6.5	6

EVHC Series

The EVHC series is a high lumen output emergency lighting unit designed for high mounting height applications. Lithium Iron Phosphate Battery, UL 924, NFPA 101, NFPA 70, UL Damp location.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93050457	EVHC12	782520866877	LED Emergency Light, 2 Lamp Heads, Wall Mount, 120V, 277V, 12W, White Housing		●			0.28	6
93050459	EVHC12-06L	782520866891	LED Emergency Light, 2 Lamp Heads, Wall Mount, 120V, 277V, 12W, White Housing	●	●			0.28	6
93050458	EVHC12I	782520866884	LED Emergency Light, 2 Lamp Heads, Wall Mount, 120V, 277V, 12W, White Housing	●	●			0.27	6
93050460	EVHC12I-06L	782520866907	LED Emergency Light, 2 Lamp Heads, Wall Mount, 120V, 277V, 12W, White Housing	●	●			0.28	6
93085542	EVHC12ID-06L	782520869625	LED Emergency Light, 2 Lamp Heads, Wall Mount, 120V, 277V, 12W, White Housing	●	●			0.18	6
93050453	EVHC6	782520866839	LED Emergency Light, 2 Lamp Heads, Wall Mount, 120V, 277V, 6W, White Housing	●	●	●		0.18	6
93050456	EVHC6-B	782520866860	LED Emergency Light, 2 Lamp Heads, Wall Mount, 120V, 277V, 6W, Black Housing	●	●			0.2	6
93050454	EVHC6I	782520866846	LED Emergency Light, 2 Lamp Heads, Wall Mount, 120V, 277V, 6W, White Housing	●	●	●		0.18	6
93085541	EVHC6ID	782520869632	LED Emergency Light, 2 Lamp Heads, Wall Mount, 120V, 277V, 6W, White Housing	●	●			0.18	6

EV Series

The EV Series is a compact architectural emergency lighting unit designed for fast wall mount installation and reliable service. The EV unit is available with or without remote capacity. The EV series includes the EVR – 2 head LED indoor remote, and the EVO – single or double-head outdoor remote as an accessory.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93036776	EV2	782520865405	LED Emergency Remote, 2 Lamp Heads, 88 LMS Per LED, Wall, Ceiling Mount, 120V, 277V, White Housing, Nickel Metal Hydride Battery, UL 924, RoHS, CEC T21	●	●	●	●	0.15	12
93036777	EV2D	782520865412	LED Emergency Remote, 2 Lamp Heads, 88 LMS Per LED, Wall, Ceiling Mount, 120V, 277V, White Housing, Nickel Metal Hydride Battery, UL 924, Damp Location, RoHS, CEC T22	●	●			0.46	12
93036780	EV2DB	782520865443	LED Emergency Remote, 2 Lamp Heads, 88 LMS Per LED, Wall, Ceiling Mount, 120V, 277V, Black Housing, Nickel Metal Hydride Battery, UL 924, Damp Location, RoHS, CEC T23	●	●	●		0.46	12
93036778	EV2DI	782520865429	LED Emergency Remote, 2 Lamp Heads, 88 LMS Per LED, Wall, Ceiling Mount, 120V, 277V, White Housing, Nickel Metal Hydride Battery, UL 924, Damp Location, RoHS, CEC T24	●	●	●		0.51	12
93036779	EV2DI-24K	782520865436	LED Emergency Remote, 2 Lamp Heads, 88 LMS Per LED, Wall, Ceiling Mount, 120-277V, 220-240V, White Housing, Nickel Metal Hydride Battery, UL 924, Damp Location, RoHS, CEC T25		●			0.44	12
93036783	EV4D	782520865474	LED Emergency Light, 2 Lamp Heads, 248 LMS Per head, Ceiling, Wall Mount, 120V, 277V, 4W, White Housing, Nickel Metal Hydride Battery, UL 924, NFPA 101, NFPA 70, CEC T20, Damp Location, RoHS	●	●	●		0.15	12
93048744	EV4D-02L	782520866785	LED Emergency Light, 2 Lamp Heads, 248 LMS Per head, Ceiling, Wall Mount, 120V, 277V, 4W, White Housing, Nickel Metal Hydride Battery, UL 924, NFPA 101, NFPA 70, CEC T20, Damp Location, RoHS	●	●			0.15	12
93036786	EV4DB	782520865504	LED Emergency Light, 2 Lamp Heads, 248 LMS Per head, Ceiling, Wall Mount, 120V, 277V, 4W, Black Housing, Nickel Metal Hydride Battery, UL 924, NFPA 101, NFPA 70, CEC T20, Damp Location, RoHS	●	●			0.15	12
93048745	EV4DI-02L	782520866792	LED Emergency Light, 2 Lamp Heads, 248 LMS Per head, Ceiling, Wall Mount, 120V, 277V, 4W, White Housing, Nickel Metal Hydride Battery, UL 924, NFPA 101, NFPA 70, CEC T20, Damp Location, RoHS	●	●			0.15	12

EV4D-02WAL Series

The EV4D-02WAL is a compact architectural emergency light with an optimized lighting pattern which offers 50' spacing at a 7.5' mounting height. Nickel Metal Hydride Battery, UL 924, NFPA 101, NFPA 70, CEC T20, Damp Location, RoHS.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93052403	EV4D-02L-0	782520867058	LED Emergency Light, 2 Lamp Heads, 248 LMS Per head, Wall Mount, 120V, 277V, 4W, White Housing	●	●			0.45	12
93097187	EV4D-02WAL	782520870836	LED Emergency Light, 2 Lamp Heads, 248 LMS Per head, Wall Mount, 120V, 277V, 4W, White Housing	●	●			0.15	12
93048747	EV4DB-02L	782520866808	LED Emergency Light, 2 Lamp Heads, 248 LMS Per head, Wall Mount, 120V, 277V, 4W, Black Housing			●		0.15	12
93097188	EV4DB-02WAL	782520870843	LED Emergency Light, 2 Lamp Heads, 248 LMS Per head, Wall Mount, 120V, 277V, 4W, White Housing	●	●			0.5	12
93036784	EV4DI	782520865481	LED Emergency Light, 2 Lamp Heads, 248 LMS Per head, Wall Mount, 120V, 277V, 4W, White Housing	●	●			0.5	12
93052404	EV4DI-02L-0	782520867065	LED Emergency Light, 2 Lamp Heads, 248 LMS Per head, Wall Mount, 120V, 277V, 4W, White Housing	●	●			0.43	12
93097189	EV4DI-02WAL	782520870850	LED Emergency Light, 2 Lamp Heads, 260 LMS Per head, Wall Mount, 120V, 277V, 4W, White Housing	●	●			0.45	12
93097190	EV4DIB-02WAL	782520870867	LED Emergency Light, 2 Lamp Heads, 248 LMS Per head, Wall Mount, 120V, 277V, 4W, White Housing	●	●			0.5	12

EV4R Series

The EV4R Series is a ceiling mounted, recessed emergency light with superior emergency lighting coverage. Nickel Metal Hydride Battery, UL 924, NFPA 101, NFPA 70, Damp Location, IC Rated, CEC T20.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93063484	EV4R	782520868772	LED Emergency Light, 4 Lamp Head, 88 LMS Per LED, Ceiling, Recessed Mount, 120V, 277V, 4W, White Housing	●	●	●		0.5	6
93066307	EV4RI	782520868789	LED Emergency Light, 4 Lamp Head, 88 LMS Per LED, Ceiling, Recessed Mount, 120V, 277V, 4W, White Housing	●	●	●		0.51	6
93066306	EV4RB	782520868796	LED Emergency Light, 4 Lamp Head, 88 LMS Per LED, Ceiling, Recessed Mount, 120V, 277V, 4W, Black Housing	●	●			0.5	6
93066308	EV4RIB	782520868802	LED Emergency Light, 4 Lamp Head, 88 LMS Per LED, Ceiling, Recessed Mount, 120V, 277V, 4W, Black Housing	●	●			0.15	6
93084665	KIT-EV4R-CP	782520869649	Chicago Plenum Mounting Kit, 120V, 277V, White, Black Housing, Nickel Metal Hydride Battery			●		1	1

EZ-2 Series

The Dual-Lite EZ-2 is a unique and efficient self-contained emergency lighting unit designed to meet a variety of needs. Lead Calcium Battery Battery, UL 924, UL 924 Damp.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
EZ-2	EZ-2	782520430023	LED Emergency Light, 2 Lamp Heads, Wall, Ceiling Mount, 120V, 277V, 5.4W each, White Housing	●	●	●	●	0.18	6
EZ-2-D	EZ-2-D	782520840365	LED Emergency Light, 2 Lamp Heads, Wall, Ceiling Mount, 120V, 277V, 5.4W each, White Housing	●	●	●		0.18	6
EZ-2I	EZ-2I	782520837501	LED Emergency Light, 2 Lamp Heads, Wall, Ceiling Mount, 120V, 277V, 7.2W each, White Housing	●	●	●	●	0.18	6
EZ-2-V	EZ-2-V	782520837495	LED Emergency Light, 2 Lamp Heads, Wall, Ceiling Mount, 120V, 277V, 5.4W each, White Housing	●			●	0.19	6

LZ Series

Low-profile, easy to install emergency lighting unit featuring high-output halogen lamps. Available in standard, remote capacity and damp location versions. Lead Calcium Battery Battery, UL 924, NFPA 101, NFPA 70, ADA.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
LZ15	LZ15	782520852450	Emergency Light, 2 Lamp Heads, Wall Mount, 120V, 277V, 5W each head, White Housing	●		●	●	6	6
LZ2	LZ2	782520836740	Emergency Light, 2 Lamp Heads, Wall Mount, 120V, 277V, 5W each head, White Housing	●	●	●	●	5.2	6
LZ2-B	LZ2-B	782520859992	Emergency Light, 2 Lamp Heads, Wall Mount, 120V, 277V, 5W each head, Black Housing	●	●	●		6	6
LZ2D	LZ2D	782520836788	Emergency Light, 2 Lamp Heads, Wall Mount, 120V, 277V, 5W each head, White Housing	●	●			5.2	6
LZ2DI	LZ2DI	782520849436	Emergency Light, 2 Lamp Heads, Wall Mount, 120V, 277V, 5W each head, White Housing	●	●	●		5.2	6
LZ2-V	LZ2-V	782520837280	Emergency Light, 2 Lamp Heads, Wall Mount, 120V, 277V, 5W each head, White Housing		●			5.2	6
LZ30	LZ30	782520837907	Emergency Light, 2 Lamp Heads, Wall Mount, 120V, 277V, 5W each head, White Housing	●	●	●		5.2	4
LZ30-10W	LZ30-10W	782520851361	Emergency Light, 2 Lamp Heads, Wall Mount, 120V, 277V, 5W each head, White Housing	●	●	●		6	4
LZ30I	LZ30I	782520840419	Emergency Light, 2 Lamp Heads, Wall Mount, 120V, 277V, 5W each head, White Housing	●	●			5.08	4

LM Series

Commercial/Industrial High-Capacity Emergency Lighting Units. Corrosion-resistant, rugged metal units featuring fully adjustable lighting heads and easy installation. Most models have additional battery capacity for powering remote fixtures or extended run times. Available in standard and damp location models. Lead Calcium Battery Battery, UL 924, UL 924 Damp.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
LM40	LM40	782520843755	LED Emergency Light, 2 Lamp Heads, 155 LMS Per LED, Wall Mount, 120V, 277V, 40W, White Housing	●	●			5.2	1
LM40-12V	LM40-12V	782520843816	LED Emergency Light, 2 Lamp Heads, 155 LMS Per LED, Wall Mount, 120V, 277V, 40W, White Housing	●	●			16	1
LM66	LM66	782520843779	LED Emergency Light, 2 Lamp Heads, 155 LMS Per LED, Wall Mount, 120V, 277V, 66W, White Housing	●			●	7.1	1
LM66-12V	LM66-12V	782520843830	LED Emergency Light, 2 Lamp Heads, 155 LMS Per LED, Wall Mount, 120V, 277V, 66W, White Housing	●		●	●	8.7	1
LM66I	LM66I	782520851866	LED Emergency Light, 2 Lamp Heads, 155 LMS Per LED, Wall Mount, 120V, 277V, 66W, White Housing		●			9.7	1
LM80	LM80	782520843786	LED Emergency Light, 2 Lamp Heads, 155 LMS Per LED, Wall Mount, 120V, 277V, 80W, White Housing		●			8.1	1
LM80-12V	LM80-12V	782520843847	LED Emergency Light, 2 Lamp Heads, 155 LMS Per LED, Wall Mount, 120V, 277V, 80W, White Housing,	●				7	1
LM130	LM130	782520843809	LED Emergency Light, 2 Lamp Heads, 155 LMS Per LED, Wall Mount, 120V, 277V, 130W, White Housing	●				3	1
LM130-12V	LM130-12V	782520843861	LED Emergency Light, 2 Lamp Heads, 155 LMS Per LED, Wall Mount, 120V, 277V, 130W, White Housing	●				3	1
LM16	LM16	782520843731	LED Emergency Light, 2 Lamp Heads, 155 LMS Per LED, Wall Mount, 120V, 277V, 16W, White Housing	●		●	●	8	1
LM16I	LM16I	782520851651	LED Emergency Light, 2 Lamp Heads, 155 LMS Per LED, Wall Mount, 120V, 277V, 16W, White Housing	●				3	1
LM2	LM2	782520843724	LED Emergency Light, 2 Lamp Heads, 155 LMS Per LED, Wall Mount, 120V, 277V, 10.8W, White Housing	●		●		3	1
93073247	LM2-03L	782520868918	LED Emergency Light, 2 Lamp Heads, 155 LMS Per LED, Wall Mount, 120V, 277V, 10.8W, White Housing	●	●			0.94	1
LM33	LM33	782520843748	LED Emergency Light, 2 Lamp Heads, 155 LMS Per LED, Wall Mount, 120V, 277V, 33W, White Housing	●	●	●	●	0.7	1
93073249	LM33-03L	782520868949	LED Emergency Light, 2 Lamp Heads, 155 LMS Per LED, Wall Mount, 120V, 277V, 33W, White Housing	●	●			0.7	1
LM33I	LM33I	782520851705	LED Emergency Light, 2 Lamp Heads, 155 LMS Per LED, Wall Mount, 120V, 277V, 33W, White Housing	●				4.5	1
93073250	LM33I-03L	782520868956	LED Emergency Light, 2 Lamp Heads, 155 LMS Per LED, Wall Mount, 120V, 277V, 33W, White Housing	●	●			5.5	1

Dynamo DYN Series

The "Dynamo" DYN Series is a highly versatile superior lumen output, industrial application emergency lighting unit, designed to provide a minimum of 90 minutes illumination when primary power is lost.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93048723	DYN12	782520867478	Industrial LED Exit and Emergency, 2 Lamp Heads, Wall Mount, 120V, 277V, 12W, Gray Housing, Lithium Iron Phosphate Battery, UL 924, NEMA 4, 4X, UL Sanitation, UL 844, IP66, NEC Class 1 Division 2 Groups A, B, C, D, NEC Class 2 Division 1 Groups E, F and G, NEC Class 3, CEC T21	●	●			0.38	4
93048724	DYN12-06L	782520867539	Industrial LED Exit and Emergency, 2 Lamp Heads, Wall Mount, 120V, 277V, 12W, Gray Housing, Lithium Iron Phosphate Battery, UL 924, NEMA 4, 4X, UL Sanitation, UL 844, NEC Class 1 Division 2 Groups A, B, C, D, NEC Class 2 Division 1 Groups E, F and G, NEC Class 3, CEC T22	●	●			0.41	4
93048726	DYN12-4X-06L	782520867553	Industrial LED Exit and Emergency, 2 Lamp Heads, Wall Mount, 120V, 277V, 12W, Gray Housing, Lithium Iron Phosphate Battery, UL 924, NEMA 4, 4X, UL Sanitation, UL 844, IP66, NEC Class 1 Division 2 Groups A, B, C, D, NEC Class 2 Division 1 Groups E, F and G, NEC Class 3, CEC T21	●	●			0.41	4
93048728	DYN12I-06L	782520867546	Industrial LED Exit and Emergency, 2 Lamp Heads, Wall Mount, 120V, 277V, 12W, Gray Housing, Lithium Iron Phosphate Battery, UL 924, NEMA 4, 4X, UL Sanitation, UL 844, NEC Class 1 Division 2 Groups A, B, C, D, NEC Class 2 Division 1 Groups E, F and G, NEC Class 3, CEC T20	●	●			0.42	4
93048729	DYN12I-4X-HTR-06L	782520867560	Industrial LED Exit and Emergency, 2 Lamp Heads, Wall Mount, 120V, 277V, 6W, Gray Housing, Lithium Iron Phosphate Battery, UL 924, NEMA 4, 4X, UL Sanitation, UL 844, IP66, NEC Class 1 Division 2 Groups A, B, C, D, NEC Class 2 Division 1 Groups E, F and G, NEC Class 3, CEC T21	●	●			0.44	4
93048720	DYN6	782520867416	Industrial LED Exit and Emergency, 2 Lamp Heads, Wall Mount, 120V, 277V, 6W, Gray Housing, Lithium Iron Phosphate Battery, UL 924, NEMA 4, 4X, UL Sanitation, UL 844, NEC Class 1 Division 2 Groups A, B, C, D, NEC Class 2 Division 1 Groups E, F and G, NEC Class 3, CEC T23	●				0.46	4
93048722	DYN6I	782520867423	Industrial LED Exit and Emergency, 2 Lamp Heads, Wall Mount, 120V, 277V, 6W, Gray Housing, Lithium Iron Phosphate Battery, UL 924, NEMA 4, 4X, UL Sanitation, UL 844, NEC Class 1 Division 2 Groups A, B, C, D, NEC Class 2 Division 1 Groups E, F and G, NEC Class 3, CEC T23	●	●			0.407	4
93048721	DYN6I-4X	782520867447	Industrial LED Exit and Emergency, 2 Lamp Heads, Wall Mount, 120V, 277V, 6W, Gray Housing, Lithium Iron Phosphate Battery, UL 924, NEMA 4, 4X, UL Sanitation, UL 844, IP66, NEC Class 1 Division 2 Groups A, B, C, D, NEC Class 2 Division 1 Groups E, F and G, NEC Class 3, CEC T21	●	●			0.42	4
93093078	DYNCDRW12	782520870058	Industrial LED Exit and Emergency, Red, Dual Face, 2 Lamp Heads, Wall, Ceiling, End Mount, 120V, 277V, 12W, White Housing, Remote Capability, Lithium Iron Phosphate(LiFePO) battery Battery	●	●			0.39	4
93093076	DYNCDRW6	782520870010	Industrial LED Exit and Emergency, Red, Dual Face, 2 Lamp Heads, Wall, Ceiling, End Mount, 120V, 277V, 6W, White Housing, Lithium Iron Phosphate(LiFePO) Battery	●	●			0.67	4
93093077	DYNCSRW12	782520870034	Industrial LED Exit and Emergency, Red, Single Face, 2 Lamp Heads, Wall, Ceiling, End Mount, 120V, 277V, 12W, White Housing, Remote Capability, Lithium Iron Phosphate(LiFePO) Battery	●				0.62	4
93093075	DYNCSRW6	782520869991	Industrial LED Exit and Emergency, Red, Single Face, 2 Lamp Heads, Wall, Ceiling, End Mount, 120V, 277V, 6W, White Housing, Lithium Iron Phosphate(LiFePO) Battery	●	●			0.63	4
93048725	DYN12-4X	782520867485	Industrial LED Exit and Emergency, 2 Lamp Heads, Wall Mount, 120V, 277V, 12W, Gray Housing, Lithium Iron Phosphate Battery, UL 924, NEMA 4, 4X, UL Sanitation, UL 844, NEC Class 1 Division 2 Groups A, B, C, D, NEC Class 2 Division 1 Groups E, F and G, NEC Class 3, CEC T23	●	●			0.38	4
93048727	DYN12I	782520867492	Industrial LED Exit and Emergency, 2 Lamp Heads, Wall Mount, 120V, 277V, 12W, Gray Housing, Lithium Iron Phosphate Battery, UL 924, NEMA 4, 4X, UL Sanitation, UL 844, NEC Class 1 Division 2 Groups A, B, C, D, NEC Class 2 Division 1 Groups E, F and G, NEC Class 3, CEC T23	●	●			0.44	4

Dynamo DYN Series (continued)

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93063629	DYN12I-4X-06L	782520867553	Industrial LED Exit and Emergency, 2 Lamp Heads, Wall Mount, 120V, 277V, 6W, Gray Housing, Lithium Iron Phosphate Battery, UL 924, NEMA 4, 4X, UL Sanitation, UL 844, IP66, NEC Class 1 Division 2 Groups A, B, C, D, NEC Class 2 Division 1 Groups E, F and G, NEC Class 3, CEC T21	●				0.4	4
93093086	DYNCDGW12-06L	782520870188	Industrial LED Exit and Emergency, Green, Dual Face, 2 Lamp Heads, Wall, Ceiling, End Mount, 120V, 277V, 12W, White Housing, Remote Capability, Lithium Iron Phosphate(LiFePO) Battery	●				0.45	4
93093090	DYNCDRB12	782520870256	Industrial LED Exit and Emergency, Red, Dual Face, 2 Lamp Heads, Wall, Ceiling, End Mount, 120V, 277V, 12W, Black Housing, Remote Capability, Lithium Iron Phosphate(LiFePO) Battery	●	●			0.39	4
93093080	DYNCDRW12-06L	782520870089	Industrial LED Exit and Emergency, Red, Dual Face, 2 Lamp Heads, Wall, Ceiling, End Mount, 120V, 277V, 12W, White Housing, Remote Capability, Lithium Iron Phosphate(LiFePO) Battery	●	●			0.64	4
93093085	DYNCSGW12-06L	782520870171	Industrial LED Exit and Emergency, Green, Single Face, 2 Lamp Heads, Wall, Ceiling, End Mount, 120V, 277V, 12W, White Housing, Remote Capability, Lithium Iron Phosphate(LiFePO) Battery	●				0.65	4
93093089	DYNCSRB12	782520870232	Industrial LED Exit and Emergency, Red, Single Face, 2 Lamp Heads, Wall, Ceiling, End Mount, 120V, 277V, 12W, Black Housing, Remote Capability, Lithium Iron Phosphate(LiFePO) Battery	●	●			0.745	4
93093079	DYNCSRW12-06L	782520870072	Industrial LED Exit and Emergency, Red, Single Face, 2 Lamp Heads, Wall, Ceiling, End Mount, 120V, 277V, 12W, White Housing, Remote Capability, Lithium Iron Phosphate(LiFePO) Battery	●	●			0.623	4

EVS Series

AC Mode 1200 Lumens, Emergency Mode 350 Lumens, 4000K CCT, Emergency models include Self-Test/Self-Diagnostics, Heater Option

Part Number	Catalog Number	UPC Code	Description	CA 03	GA 27	IL 06	PA 10	Wt. each	Ctn. Qty
93123060	EVSBN	782520871949	Brushed Nickel Housing, AC only	●	●			4.5 lbs	4
93123061	EVSDB	782520871956	Dark Bronze Housing, AC only	●	●			4.5 lbs	4
93123062	EVSW	782520871963	White Housing, AC only	●	●			4.5 lbs	4
93123063	EVSBNE	782520871970	Brushed Nickel Housing, Emergency with Battery	●	●			5 lbs	4
93123064	EVSDBE	782520871987	Dark Bronze Housing, Emergency with Battery	●	●			5 lbs	4
93123065	EVSWE	782520871994	White Housing, Emergency with Battery	●	●			5 lbs	4
93123066	EVSBNE-HTR	782520872007	Brushed Nickel Housing, Emergency with Battery, Heater	●	●			5 lbs	4
93123067	EVSDBE-HTR	782520872014	Dark Bronze Housing, Emergency with Battery, Heater	●	●			5 lbs	4
93123068	EVSWE-HTR	782520872021	White Housing, Emergency with Battery, Heater	●	●			5 lbs	4

LiteGear® Series

Featuring a 125 - 250VA rating, this compact, economical interruptible power supply provides emergency AC power for lighting fixtures equipped with incandescent, fluorescent or LED lamps.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93062933	LG125S	782520867829	125VA/110W, Surface Wall Mount, True Sine Wave Output	●	●	●	●	42.00 lbs	1
93062932	LG125R	782520867850	125VA/110W, Recessed Wall Mount, True Sine Wave Output	●		●		42.00 lbs	1
93062931	LG125T	782520867836	125VA/110W, Recessed Ceiling T-Grid Mount, True Sine Wave Output	●		●		43.00 lbs	1
93066601	LG250S	782520868161	250VA/220W Surface Wall Mount, True Sine Wave Output	●		●	●	60.00 lbs	1
93081949	LG250SI	782520869564	250VA/220W Surface Wall Mount with Self Testing, True Sine Wave Output	●	●	●		60.00 lbs	1
93094165	LG125S-AO	782520869878	125VA/110W, Surface Wall Mount with Adjustable Output, True Sine Wave	●	●	●		43.00 lbs	1
93094166	LG125R-AO	782520869885	125VA/110W, Recessed Wall Mount with Adjustable Output, True Sine Wave	●	●	●		43.00 lbs	1
93094167	LG125T-AO	782520869892	125VA/110W, Recessed Ceiling T-Grid Mount with Adjustable Output, True Sine Wave	●	●	●		44.00 lbs	1
93094168	LG250S-AO	782520869915	250VA/220W Surface Wall Mount with Adjustable Output, True Sine Wave	●	●	●		61.00 lbs	1
93094169	LG250SI-AO	782520869977	250VA/220W Surface Wall Mount with Self Testing and Adjustable Output, True Sine Wave	●	●	●		61.00 lbs	1
93094169	LG250SI-AO	782520869977	250VA/220W Surface Wall Mount with Self Testing and Adjustable Output, True Sine Wave	●	●	●		61.00 lbs	1
93094169	LG250SI-AO	782520869977	250VA/220W Surface Wall Mount with Self Testing and Adjustable Output, True Sine Wave	●	●	●		61.00 lbs	1
93123516	LG375S	00840141419534	375VA/W, Surface Wall Mount, True Sine Wave Output	●	●			113.00 lbs	1
93123517	LG375SI	00840141419541	375VA/W, Surface Wall Mount with Self Testing, True Sine Wave Output	●	●			113.00 lbs	1
93123518	LG600S	00840141419558	600VA/W, Surface Wall Mount, True Sine Wave Output	●	●			172.00 lbs	1
93123519	LG600SI	00840141419565	600VA/W, Surface Wall Mount with Self Testing, True Sine Wave Output	●	●			172.00 lbs	1

LightPower™ LPS Series

20W through 55W central lighting micro Inverter systems that provide sinusoidal emergency AC power to LED, fluorescent and incandescent lighting fixtures.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93062365	LPS20-R	782520867690	Inverter, Recessed Wall Mount, 120V, 277V, 20W, White Housing, Nickel-Cadmium Battery, UL 924, NFPA 101, NFPA 70			●		12	1
93062364	LPS20-S	782520867683	Inverter, Surface Mount Mount, 120V, 277V, 20W, White Housing, Nickel-Cadmium Battery, UL 924, UL 2043, CCEA, NFPA 101, NFPA 70			●		11	1
93062366	LPS20-T	782520867706	Inverter, Recessed Ceiling T-Grid Mount, 120V, 277V, 20W, White Housing, Nickel-Cadmium Battery, UL 924, NFPA 101, NFPA 70			●		12	1
93062359	LPS32-R	782520867720	Inverter, Recessed Wall Mount, 120V, 277V, 32W, White Housing, SLA Lead Calcium, UL 924, NFPA 101, NFPA 70			●		15	1
93062358	LPS32-S	782520867713	Inverter, Surface Wall Mount, 120V, 277V, 32W, White Housing, SLA Lead Calcium, UL 924, NFPA 101, NFPA 70			●		14	1
93062360	LPS32-T	782520867737	Inverter, Recessed Ceiling T-Grid Mount, 120V, 277V, 35W, White Housing, SLA Lead Calcium, Nickel-Cadmium Battery, UL 924, NFPA 101, NFPA 70			●		15	1
93062368	LPS35-R	782520867751	Inverter, Recessed Wall Mount, 120V, 277V, 35W, White Housing, Nickel-Cadmium Battery, UL 924, NFPA 101, NFPA 70			●		13	1
93062367	LPS35-S	782520867744	Inverter,Surface Wall Mount, 120V, 277V, 32W, White Housing, Nickel-Cadmium Battery, UL 924, NFPA 101, NFPA 70			●		12	1
93062369	LPS35-T	782520867768	Inverter, Recessed Ceiling T-Grid Mount, 120V, 277V, 35W, White Housing, SLA Lead Calcium, Nickel-Cadmium Battery, UL 924, NFPA 101, NFPA 70			●		13	1
93062362	LPS55-R	782520867782	Inverter, Recessed Wall Mount, 120V, 277V, 55W, White Housing, SLA Lead Calcium Battery, UL 924, NFPA 101, NFPA 70			●		19	1
93062361	LPS55-S	782520867775	Inverter, Surface Wall Mount, 120V, 277V, 55W, White Housing, SLA Lead Calcium Battery, UL 924, NFPA 101, NFPA 70			●		18	1
93062363	LPS55-T	782520867799	Inverter, Recessed Ceiling T-Grid Mount, 120V, 277V, 55W, White Housing, SLA Lead Calcium Battery, UL 924, NFPA 101, NFPA 70			●		19	1
93062452	RTSLP	782520867812	Remote Switch, 120V, 277V, White Wall Plate			●	●	0.20	1

Synchron DLS Series

400W and 525W single phase central lighting inverter systems that provide sinusoidal emergency AC power to LED, fluorescent and incandescent lighting fixtures.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
DLS-400-120	DLS-400-120	782520868833	Inverter, 120V, 400W, Gray Housing, VRLA Lead Calcium Battery, UL 924, NFPA 101, NFPA 70, OSHA	●				143	143
DLS-400-277	DLS-400-277	782520868840	Inverter, 277V, 400W, Gray Housing, VRLA Lead Calcium Battery, UL 924, NFPA 101, NFPA 70, OSHA	●				143	1
DLS-525-120	DLS-525-120	782520868819	Inverter, 120V, 525W, Gray Housing, VRLA Lead Calcium Battery, UL 924, NFPA 101, NFPA 70, OSHA	●				173	1
DLS-525-277	DLS-525-277	782520868826	Inverter, 277V, 525W, Gray Housing, VRLA Lead Calcium Battery, UL 924, NFPA 101, NFPA 70, OSHA	●				173	1

UFO Battery Packs

Dual-Lite LAMPAK Series emergency fluorescent battery packs are designed to be connected to planned or existing fluorescent fixtures, eliminating the need to install additional emergency lighting units

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
UFO-5AW	UFO-5AW	782520840853	Battery Pack, Fluorescent, 600-700 LMS, 14.4W, Black Housing, UL 924, NFPA 101, NFPA 70		●	●		3	1
UFO-5W	UFO-5W	782520830007	Battery Pack, Fluorescent, 600-700 LMS, 14.4W, Black Housing, UL 924, NFPA 101, NFPA 70	●	●	●		3	1
UFO-6WI	UFO-6WI	782520856212	Battery Pack, Fluorescent, 1100-1400 LMS, 24W, Black Housing, Self-Test, UL 924, NFPA 101, NFPA 70		●	●		3.6	1
UFO-7W	UFO-7W	782520856151	Battery Pack, Fluorescent, 1450-3500 LMS, 57.6W, Black Housing, UL 924, NFPA 101, NFPA 70		●	●		8.8	1
UFO-7WI	UFO-7WI	782520856229	Battery Pack, Fluorescent, 1450-3500 LMS, 57.6W, Black Housing, Self-Test, UL 924, NFPA 101, NFPA 70		●	●		8.8	1
UFO-CF2-CLD	UFO-CF2-CLD	782520864002	Battery Pack, Compact Fluorescent, 860-1250 LMS, Black Housing, UL 924, NFPA 101, NFPA 70		●	●		3.6	1

UFO Series

Dual-Lite LAMPAK Series emergency fluorescent power packs are designed to be connected to planned or existing fluorescent fixtures, eliminating the need to install additional emergency lighting units.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93076105	UFO-3AW	782520868871	Battery Pack, Fluorescent, 350-450 LMS, 9.6W, Black Housing, UL 924, NFPA 101, NFPA 70	●	●	●	●	2.1	1
UFO-4W	UFO-4W	782520821470	Battery Pack, Fluorescent, 500-600 LMS, 14.4W, Black Housing, UL 924, NFPA 101, NFPA 70	●		●	●	2.5	1
93063960	UFO-6W	782520867942	Battery Pack, Fluorescent, 1100-1400 LMS, 24W, Gray Housing, UL 924, NFPA 101, NFPA 70	●	●	●		3.5	1
UFO-CF1	UFO-CF1	782520863982	Battery Pack, Compact Fluorescent, 300-860 LMS, Black Housing, UL 924, NFPA 101, NFPA 70	●	●	●		3	1
93046793	UFO-LED25	782520866501	Battery Pack, LED, 120V, 277V AC Output, 25W, White Housing	●	●	●	●	7.4	1
93039236	UFO-RP1	782520866174	Battery Pack, Reduced Profile Fluorescent, 500 LMS, Gray Housing, UL 924, NFPA 101, NFPA 70	●	●	●	●	1.7	1
93039241	UFO-RP2	782520866181	Battery Pack, Reduced Profile Fluorescent, 700 LMS, Gray Housing, UL 924, NFPA 101, NFPA 70	●	●			2.7	1
93039246	UFO-RP3	782520866198	Battery Pack, Reduced Profile Fluorescent, 1400 LMS, Gray Housing, UL 924, NFPA 101, NFPA 70	●	●	●		3.3	1

Lampak Battery Packs

Dual-Lite Lampak UFO-LP Series low-profile fluorescent emergency ballasts work in conjunction with a low-profile or standard-size electronic AC ballast containing an end-of-life shut down circuit to convert new or existing standard or high output T5 fluorescent fixtures into unobtrusive emergency lighting.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93067812	UFO-LP1	782520868857	Battery Pack, Low Profile Fluorescent, 390-700 LMS, Gray Housing, UL 924, NFPA 101, NFPA 70	●		●		3.5	6
93067813	UFO-LP2	782520868864	Battery Pack, Low Profile, Fluorescent 1250 LMS,, Gray Housing, UL 924, NFPA 101, NFPA 70		●	●		3.4	1

Lampak Remote Test Switch

SPRTS remote test switch and charge indicator provides test and charge indicator capability to a convenient wall location and can be used with Dual-Lite's UFO-3AW, 4W, 5W, 6W, 7W, CF, LP, and LED Series emergency battery packs to provide test and charge indicator capability to a convenient wall location.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
SPRTS	SPRTS	782520856236	Remote Switch, White Housing		●	●		0.2	1

ATSD/ALCR Series

The Auxiliary Transfer Switching Device and Relay Control Device work in conjunction with an emergency lighting inverter or auxiliary generator to power switched and dimmed emergency lighting loads.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
ATSD	ATSD	782520856243	Relay Control, 120/277V, 3A, White Housing, UL 924		●			0.8	1
ATSD20	ATSD20	782520863494	Transfer Switch, 120V-277V, 20A, Gray Housing, NFPA 101, NFPA 70, UL Damp location, UL 1008		●			5.0	6
93095692	ALCR20	782520870997	Relay Control, 120 - 277V, 20A, Gray Housing, NFPA 101, NFPA 70, UL Damp location, UL 924	●	●			5.0	4

ELCR Series

- **UL924 Load Control Relay**
- **120VAC - 277VAC**

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93129393	ELCR	840141418469	Low Profile, Fixture Mount, Plenum Rated, Load Control Relay, UL 924 Listed	●	●			0.45 lbs	1
93129394	ELCTB	840141418476	Remote Test Switch	●	●			0.15 lbs	1



PowerLED PLD Series

The Dual-Lite PLD7 , PLD9 and PLD10 are universal input (120-277V) emergency LED battery packs that work with an AC LED driver to allow an LED lighting load to be used in both normal and emergency operation.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93070839	PLD10	782520868888	Battery Pack, LED, 120V-277V, 10W, Thermoplastic Nickel Cadmium Battery, UL 924, NFPA 101, NFPA 70, UL 1310, CSA C22.2 No. 141, CEC Title 20	●	●	●	●	2.1	1
93078803	PLD10M	782520869335	Battery Pack, LED, 120V-277V, 10W, Galvanized Steel Housing, Nickel Cadmium Battery, UL 924, NFPA 101, NFPA 70, UL 1310, CSA C22.2 No. 141, CEC Title 20	●	●	●	●	3.4	1
93080541	PLD7	782520869656	Battery Pack, LED, 120V-277V, 7W, Green Housing, Nickel Cadmium Battery, UL 924, NFPA 101, NFPA 70, UL 1310, CSA C22.2 No. 141, CEC Title 20	●	●	●	●	1.8	1
93080048	PLD7M	782520869663	Battery Pack, LED, 120V-277V, 7W, Galvanized Steel Housing, Nickel Cadmium Battery, One 24" Conduit, UL 924, NFPA 101, NFPA 70, UL 1310, CSA C22.2 No. 141, CEC Title 20	●	●	●	●	2.3	1
93081950	PLD7M2	782520869670	Battery Pack, LED, 120V-277V, 7W, Galvanized Steel Housing, Nickel Cadmium Battery, Two 24" Conduits, UL 924, NFPA 101, NFPA 70, UL 1310, CSA C22.2 No. 141, CEC Title 20	●	●	●	●	2.5	1
93103194	PLD9-2H	782520871680	Battery Pack, LED, 120V-277V, 9W, 120 Min. Runtime, Thermoplastic Housing, Nickel Cadmium Battery, UL924, NFPA 101, NFPA 70, UL 1310, CEC Title 20	●	●			2.1	1
93104347	PLD9M-2H	782520871697	Battery Pack, LED, 120V-277V, 9W, 120 Min. Runtime, Galvanized Steel Housing, Nickel Cadmium Battery, UL924, NFPA 101, NFPA 70, UL 1310, CEC Title 20	●	●			3.4	1
93080406	PLRTS	782520869410	Remote Switch, White Housing	●	●	●	●	0.20	1

EVC Series

The EVC series is a compact architectural LED combination exit and emergency lighting unit designed for fast installation and reliable service. Remote Capability, Lithium Iron Phosphate Battery, UL 924, NFPA 101, NFPA 70, CEC T20, Damp Location.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93041416	EVCUGW	782520866389	LED Exit and Emergency, Green, Dual Face, 2 Lamp Heads, Ceiling Mount, 120V, 220-240V, 1.65W, 2.42W, white Housing	●	●			0.5	6
93041422	EVCUGWD4	782520866419	LED Exit and Emergency, Green, Dual Face, 2 Lamp Heads, Ceiling Mount, 120V, 220-240V, 1.65W, 2.42W, white Housing	●		●		0.15	6
93041420	EVCUGWDI	782520866433	LED Exit and Emergency, Green, Dual Face, 2 Lamp Heads, Ceiling Mount, 120V, 220-240V, 1.65W, 2.42W, white Housing	●				0.31	6
93041417	EVCURBD	782520866471	LED Exit and Emergency, Red, Dual Face, 2 Lamp Heads, Ceiling Mount, 120V, 220-240V, 1.65W, 2.42W, black Housing	●				0.32	6
93041414	EVCURBD4	782520866488	LED Exit and Emergency, Red, Dual Face, 2 Lamp Heads, Ceiling Mount, 120V, 220-240V, 1.65W, 2.42W, black Housing	●				0.31	6
93041415	EVCURW	782520866372	LED Exit and Emergency, Red, Dual Face, 2 Lamp Heads, Ceiling Mount, 120V, 220-240V, 1.65W, 2.42W, white Housing	●	●	●	●	0.31	6
93041418	EVCURWD	782520866396	LED Exit and Emergency, Red, Dual Face, 2 Lamp Heads, Ceiling Mount, 120V, 220-240V, 1.65W, 2.42W, white Housing	●	●	●		0.31	6
93041421	EVCURWD4	782520866402	LED Exit and Emergency, Red, Dual Face, 2 Lamp Heads, Ceiling Mount, 120V, 220-240V, 1.65W, 2.42W, white Housing	●	●	●	●	0.31	6
93042771	EVCURWD4-0	782520866457	LED Exit and Emergency, Red, Dual Face, 2 Lamp Heads, Ceiling Mount, 120V, 220-240V, 1.65W, 2.42W, white Housing	●	●	●		0.31	6
93042770	EVCURWD4I	782520866440	LED Exit and Emergency, Red, Dual Face, 2 Lamp Heads, Ceiling Mount, 120V, 220-240V, 1.65W, 2.42W, white Housing	●	●			0.31	6
93041419	EVCURWDI	782520866426	LED Exit and Emergency, Red, Dual Face, 2 Lamp Heads, Canopy, Side Mount, 120V, 220-240V, 1.65W, 2.42W, white Housing	●	●			0.31	6

EVE Series

The EVE series is a compact architectural LED exit sign designed for fast installation and reliable service. Nickel Metal Hydride Battery, UL 924, NFPA 101, NFPA 70, CEC T2, Damp Location.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93049532	EVEUGBE	782520866761	LED Exit and Emergency, Green, Ceiling, Wall Mount, 120V, 220-240V, Black Housing		●			0.31	12
93048323	EVEUGW	782520866730	LED Exit and Emergency, Green, Ceiling, Wall Mount, 120V, 220-240V, White Housing	●				0.31	12
93048324	EVEUGWE	782520866747	LED Exit and Emergency, Green, Ceiling, Wall Mount, 120V, 220-240V, White Housing	●				0.31	12
93048325	EVEUGWEI	782520866754	LED Exit and Emergency, Green, Ceiling, Wall Mount, 120V, 220-240V, White Housing	●				0.31	12
93048326	EVEURB	782520866716	LED Exit and Emergency, Red, Ceiling, Wall Mount, 120V, 220-240V, Black Housing	●	●			0.55	12
93048327	EVEURBE	782520866723	LED Exit and Emergency, Red, Ceiling, Wall Mount, 120V, 220-240V, Black Housing		●			0.41	12
93048320	EVEURW	782520866662	LED Exit and Emergency, Red, Ceiling, Wall Mount, 120V, 220-240V, White Housing	●	●	●		0.35	12
93049531	EVEURW-2C	782520866709	LED Exit and Emergency, Red, Ceiling, Wall Mount, 120V, 220-240V, White Housing	●				0.35	12
93048321	EVEURWE	782520866679	LED Exit and Emergency, Red, Ceiling, Wall Mount, 120V, 220-240V, White Housing,	●	●	●		0.35	12
93048322	EVEURWEI	782520866686	LED Exit and Emergency, Red, Ceiling, Wall Mount, 120V, 220-240V, White Housing	●	●			0.35	12

EVE4X Series

EVE4X series LED exit signs meet NEMA 4X IP66 standards, the housing is watertight and corrosion resistant, and is designed for Indoor or Outdoor application. Nickel Metal Hydride Battery, UL 924, NFPA 101, NFPA 70, NEMA 4X, IP66.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93075407	EVE4XRW	782520868994	LED Exit and Emergency, Red, Single Face, Wall Mount, 120V, 277V, 1.2W, White Housing	●	●			0.31	1
93075411	EVE4XRWE	782520869038	LED Exit and Emergency, Red, Single Face, Wall Mount, 120V, 277V, White Housing	●	●			0.31	1

LT Series

Low-profile, easy to install emergency lighting unit/exit sign tandem models feature high-output halogen lamps. Available in remote capacity and damp location versions. Remote Capability, Lead-Calcium Battery, UL 924, NFPA 101, NFPA 70, Damp Location.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
LTUGWV11	LTUGW	782520864194	LED Exit and Emergency, Halogen, Green, Dual Face, 2 Lamp Heads, Ceiling, Wall, End, Pendant Mount, 120V, 220-240V, 3W, 10W, white Housing			●		14.95	4
LTURBV11	LTURB	782520864200	LED Exit and Emergency, Halogen, Red, Dual Face, 2 Lamp Heads, Ceiling, Wall, End, Pendant Mount, 120V, 220-240V, 3W, black Housing	●	●			25.2	4
LTURB3V11	LTURB3	782520864248	LED Exit and Emergency, Halogen, Red, Dual Face, 2 Lamp Heads, Ceiling, Wall, End, Pendant Mount, 120V, 220-240V, 3W, black Housing	●				21.6	4
LTURWV11	LTURW	782520864187	LED Exit and Emergency, Halogen, Red, Dual Face, 2 Lamp Heads, Ceiling, Wall, End, Pendant Mount, 120V, 220-240V, 3W, 10W, white Housing	●		●	●	19.55	4
LTURW3V11	LTURW3	782520864217	LED Exit and Emergency, Halogen, Red, Dual Face, 2 Lamp Heads, Ceiling, Wall, End, Pendant Mount, 120V, 220-240V, 3W, 15W, white Housing	●	●	●	●	29.2	4
LTURW3-0	LTURW3-0	782520849184	LED Exit and Emergency, Halogen, Red, Dual Face, 2 Lamp Heads, Ceiling, Wall, End, Pendant Mount, 120V, 220-240V, 3W, 15W, white Housing		●	●		8	4
LTURWDV11	LTURWD	782520864224	LED Exit and Emergency, Halogen, Red, Dual Face, 2 Lamp Heads, Ceiling, Wall, End, Pendant Mount, 120V, 220-240V, 3W, 10W, white Housing		●			8	4
LTURWDIV11	LTURWDI	782520864231	LED Exit and Emergency, Halogen, Red, Dual Face, 2 Lamp Heads, Ceiling, Wall, End, Pendant Mount, 120V, 220-240V, 3W, 10W, white Housing	●	●			9.3	4

SE Series

Exit sign is constructed of high-strength cast aluminum in a choice of textured white, white with brushed face, black or black with brushed face finish. UL 924, NFPA 101, NFPA 70, OSHA, CEC T2, Damp Location.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
SEDGBNV11	SEDGBN	782520864316	LED Exit and Emergency, Green, Dual Face, Universal Mount, 120V, 220-240V, 2.1W, White, Black Housing	●				23.15	6
SEDGBNE	SEDGBNE	782520847630	LED Exit and Emergency, Green, Universal Mount, 120V, 220-240V, Black Housing, Nickel Metal Hydride Battery		●			23.15	6
SEDGWV11	SEDGW	782520864347	LED Exit and Emergency, Green, Dual Face, Universal Mount, 120V, 220-240V, 2.1W, White Housing	●				8.4	6
SEDGWEV11	SEDGWE	782520864354	LED Exit and Emergency, Green, Dual Face, Universal Mount, 120V, 220-240V, 3.5W, White Housing	●				6	6
SEDRBV11	SEDRB	782520864408	LED Exit and Emergency, Red, Dual Face, Universal Mount, 120V, 220-240V, 2.6W, Black Housing	●				6	6
SEDRBNV11	SEDRBN	782520864439	LED Exit and Emergency, Red, Dual Face, Universal Mount, 120V, 220-240V, 2.6W, Black Housing	●				7.25	6
SEDRBNEV11	SEDRBNE	782520864446	LED Exit and Emergency, Red, Dual Face, Universal Mount, 120V, 220-240V, 3.8W, Black Housing	●	●			4	6
SEDRBNEI	SEDRBNEI	782520847777	LED Exit and Emergency, Red, Dual Face, Universal Mount, 120V, 220-240V, 3.8W, Black Housing	●				5	6
SEDRWV11	SEDRW	782520864460	LED Exit and Emergency, Red, Dual Face, Universal Mount, 120V, 220-240V, 2.6W, White Housing	●	●			5	6
SEDRWEV11	SEDRWE	782520864477	LED Exit and Emergency, Red, Dual Face, Universal Mount, 120V, 220-240V, 3.8W, White Housing	●	●	●		1	6
SEDRWEIV11	SEDRWEI	782520864484	LED Exit and Emergency, Red, Dual Face, Universal Mount, 120V, 220-240V, 3.8W, White Housing	●	●			2.2	6
SEDRWNV11	SEDRWN	782520864491	LED Exit and Emergency, Red, Single Face, Universal Mount, 120V, 220-240V, 2.6W, White, Black Housing	●				2.2	6
SESGBV11	SESGB	782520865009	LED Exit and Emergency, Green, Single Face, Universal Mount, 120V, 220-240V, 2.1W, White, Black Housing	●				10	6
SESGBNV11	SESGBN	782520865030	LED Exit and Emergency, Green, Single Face, Universal Mount, 120V, 220-240V, 2.1W, Black Housing	●	●			10	6
SESGBNEV11	SESGBNE	782520865047	LED Exit and Emergency, Green, Single Face, Universal Mount, 120V, 220-240V, 3.5W, Black Housing		●			1	6
SESGWV11	SESGW	782520847548	LED Exit and Emergency, Green, Single Face, Universal Mount, 120V, 220-240V, 2.1W, White Housing	●	●			0.6	6
SESGWEV11	SESGWE	782520865078	LED Exit and Emergency, Green, Single Face, Universal Mount, 120V, 220-240V, 3.5W, White Housing	●	●			6.75	6
SESGWEIV11	SESGWEI	782520865085	LED Exit and Emergency, Green, Single Face, Universal Mount, 120V, 220-240V, 3.5W, White Housing	●	●			11	6
SESGWNV11	SESGWN	782520865092	LED Exit and Emergency, Green, Single Face, Universal Mount, 120V, 220-240V, 2.1W, White, Black Housing	●	●			6.75	6
SESRBV11	SESRB	782520865122	LED Exit and Emergency, Red, Single Face, Universal Mount, 120V, 220-240V, 2.6W, Black Housing	●				6.75	6
SESRBE	SESRBE	782520847562	LED Exit and Emergency, Red, Single Face, Universal Mount, 120V, 220-240V, 3.8W, Black Housing	●	●			11	6
SESRBNV11	SESRBN	782520865153	LED Exit and Emergency, Red, Single Face, Universal Mount, 120V, 220-240V, 2.6W, Black Housing	●	●	●		40	6
SESRBNEV11	SESRBNE	782520865160	LED Exit and Emergency, Red, Single Face, Universal Mount, 120V, 220-240V, 3.8W, Black Housing	●	●	●		22	6
SESRBNEIV11	SESRBNEI	782520865177	LED Exit and Emergency, Red, Single Face, Universal Mount, 120V, 220-240V, 3.8W, Black Housing	●	●			3	6
SESRWV11	SESRW	782520865184	LED Exit and Emergency, Red, Single Face, Universal Mount, 120V, 220-240V, 2.6W, White Housing	●	●	●		3	6
SESRWEV11	SESRWE	782520865191	LED Exit and Emergency, Red, Single Face, Universal Mount, 120V, 220-240V, 3.8W, White Housing	●	●	●		1	6
SESRWEIV11	SESRWEI	782520865207	LED Exit and Emergency, Red, Single Face, Universal Mount, 120V, 220-240V, 3.8W, White Housing	●	●	●		2	6
SESRWNV11	SESRWN	782520865214	LED Exit and Emergency, Red, Single Face, Universal Mount, 120V, 220-240V, 2.6W, White Housing	●				1	6
SESRWNEIV11	SESRWNEI	782520865238	LED Exit and Emergency, Red, Single Face, Canopy, Universal Mount, 120V, 220-240V, 3.8W, White, Black Housing	●				2	6

DPL Series

The DPL Series of photoluminescent exit signage offers exit compliance with UL listed legible viewing distances of 50', 75' and 100'. The DPL photoluminescent exit signs do not require AC or electrical power. ALl signs have a 25 year lifecycle.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93099294	DPLPM75SR	782520871062	Photoluminescent Exit, Red, Single Face, Wall, Ceiling Mount	●	●			0.4	10
93099308	DPLA75DG	782520871192	Photoluminescent Exit, Green, Dual Face, Wall, Ceiling Mount	●				0.45	10
93099307	DPLA75DR	782520871185	Photoluminescent Exit, Red, Dual Face, Wall, Ceiling Mount	●	●			0.45	10
93099306	DPLA75SG	782520871178	Photoluminescent Exit, Green, Single Face, Wall, Ceiling Mount	●				0.45	10
93099305	DPLA75SR	782520871161	Photoluminescent Exit, Red, Single Face, Wall, Ceiling Mount	●	●			0.45	10
93099290	DPLAF50DG	782520871024	Photoluminescent Exit, Green, Dual Face, Wall, Ceiling Mount	●				0.41	10
93099291	DPLAF50DR	782520871031	Photoluminescent Exit, Red, Dual Face, Wall, Ceiling Mount	●	●			0.43	10
93099288	DPLAF50SG	782520871000	Photoluminescent Exit, Green, Single Face, Wall, Ceiling Mount	●				0.45	10
93099289	DPLAF50SR	782520871017	Photoluminescent Exit, Red, Single Face, Wall, Ceiling Mount	●	●			0.43	10
93099293	DPLP100SG	782520871055	Photoluminescent Exit, Green, Dual Face, Wall, Ceiling Mount	●				0.39	10
93099292	DPLP100SR	782520871048	Photoluminescent Exit, Red, Single Face, Wall, Ceiling Mount	●	●			0.43	10
93099302	DPLPM50DBA	782520871130	Photoluminescent Exit, Dual Face, Wall, Ceiling Mount	●	●			0.45	10
93099304	DPLPM50DG	782520871154	Photoluminescent Exit, Green, Dual Face, Wall, Ceiling Mount	●				0.45	10
93099303	DPLPM50DR	782520871147	Photoluminescent Exit, Red, Dual Face, Wall, Ceiling Mount	●	●			0.42	10
93099299	DPLPM50SBA	782520871109	Photoluminescent Exit, Dual Face, Wall, Ceiling Mount	●	●			0.43	10
93099301	DPLPM50SG	782520871123	Photoluminescent Exit, Green, Single Face, Wall, Ceiling Mount	●				0.45	10
93099300	DPLPM50SR	782520871116	Photoluminescent Exit, Red, Dual Face, Wall, Ceiling Mount	●	●			0.43	10
93099297	DPLPM75DG	782520871093	Photoluminescent Exit, Green, Dual Face, Wall, Ceiling Mount	●				0.39	10
93099296	DPLPM75DR	782520871086	Photoluminescent Exit, Red, Dual Face, Wall, Ceiling Mount	●	●			0.4	10
93099295	DPLPM75SG	782520871079	Photoluminescent Exit, Green, Single Face, Wall, Ceiling Mount	●				0.42	10

SEWL Series

For Indoor/Outdoor applications requiring a die-cast aluminum exit sign with long-life LED illumination, a wet location listing and a vandal-resistant hardware (accessory). NFPA 101, NFPA 70, OSHA, CEC T20, Wet Location, IP66. Industrial NEMA 4X Die-Cast Exit Sign, NEMA4X , UL Sanitation Certified, Spectron Self-Test/Self-Diagnostics.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
SEWLDGBE	SEWLDGBE	782520862374	LED Exit and Emergency, Green, Single Face, Wall, Ceiling Mount, 120V, 277V, 1.8W, 2.8W, 8.3W, Black Housing, UL 924, UL Type 4X, UL Sanitation	●				2	5
SEWLDGWE	SEWLDGWE	782520862398	LED Exit and Emergency, Green, Single Face, Wall, Ceiling Mount, 120V, 277V, 1.8W, 2.8W, 8.3W, white Housing, UL 924, UL Type 4X, UL Sanitation	●				4	5
SEWLDRBE	SEWLDRBE	782520862367	LED Exit and Emergency, Red, Single Face, Wall, Ceiling Mount, 120V, 277V, 2.1W, 3.1W, 8.7W, Black Housing, UL 924, UL Type 4X, UL Sanitation	●				3	5
SEWLDRWE	SEWLDRWE	782520862381	LED Exit and Emergency, Red, Single Face, Wall, Ceiling Mount, 120V, 277V, 2.1W, 3.1W, 8.7W, white Housing, UL 924, UL Type 4X, UL Sanitation	●				5	5
SEWLSGBE	SEWLSGBE	782520862336	LED Exit and Emergency, Green, Single Face, Wall, Ceiling Mount, 120V, 277V, 1.8W, 2.8W, 8.3W, Black Housing, UL 924, UL Type 4X, UL Sanitation	●				3	5
SEWLSRBE	SEWLSRBE	782520862329	LED Exit and Emergency, Green, Single Face, Wall, Ceiling Mount, 120V, 277V, 2.1W, 3.1W, 8.7W, Black Housing, UL 924, UL Type 4X, UL Sanitation	●	●			1	5
SEWLSRWE	SEWLSRWE	782520862343	LED Exit and Emergency, Red, Single Face, Wall, Ceiling Mount, 120V, 277V, 2.1W, 3.1W, 8.7W, white Housing, UL 924, UL Type 4X, UL Sanitation	●	●			3	5
93093120	SEWLSRW	782520869991	LED Exit and Emergency, Single Face, Red Letters, White Housing, AC Only	●	●			9.5	4
93093121	SEWLDRW	782520870010	LED Exit and Emergency, Double Face, Red Letters, White Housing, AC Only	●	●			9.5	4
93093122	SEWLSRWE	782520870034	LED Exit and Emergency, Single Face, Red Letters, White Housing, Emergency with Battery	●	●			9.5	4
93093123	SEWLDRWE	782520870058	LED Exit and Emergency, Double Face, Red Letters, White Housing, Emergency with Battery	●	●			9.5	4
93093124	SEWLSGW	782520870072	LED Exit and Emergency, Single Face, Green Letters, White Housing, Emergency with Battery	●				9.5	4
93093126	SEWLSGWE	782520870089	LED Exit and Emergency, Single Face, Green Letters, White Housing, Emergency with Battery	●				9.5	4
93093128	SEWLSRB	782520870171	LED Exit and Emergency, Single Face, Red Letters, Black Housing, AC Only	●	●			9.5	4
93093129	SEWLDRB	782520870188	LED Exit and Emergency, Double Face, Red Letters, Black Housing, AC Only	●	●			9.5	4
93093130	SEWLSRBE	782520870232	LED Exit and Emergency, Single Face, Red Letters, Black Housing, Emergency with Battery	●	●			9.5	4
93093132	SEWLSGB	782520870256	LED Exit and Emergency, Single Face, Green Letters, Black Housing, AC Only	●	●			9.5	4

10-Day Quick Ship Ordering Guide
Order Limit Per Fixture Selection: 50

MODEL	FACES	LETTER COLOR	HOUSING COLOR	OPERATION	OPTIONS
SEWL	S Single D Double	R R G Green	W White B Black	Blank AC Only E Emergency	-HTR Internal Heater[1] -4X NEMA 4X, IP66 rating[2]

Ordering Notes:
[1] For use with emergency models only
[2] Heater comes standard with -4X option on emergency models

CLSC Series

The CLSC Series is a Chicago Approved combination exit/emergency light that uses 2 each 5W adjustable white LED lamp-heads to provide emergency lighting for the required 120 minutes.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93074313	CLSCSRW-3	856143002148	Chicago Approved, Red, Single Face, 2 Lamp Heads, Wall Mount, 120V, 277V, 5.3W, white Housing, City of Chicago, NFPA 101, UL 924, OSHA			●		0.23	2
93079447	CLSCSRW-NP	782520869236	Chicago Approved, Red, Single Face, 2 Lamp Heads, Wall Mount, 120V, 277V, 5.3W, white Housing, City of Chicago, NFPA 101, UL 924, OSHA			●		0.24	2
93079448	CLSCSRW-NPRC	782520869243	Chicago Approved, Red, Single Face, 2 Lamp Heads, Wall Mount, 120V, 277V, 5.3W, white Housing, Remote Capability, City of Chicago, NFPA 101, UL 924, OSHA			●		0.4	2

CLS Series

The CLS Series offers bright and even LED "EXIT" or "STAIRS" glass panel illumination with Red letters, white LED's and a 20 gauge, durable steel housing. Features include AC or Emergency operation in single or double face. 120/277 VAC input. City of Chicago approved. Nickel Cadmium Battery, UL 924, NFPA 101, NFPA 70, CEC T2.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93073299	CLSS3	782520868901	LED Exit and Emergency, Red, Single Face, Ceiling, Wall, End Mount, 120V, 277V, 5W, White Housing			●		0.25	10
93073297	CLSSE3	782520868895	LED Exit and Emergency, Red, Single Face, Ceiling, Wall, End Mount, 120V, 277V, 5W, White Housing			●		0.4	10
93079446	CLSSE-NPE	782520869229	LED Exit and Emergency, Red, Single Face, Ceiling, Wall, End Mount, 120V, 277V, 5W, White Housing			●		0.25	10
93079445	CLSS-NPE	782520869212	LED Exit and Emergency, Red, Single Face, Ceiling, Wall, End Mount, 120V, 277V, 5W, White Housing			●		0.52	10
93079454	CP11-SDA	782520869304	LED Exit and Emergency, Red, Single Face, Ceiling, Wall, End Mount, 120V, 277V, 5W, White Housing			●		37	10
93079450	CP12-EDA	782520869267	LED Exit and Emergency, Red, Single Face, Ceiling, Wall, End Mount, 120V, 277V, 5W, White Housing			●		27	10
93079453	CP2-SNA	782520869298	LED Exit and Emergency, Red, Single Face, Ceiling, Wall, End Mount, 120V, 277V, 5W, White Housing			●		0.84	10
93079449	CP3-ENA	782520869250	LED Exit and Emergency, Red, Single Face, Ceiling, Wall, End Mount, 120V, 277V, 5W, White Housing			●		21	10
93079455	CP5-SRA	782520869311	LED Exit and Emergency, Red, Single Face, Ceiling, Wall, End Mount, 120V, 277V, 5W, White Housing			●		21	10
93079451	CP6-ERA	782520869274	LED Exit and Emergency, Red, Single Face, Ceiling, Wall, End Mount, 120V, 277V, 5W, White Housing			●		0.21	10
93079456	CP8-SLA	782520869328	LED Exit and Emergency, Red, Single Face, Ceiling, Wall, End Mount, 120V, 277V, 5W, White Housing			●		23.15	10
93079452	CP9-ELA	782520869281	LED Exit and Emergency, Red, Single Face, Ceiling, Wall, End Mount, 120V, 277V, 5W, White Housing			●		22.5	10

Obsidian™

The Obsidian Message Sign provides a reliable method to communicate critical messaging. The high contrast face panel clearly communicates the message in highly visible red or green letters when the sign is energized. In the off condition, the face becomes black without any message bleed through - eliminating any confusion.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93086495	OBN-KIT DIFF SW16	782520869779	LED Message Sign, Single Face, Wall, Ceiling Mount, 120V, 277V, 11W, 12W, White, Black Housing	●	●			1	30
93086496	OBN-KIT DIFF SW17	782520869786	LED Message Sign, Single Face, Wall, Ceiling Mount, 120V, 277V, 11W, 12W, White, Black Housing	●	●			1	30
93086497	OBN-KIT DIFF SW18	782520869793	LED Message Sign, Single Face, Wall, Ceiling Mount, 120V, 277V, 11W, 12W, White, Black Housing	●	●			1	30
93086498	OBN-KIT DIFF SW19	782520869809	LED Message Sign, Single Face, Wall, Ceiling Mount, 120V, 277V, 11W, 12W, White, Black Housing	●	●			1	30
93086499	OBN-KIT DIFF SW20	782520869816	LED Message Sign, Single Face, Wall, Ceiling Mount, 120V, 277V, 11W, 12W, White, Black Housing	●	●			1	30
93086500	OBN-KIT DIFF SW21	782520869823	LED Message Sign, Single Face, Wall, Ceiling Mount, 120V, 277V, 11W, 12W, White, Black Housing		●			1	30
93086502	OBN-KIT DIFF SW26	782520869847	LED Message Sign, Single Face, Wall, Ceiling Mount, 120V, 277V, 11W, 12W, White, Black Housing	●	●			1	30
93086494	OBN-KIT DIFF SW8	782520869762	LED Message Sign, Single Face, Wall, Ceiling Mount, 120V, 277V, 11W, 12W, White, Black Housing	●	●			0.1	30
93086489	OBNUSGB-NP	782520869717	LED Message Sign, Green, Single Face, Wall, Ceiling Mount, 120V, 277V, 12W, White, Black Housing	●	●			12.6	30
93086488	OBNUSGW-NP	782520869700	LED Message Sign, Green, Single Face, Wall, Ceiling Mount, 120V, 277V, 12W, White, Black Housing	●				12.6	30
93086487	OBNUSRB-NP	782520869694	LED Message Sign, Red, Single Face, Wall, Ceiling Mount, 120V, 277V, 11W, White, Black Housing	●	●			12.6	30
93086486	OBNUSRW-NP	782520869687	LED Message Sign, Red, Single Face, Wall, Ceiling Mount, 120V, 277V, 11W, White, Black Housing	●	●			12.6	30
93086501	OBN-KIT DIFF SW23	782520869830	LED Message Sign, Single Face, Wall, Ceiling Mount, 120V, 277V, 11W, 12W, White, Black Housing		●			1	30
93086503	OBN-KIT DIFF SW28	782520869854	LED Message Sign, Single Face, Wall, Ceiling Mount, 120V, 277V, 11W, 12W, White, Black Housing	●				0.2	30
93086492	OBN-KIT DIFF SW4	782520869748	LED Message Sign, Single Face, Wall, Ceiling Mount, 120V, 277V, 11W, 12W, White, Black Housing	●	●			12.6	30
93086493	OBN-KIT DIFF SW6	782520869755	LED Message Sign, Single Face, Wall, Ceiling Mount, 120V, 277V, 11W, 12W, White, Black Housing	●				0.2	30
93086490	OBN-RMK	782520869724	LED Message Sign, Red, Single Face, Wall, Ceiling Mount, 120V, 277V, 11W, White, Black Housing	●				0.1	30

HCX Series

The HCX Series combination emergency unit/LED exit sign models utilize high output halogen lamps to offer a decorative yet systematic approach to indoor and outdoor paths of egress and signage from one central location. Remote Capability, Lead-Calcium Battery, UL 924, NFPA 101, NFPA 70, CEC T20.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
HCXUGW	HCXUGW	782520860479	LED Exit and Message Signs, Halogen Emergency Lighting, Green, Dual Face, 2 Lamp Heads, Canopy, Side Mount, 120V, 277V, 3W, 5W, white Housing	●		●		1.5	6
HCXUGW-0-RC12	HCXUGW-0-RC12	782520862039	LED Exit and Message Signs, Halogen Emergency Lighting, Green, Dual Face, 2 Lamp Heads, Canopy, Side Mount, 120V, 277V, 3W, 5W, white Housing	●	●			1.5	6
HCXUGWRC12	HCXUGWRC12	782520861223	LED Exit and Message Signs, Halogen Emergency Lighting, Green, Dual Face, 2 Lamp Heads, Canopy, Side Mount, 120V, 277V, 3W, 5W, white Housing	●				1.5	6
HCXURB	HCXURB	782520861193	LED Exit and Message Signs, Halogen Emergency Lighting, Red, Dual Face, 2 Lamp Heads, Canopy, Side Mount, 120V, 277V, 3W, 5W, black Housing	●				1.5	6
HCXURW	HCXURW	782520860462	LED Exit and Message Signs, Halogen Emergency Lighting, Red, Dual Face, 2 Lamp Heads, Canopy, Side Mount, 120V, 277V, 3W, 5W, white Housing	●		●	●	1.5	6
HCXURW-0-RC12	HCXURW-0-RC12	782520862022	LED Exit and Message Signs, Halogen Emergency Lighting, Red, Dual Face, 2 Lamp Heads, Canopy, Side Mount, 120V, 277V, 3W, 5W, white Housing	●		●		1.5	6
HCXURWRC12	HCXURWRC12	782520861216	LED Exit and Message Signs, Halogen Emergency Lighting, Red, Dual Face, 2 Lamp Heads, Canopy, Side Mount, 120V, 277V, 3W, 5W, white Housing	●	●	●	●	1.5	6

CCEL Series

The CCEL Series offers bright, even and highly reliable LED illumination with direction configurable STAIRS or EXIT acrylic panels. The surface mount design can be top, end or ceiling mounted by use of a supplied canopy. The recessed design can be ceiling or wall mounted by selection and includes a back-box.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93104229	CCELR-WALLKIT	782520871529	LED Exit and Emergency			●		1.25	1
93104261	CCELR-WALLKIT-STAIRS	782520871550	LED Exit and Emergency			●		1.25	1
93103609	CCELRWA-NP	782520871338	LED Exit and Emergency			●		4.4	1
93104259	CCELRWA-NPS	782520871536	LED Exit and Emergency			●		4.4	1
93103611	CCELRWE-NP	782520871352	LED Exit and Emergency			●		4.4	1
93104260	CCELRWE-NPS	782520871543	LED Exit and Emergency			●		1.25	1
93103607	CCELSWA-NP	782520871314	LED Exit and Emergency			●		1.25	1
93103610	CCELSWA-NPS	782520871345	LED Exit and Emergency			●		3	1
93103608	CCELSWE-NP	782520871321	LED Exit and Emergency			●		7.5	1
93103612	CCELSWE-NPS	782520871369	LED Exit and Emergency			●		7.5	1

LE Series

Edge-Lit LED Architectural Exit Signs featuring elegant styling, easy installation and energy-saving, long-life LED lamps. Models are available for recessed ceiling, wall or end mounting.

10-Day Quick Ship Ordering Guide
Order Limit Per Fixture Selection: 50

LE [ ] [ ] [ ] [ ] N [ ] [ ] [ ]

MODEL

MOUNTING
- **C** Ceiling mount
- **W** Wall mount
- **E** End Mount

FACES
- **S** Single
- **D** Double*

* Not for use with wall mounted models

LETTER COLOR
- **R** Red
- **G** Green

DIRECTIONAL ARROWS
- **X** No arrows EXIT
- **R** Right arrow*
- **L** Left arrow*
- **D** Double arrows
- **C** L/R arrows**

* Not for use with double face models. Use "C" L/R arrow designator
** Double face models only. Provides reversible right or left arrow indicator.

TRIM/HOUSING FINISH
- **N** Satin Aluminum

OPERATION
- **A** AC only
- **E** Emergency

SELF-DIAGNOSTIC
- **Blank** None
- **I** Spectron self-testing/ self-diagnostic electronics*

*** For use with emergency models only**

OPTIONS
- **-2C** 2-circuit operation [2,5]
- **-FAP** Fire alarm panel interface [3,5,6]
- **-FM** Flasher module [1,6]
- **-AF** Audible flasher module [1,6]
- **-DC** Remote DC operation [2,4,5]
- **-24K** 220-240VAC, 60Hz. operation [9]
- **-XK** Recessed mount exit sign less rough-in kit [7,9]
- **-W** White plaque background
- **-M** Mirror-plaque background [8]
- **-8L** 8 inch letter plaque (red letters only) [10,11]

ACCESSORIES (ORDER SEPARATELY)
- **URK** Universal rough-in kit
- **URK2C** Universal 2-circuit rough-in kit [a,b,c]

[a]For use with AC models only.
[b]Rough-in kit may not be ordered separately on models specified with -24K option.
[c]Must be ordered in conjunction with -2C option on exit sign

To Order Rough-In Kit Separately
To order rough-in kit only for field installation, add "-XK" option suffix to exit model number and order "URK" or "URK2C" kit separately.

[1]For use with emergency models only.
[2]For use with AC models only.
[3]Operates with 24-volt AC or DC fire alarm panels.
[4]For emergency illumination of sign from remote 6-24VDC power sources.
[5]-DC option may not be specified with -2C or -FAP options.
[6]-AF, -FM and -FAP options may not be specified together.
[7]Allows ordering of rough-in kit separately for recessed mount (LE) models.

See "Accessories".
[8]For use with single face models only. Standard on double face models.
[9]Rough-in kit may not be ordered separately on models specified with -24K option.
[10]LE exit models with 8" plaques registered under NY-BEC Calendar number 42135 for use in New York City.
[11]Single face LE exit signs specified with the -8L option are supplied without backgrounds. Double face models specified with the -8L option are supplied with mirror backgrounds.

LES Series

- **Surface Mounting Edge-Lit LED Exit Sign**
- **AC or Emergency**
- **Single/Double Face**

10-Day Quick Ship Ordering Guide
Order Limit Per Fixture Selection: 50

LES [ ] [ ] [ ] [ ] [ ] [ ] [ ] [ ]

MODEL

MOUNTING
- **C** Ceiling mount
- **W** Wall mount
- **E** End Mount

FACES
- **S** Single
- **D** Double*

* Not for use with wall mounted models

LETTER COLOR
- **R** Red
- **G** Green

DIRECTIONAL ARROWS
- **X** No arrows EXIT
- **R** Right arrow*
- **L** Left arrow*
- **D** Double arrows
- **C** L/R arrows**

* Not for use with double face models. Use "C" L/R arrow designator
** Double face models only. Provides reversible right or left arrow indicator.

TRIM/HOUSING FINISH
- **N** Satin Aluminum

OPERATION
- **A** AC only
- **E** Emergency

SELF-DIAGNOSTICS
- **Blank** None
- **I** Spectron® Self-testing/ Self-diagnostic electronics*

*** For use with emergency models only**

OPTIONS
- **-W** White plaque background
- **-M** Mirror-plaque background [1]

[1]For use with single face models only. Standard on double face models.

CCU2

Chicago LED specific to City of Chicago code requirements. Sealed Lead Acid Battery, UL 924, NFPA 101, NFPA 70, City of Chicago, Damp Location, NEC, OSHA.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93076245	CCU2	782520869113	LED Emergency Light, 2 Lamp Heads, Wall Mount, 120V, 277V, 8.7W, White Housing			●		8	4
93076246	CCU2RC	782520869120	LED Emergency Light, 2 Lamp Heads, Wall Mount, 120V, 277V, 20W, White Housing, Remote Capability			●		8	4

CRU

The CRU is a Damp Location Listed, City of Chicago Approved Steel Recessed Unit. Sealed Lead Acid Battery, UL 924, NFPA 101, NFPA 70, City of Chicago, Damp Location, NEC, OSHA.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93076359	CRU	782520869175	Chicago Recessed Unit, 2 Lamp Heads, Ceiling, Recessed Mount, 120V, 277V, 27W, White Housing			●		0.75	2
93076360	CRURC	782520869182	Chicago Recessed Unit, 2 Lamp Heads, Ceiling, Recessed Mount, 120V, 277V, 50W, White Housing, Remote Capability			●		3.25	2

EVR Series

The EV Series is a compact architectural emergency lighting unit designed for fast wall mount installation and reliable service. The EV unit is available with or without remote capacity. The EV series includes the EVR – 2 head LED indoor remote, and the EVO – single or double-head outdoor remote as an accessory. Nickel Metal Hydride Battery, UL 924, RoHS, CEC T20.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93036789	EVR2	782520865535	LED Emergency Remote, 2 Lamp Heads, 88 LMS Per LED, Wall, Ceiling Mount, 120V, 277V, White Housing	●	●		●	0.18	12
93036790	EVR2B	782520865542	LED Emergency Remote, 2 Lamp Heads, 88 LMS Per LED, Wall, Ceiling Mount, 120V, 277V, Black Housing	●				0.18	12

EVHCR Series

The EVHC series is a high lumen output emergency lighting unit designed for high mounting height applications.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93050690	EVHCR2	782520867249	LED Emergency Remote, 2 Lamp Heads, Wall Mount, 120V, 277V, White Housing, Lithium Iron Phosphate Battery	●		●		0.18	6

EVO Series

Architecturally styled high performance LED remote for outdoor application which accepts DC input from the EV4 emergency light with remote capacity.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93041100	EVODB	782520866259	Remote Head, Outdoor, Single Face, 2 Lamp Heads, 88 LMS, 145 LMS, Wall Mount, 4.8V, 1W, 2W, Black Housing, Damp listed	●	●	●	●	0.19	12
93041099	EVOSB	782520866242	Remote Head, Outdoor, Single Face, 2 Lamp Heads, 90 LMS, 145 LMS, Wall Mount, 4.8V, 1W, 2W, Black Housing, Damp listed	●		●		0.18	12
93041098	EVODW	782520866235	Remote Head, Outdoor, Single Face, 2 Lamp Heads, 89 LMS, 145 LMS, Wall Mount, 4.8V, 1W, 2W, White Housing, Damp listed	●	●	●		0.33	12
93041097	EVOSW	782520866228	Remote Head, Outdoor, Single Face, 2 Lamp Heads, 91 LMS, 145 LMS, Wall Mount, 4.8V, 1W, 2W, White Housing, Damp listed	●		●	●	0.18	12

CPR

Indoor Injection Molded Thermoplastic Remote Lighting Heads. Matches HCX Combination Emergency Lighting Unit/LED Exit Sign Styling.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
CPRDB0605	CPRDB0605	782520861186	Remote Head, Indoor, 2 Lamp Heads, Wall Mount, 6V, 5W, Black Housing, Damp listed		●			21	12

Dynamo Remote Series

The DYNR is a matching LED remote for the Dynamo Family. Available in wet/Nema 4X or food processing option. Food processing option adds a shield. Single or double lamp-head. Designed for -22°F to 122°F (-30°C to 50°C).

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93059703	DYNRD-4X	782520867591	Industrial LED Exit and Emergency, 2 Lamp Heads, Wall Mount, 120V, 277V, 6W, Gray Housing, Lithium Iron Phosphate Battery, UL 924, NEMA 4, 4X, UL Sanitation, UL 844, IP66, NEC Class 1 Division 2 Groups A, B, C, D, NEC Class 2 Division 1 Groups E, F and G, NEC Class 3, CEC T21	●	●			0.63	4
93059702	DYNRS-4X	782520867584	Industrial LED Exit and Emergency, 2 Lamp Heads, Wall Mount, 120V, 277V, 6W, Gray Housing, Lithium Iron Phosphate Battery, UL 924, NEMA 4, 4X, UL Sanitation, UL 844, IP66, NEC Class 1 Division 2 Groups A, B, C, D, NEC Class 2 Division 1 Groups E, F and G, NEC Class 3, CEC T21	●	●			0.66	4

CRH

LED Single or Double Remote Heads Designed for City of Chicago Approved Products.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93076288	CRHI	782520869137	Remote Head, Indoor, 1 Lamp Head, Wall, Ceiling Mount, 6V, 5.3W, White Housing	●	●	●	●	1	12
93076289	CRHI2	782520869144	Remote Head, Indoor, 2 Lamp Heads, Wall, Ceiling Mount, 6V, 5.3W, White Housing	●	●	●	●	1.2	20
93076290	CRHO	782520869151	Remote Head, Outdoor, 1 Lamp Head, Wall, Ceiling Mount, 6V, 5.3W, Grey Housing	●	●	●	●	1	12
93076291	CRHO2	782520869168	Remote Head, Outdoor, 2 Lamp Heads, Wall, Ceiling Mount, 6V, 5.3W, Grey Housing	●	●	●	●	1.2	20

OCR Series

Decorative outdoor lamp heads and mounting plate assemblies.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
OCRDB0605	OCRDB0605	782520861445	Remote Head, Outdoor, 2 Lamp Heads, Wall Mount, 6V, 5W, Black Housing	●				12.6	5
OCRDW0605	OCRDW0605	782520861346	Remote Head, Outdoor, 2 Lamp Heads, Wall Mount, 6V, 5W, White Housing	●			●	12.6	5
OCRDZ0605	OCRDZ0605	782520861544	Remote Head, Outdoor, 2 Lamp Heads, Wall Mount, 6V, 5W, Dark Bronze Housing	●		●		12.6	5
OCRSB0605	OCRSB0605	782520861391	Remote Head, Outdoor, 1 Lamp Head, Wall Mount, 6V, 5W, Black Housing	●		●		0.5	10
OCRSW0605	OCRSW0605	782520861292	Remote Head, Outdoor, 1 Lamp Head, Wall Mount, 6V, 5W, White Housing	●	●	●		0.125	10
OCRSZ0605	OCRSZ0605	782520861490	Remote Head, Outdoor, 1 Lamp Head, Wall Mount, 6V, 5W, Dark Bronze Housing	●		●		2.2	10

OMS

Outdoor aluminum spot with sealed lamp and swivel assembly.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
OMSDB1208	OMSDB1208	782520856953	Remote Head, Outdoor, 2 Lamp Heads, Wall Mount, 12V, 8W, Black Housing				●	1	1
OMSSB0605	OMSSB0605	782520856601	Remote Head, Outdoor, 1 Lamp Head, Wall Mount, 6V, 5.4W, Black Housing	●		●	●	11.46	1
OMSSB0607	OMSSB0607	782520856618	Remote Head, Outdoor, 1 Lamp Head, Wall Mount, 6V, 7.2W, Black Housing	●				19.4	1

Replacement Battery

Dual-Lite approved, valve regulated, replacement batteries. Only batteries approved by Dual-Lite are authorized for use with Dual-Lite products.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
0120255	0120255	782520830519	Replacement Batteries, 6V, 4 - 4.5Ah, Black Housing, Sealed Lead Acid Battery		●	●		1.54	1
0120705	0120705	782520847340	Replacement Batteries, 4V, 8.0Ah, Black Housing, Pure Lead Battery		●	●		2.04	1
0120707	0120707	782520843700	Replacement Batteries, 6V, 8.0Ah, Black Housing, Pure Lead Battery	●	●			3.04	1
0120770	0120770	782520851552	Replacement Batteries, 4V, 5.0Ah, Black Housing, Pure Lead Battery		●	●		1.44	1
0120793	0120793	782520849191	Replacement Batteries, 6V, 5.0Ah, Black Housing, Pure Lead Battery			●		2.14	1
0120800	0120800	782520849207	Replacement Batteries, 6V, 10-12Ah, Black Housing, Sealed Lead Acid Battery	●	●	●		4.14	1
0120803	0120803	782520854492	Replacement Batteries, 12V, 7.2Ah, Black Housing, Sealed Lead Acid Battery	●	●	●		4.60	1
0120822	0120822	782520851460	Replacement Batteries, 2.4V, 60mAh, White Housing, Nickel Cadmium Battery	●	●	●		0.10	1
0120824	0120824	782520854560	Replacement Batteries, 6V, 7 - 7.2Ah, Black Housing, Sealed Lead Acid Battery	●	●	●		2.69	1
0120894	0120894	782520851408	Replacement Batteries, 4.8V, 600mAh, 600mAh, White Housing, Nickel Cadmium Battery	●	●	●		0.16	1
0120922	0120922	782520854850	Replacement Batteries, 6V, 3.0Ah, Black Housing, Sealed Lead Acid Battery	●	●	●		1.30	1
012089401	012089401	782520851415	Replacement Batteries, 4.8V, White Housing, Nickel Cadmium Battery		●	●		0.18	1
0120704	0120704	782520852696	Replacement Batteries, 4V, 5.0Ah, Black Housing, Pure Lead Battery			●		1.42	1
0120706	0120706	782520830564	Replacement Batteries, 6V, 5.0Ah, Black Housing, Pure Lead Battery		●	●		2.18	1
0120708	0120708	782520836306	Replacement Batteries, 6V, 2.5Ah, Black Housing, Pure Lead Battery		●	●		1.14	1
93011385	93011385	782520862268	Replacement Batteries, 8.4V, 2.5Ah, White Housing, Nickel Cadmium Battery			●		1.08	1
93035262	93035262	782520869434	Replacement Batteries, 2.4V, 1.5Ah, to 70oC, White Housing, Nickel Metal Hydride Battery	●				0.12	1
93043816	93043816	782520869441	Replacement Batteries, 2.4V, 1.3Ah, White Housing, Nickel Metal Hydride Battery		●	●		0.12	1
93043817	93043817	782520869458	Replacement Batteries, 2.4V, 1.3Ah, to 70oC, White Housing, Nickel Metal Hydride Battery			●		0.12	1
93015994	93015994	782520869427	Replacement Batteries, 4.8V, 600mAh, White Housing, Nickel Cadmium Battery			●		0.16	1
9304679801	9304679801	782520871673	Replacement Batteries, 12.8V, 1.0Ah, Blue Housing, Lithium Iron Phosphate Battery	●				0.44	1
93072183	93072183	782520868963	Replacement Batteries, 12V, 7.5Ah, Black Housing, Sealed Lead Acid Battery	●		●		8.7	1
93072184	93072184	782520868970	Replacement Batteries, 12V, 7.0Ah, Yellow Housing, Nickel Cadmium Battery	●		●		3.5	1
93072185	93072185	782520868987	Replacement Batteries, 12V, 4.0Ah, Yellow Housing, Nickel Cadmium Battery	●		●		3.5	1
93068301	BAT-LEAD ACID 12V12AH T2	782520868239	Replacement Batteries, 12V, 12Ah, Black Housing, Sealed Lead Acid Battery	●		●		8.7	1

Dual-Lite Accessories

Dual-Lite approved, valve regulated, pure lead (PL) battery, 4V, 5Ah capacity,2.75A @ 4V for 90 minutes to an end voltage of 3.5V. Only batteries approved by Dual-Lite are authorized for use with Dual-Lite products.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
40G	40G	782520161101	Wire Guard, Gray Housing		●			0	1
41G	41G	782520161125	Wire Guard, Gray Housing		●			0	1
F-WC	F-WC	782520834425	Wire Bundle, 6W, Gray Housing	●				1.5	1
PMLXW	PMLXW	782520837884	Mounting Kit, White Housing		●			9.5	1
URK	URK	782520843267	Mounting Kit, Gray Housing	●		●	●	5.66	1
VRS	VRS	782520171407	Clear Housing	●			●	5.15	1
VRS3	VRS3	782520846657	Clear Housing	●	●			6	1
93066388	WGA1	782520868130	Wire Guard	●	●			0.185	1
93066389	WGA2	782520868147	Wire Guard	●	●			0.047	1
93066390	WGA3	782520868154	Wire Guard		●		●	0.047	1
WGEL	WGEL	782520572938	Remote Head, Gray Housing	●	●			0.047	1
WGLX	WGLX	782520837785	Gray Housing	●	●	●	●	0.812	1
WGLXC	WGLXC	782520837792	Exit, Wire Guard, Gray Housing		●			1.351	1
WGLXE	WGLXE	782520837808	Exit, Wire Guard, Gray Housing		●			0.812	1
WGLZ	WGLZ	782520837778	Wire Guard, Gray Housing	●	●			0.812	1
WG-MLT	WG-MLT	782520161156	Exit, Wire Guard, Gray Housing		●			1.351	1
WGTCE	WGTCE	782520572952	LED, Gray Housing	●	●			0.882	1
WGTW	WGTW	782520572945	LED, Gray Housing		●			0.882	1
S6WG	S6WG	782520161132	Remote Head, Gray Housing		●			23.15	1

CE/CA Series

The CE Series Emergency Exit offers energy efficient LED's to illuminate the single or double-face Exit panels. Featuring bright EXIT panel illumination, long-life Nickel Cadmium battery, and optional remote capacity.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93104742	CARG	782520871598	LED Exit and Emergency, Red or Green, Dual Face, Wall, Ceiling Mount, 120V, 277V, White; Black Housing, Nickel Cadmium Battery	●	●			2	6
93104743	CARGB	782520871604	LED Exit and Emergency, Red or Green, Dual Face, Wall, Ceiling Mount, 120V, 277V, White; Black Housing, Nickel Cadmium Battery	●	●			2	6
93104744	CERG	782520871611	LED Exit and Emergency, Red or Green, Dual Face, Wall, Ceiling Mount, 120V, 277V, White; Black Housing, Nickel Cadmium Battery	●	●			2	6
93104745	CERGB	782520871628	LED Exit and Emergency, Red or Green, Dual Face, Wall, Ceiling Mount, 120V, 277V, White; Black Housing, Nickel Cadmium Battery	●	●			2	6
93081858	CAG	856143002216	LED Exit and Emergency, Green, Dual Face, Wall, Ceiling Mount, 120V, 277V, White; Black Housing, Nickel Cadmium Battery	●	●			2	6
93081860	CAGB	856143002230	LED Exit and Emergency, Green, Dual Face, Wall, Ceiling Mount, 120V, 277V, White; Black Housing, Nickel Cadmium Battery	●	●			2	6
93081857	CAR	856143002209	LED Exit and Emergency, Green, Dual Face, Wall, Ceiling Mount, 120V, 277V, White; Black Housing, Nickel Cadmium Battery	●	●	●		2	6
93081859	CARB	856143002223	LED Exit and Emergency, Green, Dual Face, Wall, Ceiling Mount, 120V, 277V, White; Black Housing, Nickel Cadmium Battery	●	●			2	6
93043114	CEG	856143001455	LED Exit and Emergency, Green, Dual Face, Wall, Ceiling Mount, 120V, 277V, White Housing, Nickel Cadmium Battery	●	●		●	2	6
93053082	CEGB	782520867133	LED Exit and Emergency, Green, Dual Face, Wall, Ceiling Mount, 120V, 277V, Black Housing, Nickel Cadmium Battery	●	●			2	6
93043117	CEGRC	856143001479	LED Exit and Emergency, Green, Dual Face, Wall, Ceiling Mount, 120V, 277V, White Housing, Nickel Cadmium Battery	●	●			2	6
93091664	CEGSD	856143002421	LED Exit and Emergency, Green, Dual Face, Wall, Ceiling Mount, 120V, 277V, White Housing, Nickel Cadmium Battery	●	●			2	6
93043113	CER	856143001448	LED Exit and Emergency, Red, Dual Face, Wall, Ceiling Mount, 120V, 277V, White Housing, Nickel Cadmium Battery	●	●	●	●	2	6
93053081	CERB	782520867126	LED Exit and Emergency, Red, Dual Face, Wall, Ceiling Mount, 120V, 277V, Black Housing, Nickel Cadmium Battery	●	●		●	2	6
93043116	CERRC	856143001462	LED Exit and Emergency, Red, Dual Face, Wall, Ceiling Mount, 120V, 277V, White Housing, Nickel Cadmium Battery	●	●	●	●	2	6
93053083	CERRCB	782520867140	LED Exit and Emergency, Red, Dual Face, Wall, Ceiling Mount, 120V, 277V, Black Housing, Nickel Cadmium Battery		●			2	6
93091663	CERSD	856143002414	LED Exit and Emergency, Green, Dual Face, Wall, Ceiling Mount, 120V, 277V, White Housing, Nickel Cadmium Battery	●	●	●	●	2	6

CC Series

The CC Series LED combination exit/emergency light utilizes energy efficient LEDs and features fully adjustable LED lamp-heads and bright EXIT panel illumination, long-life Nickel Cadmium battery and optional remote capacity. UL 924, NFPA 101, NFPA 70, OSHA, CEC T20, Damp Location.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93104746	CCRG	782520871635	Selectable Red or Green Letters, White Housing, Single/Double Face	●	●			2.5 lbs	6
93104747	CCRGB	782520871642	Selectable Red or Green Letters, Black Housing, Single/Double Face	●	●			2.5 lbs	6
93104748	CCRGRC	782520871659	Selectable Red or Green Letters, White Housing, Single/Double Face	●	●			2.5 lbs	6
93104749	CCRGRCB	782520871666	Selectable Red or Green Letters, Black HousingSingle/Double Face, Remote Capacity	●	●			2.5 lbs	6
93043109	CCR	856143001400	Red Letters, White Housing Single/Double Face	●	●	●	●	2.5 lbs	6
93053078	CCRB	782520867096	Red Letters, Black Housing Single/Double Face	●	●			2.5 lbs	6
93043110	CCG	856143001417	Green Letters, White Housing Single/Double Face	●	●			2.5 lbs	6
93053079	CCGB	782520867102	Green Letters, Black Housing Single/Double Face	●	●			2.5 lbs	6
93043111	CCRRC	856143001424	Red Letters,White Housing Single/Double Face, Remote Capacity	●	●	●	●	2.5 lbs	6
93053080	CCRRCB	782520867119	Red Letters, Black Housing Single/Double Face, Remote Capacity	●	●			2.5 lbs	6
93043112	CCGRC	856143001431	Green Letters, White Housing Single/Double Face, Remote Capacity	●	●			2.5 lbs	6
93091661	CCRSD	856143002391	Red Letters, White Housing, Single/Double Face, Self-Test/Self-Diagnostics	●	●	●		2.5 lbs	6
93091662	CCGSD	856143002407	Green Letters, White Housing, Single/Double Face, Self-Test/Self-Diagnostics	●	●	●		2.5 lbs	6
93091659	CCRRCSD	856143002377	Red Letters, White Housing, Single/Double Face, Self-Test/Self-Diagnostics	●	●	●		2.5 lbs	6
93091660	CCGRCSD	856143002384	Green Letters, White Housing, Single/Double Face, Self-Test/Self-Diagnostics	●	●	●		2.5 lbs	6

CCSQ Series

The white Exit housing and lamp-heads are made of high impact UL flame rated thermoplastic. The square LED lamp-heads are fully adjustable and glare-free. Snap together design for quick and easy installation with option of wall or ceiling mount. Nickel Cadmium Battery, UL 924, NFPA 101, NFPA 70, Damp Location, OSHA.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93081856	CCGHOSQ	856143002193	LED Exit and Emergency, Green, Single Face, 2 Lamp Heads, Wall, Ceiling Mount, 120V, 277V, 1.7W, white Housing	●	●			2.5	6
93081855	CCRHOSQ	856143002186	LED Exit and Emergency, Red, Single Face, 2 Lamp Heads, Wall, Ceiling Mount, 120V, 277V, 1.7W, white Housing	●	●	●	●	2.5	6

CCE Series

The CCE Series offers quality and value with a compact and attractive thin die-cast aluminum exit sign. Nickel Cadmium Battery, City of Chicago, NFPA 101, UL924.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93047793	CCEDG	856143001752	LED Exit and Emergency, Red, Dual Face, Surface, Recessed Ceiling, Recessed Wall Mount, 120V, 277V, 4.3W, 4.7W, 4.5W, 4.9W, Black Housing	●				2.8	8
93047789	CCEDGE	856143001714	LED Exit and Emergency, Red, Dual Face, Surface, Recessed Ceiling, Recessed Wall Mount, 120V, 277V, 4.3W, 4.7W, 4.5W, 4.9W, Black Housing	●				2.8	8
93047791	CCEDR	856143001738	LED Exit and Emergency, Red, Dual Face, Surface, Recessed Ceiling, Recessed Wall Mount, 120V, 277V, 4.3W, 4.7W, 4.5W, 4.9W, black Housing		●		●	2.8	8
93047787	CCEDRE	856143001691	LED Exit and Emergency, Red, Dual Face, Surface, Recessed Ceiling, Recessed Wall Mount, 120V, 277V, 4.3W, 4.7W, 4.5W, 4.9W, Black Housing	●	●			2.8	8
93047792	CCESG	856143001745	LED Exit and Emergency, Red, Dual Face, Surface, Recessed Ceiling, Recessed Wall Mount, 120V, 277V, 4.3W, 4.7W, 4.5W, 4.9W, Black Housing	●				2.8	8
93047788	CCESGE	856143001707	LED Exit and Emergency, Red, Dual Face, Surface, Recessed Ceiling, Recessed Wall Mount, 120V, 277V, 4.3W, 4.7W, 4.5W, 4.9W, Black Housing	●				2.8	8
93047790	CCESR	856143001721	LED Exit and Emergency, Red, Dual Face, Surface, Recessed Ceiling, Recessed Wall Mount, 120V, 277V, 4.3W, 4.7W, 4.5W, 4.9W, Black Housing	●	●			2.8	8
93047786	CCESRE	856143001684	LED Exit and Emergency, Red, Dual Face, Surface, Recessed Ceiling, Recessed Wall Mount, 120V, 277V, 4.3W, 4.7W, 4.5W, 4.9W, Black Housing	●	●			2.8	8

CWC Series

Wet Location Combination Exit/Emergency Light. Remote Capability, Nickel Cadmium Battery, UL 924, NFPA 101, NFPA 70, Wet Location.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93063666	CWC1GW	856143001851	LED Exit and Emergency, Green, Dual Face, 2 Lamp Heads, Ceiling, End Mount, 120V, 277V, 5.2W, 5.2W, white Housing,	●	●			8	4
93063670	CWC1GW-CT	856143001899	LED Exit and Emergency, Green, Dual Face, 2 Lamp Heads, Ceiling, End Mount, 120V, 277V, 5.2W, 5.2W, white Housing	●				8	4
93063664	CWC1RW	856143001837	LED Exit and Emergency, Red, Dual Face, 2 Lamp Heads, Ceiling, End Mount, 120V, 277V, 5.2W, 5.2W, white Housing	●	●			8	4
93063668	CWC1RW-CT	856143001875	LED Exit and Emergency, Red, Dual Face, 2 Lamp Heads, Ceiling, End Mount, 120V, 277V, 5.2W, 5.2W, white Housing	●	●			8	4
93063667	CWC2GW	856143001868	LED Exit and Emergency, Green, Dual Face, 2 Lamp Heads, Ceiling, End Mount, 120V, 277V, 5.2W, 5.1W, white Housing	●				8	4
93063671	CWC2GW-CT	856143001905	LED Exit and Emergency, Green, Dual Face, 2 Lamp Heads, Ceiling, End Mount, 120V, 277V, 5.2W, 5.1W, white Housing	●				8	4
93063665	CWC2RW	856143001844	LED Exit and Emergency, Red, Dual Face, 2 Lamp Heads, Ceiling, End Mount, 120V, 277V, 5.2W, 5.1W, white Housing		●			8	4
93063669	CWC2RW-CT	856143001882	LED Exit and Emergency, Red, Dual Face, 2 Lamp Heads, Ceiling, End Mount, 120V, 277V, 5.2W, 5.1W, white Housing		●			8	4

CEL Series

The CEL Series offers Edge-Lit LED architectural exit signs featuring modern styling, easy installation and energy-saving, long-life LED lamps. Models are available in surface mount and recessed ceiling, wall or end mounting. Nickel Cadmium Battery, UL924, NFPA 101, NFPA 70

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93070936	CELR1GN	856143002278	LED Exit and Emergency, Green, Single Face, Surface, Recessed Ceiling, Recessed Wall Mount, 120V, 277V, 3.72W, Silver Housing	●				6.25	3
93043123	CELR1GNE	856143001592	LED Exit and Emergency, Green, Single Face, Surface, Recessed Ceiling, Recessed Wall Mount, 120V, 277V, 3.72W, Silver Housing	●			●	12.5	3
93070934	CELR1RN	856143002254	LED Exit and Emergency, Red, Single Face, Surface, Recessed Ceiling, Recessed Wall Mount, 120V, 277V, 3.72W, Silver Housing	●	●			6.25	6
93043122	CELR1RNE	856143001585	LED Exit and Emergency, Red, Single Face, Surface, Recessed Ceiling, Recessed Wall Mount, 120V, 277V, 3.72W, Silver Housing	●	●		●	0.15	3
93043125	CELR2GNE	856143001615	LED Exit and Emergency, Green, Single Face, Surface, Recessed Ceiling, Recessed Wall Mount, 120V, 277V, 3.72W, Silver Housing	●	●			0.41	3
93043124	CELR2RNE	856143001608	LED Exit and Emergency, Red, Single Face, Surface, Recessed Ceiling, Recessed Wall Mount, 120V, 277V, 3.72W, Silver Housing	●	●		●	0.31	6
93091653	CELS1GN	856143002315	LED Exit and Emergency, Green, Single Face, Surface, Recessed Ceiling, Recessed Wall Mount, 120V, 277V, 3.72W, Silver Housing	●				0.32	6
93043119	CELS1GNE	856143001554	LED Exit and Emergency, Green, Single Face, Surface, Recessed Ceiling, Recessed Wall Mount, 120V, 277V, 3.72W, Silver Housing	●			●	0.41	6
93043118	CELS1RNE	856143001547	LED Exit and Emergency, Red, Single Face, Surface, Recessed Ceiling, Recessed Wall Mount, 120V, 277V, 3.72W, Silver Housing	●	●		●	0.392	6
93091654	CELS2GN	856143002322	LED Exit and Emergency, Green, Single Face, Surface, Recessed Ceiling, Recessed Wall Mount, 120V, 277V, 3.72W, Silver Housing	●				0.36	8
93043121	CELS2GNE	856143001578	LED Exit and Emergency, Green, Single Face, Surface, Recessed Ceiling, Recessed Wall Mount, 120V, 277V, 3.72W, Silver Housing	●				0.45	3
93070939	CELS2RN	856143002308	LED Exit and Emergency, Red, Single Face, Surface, Recessed Ceiling, Recessed Wall Mount, 120V, 277V, 3.72W, Silver Housing	●	●			0.53	3
93043120	CELS2RNE	856143001561	LED Exit and Emergency, Red, Single Face, Surface, Recessed Ceiling, Recessed Wall Mount, 120V, 277V, 3.72W, Silver Housing	●	●			0.58	3

CSR

The Compass International Exit offers quality and value with a compact and attractive LED based emergency exit. The white housing is made of high impact UL flame rated thermoplastic. Snap together canopy, housing and removable chevrons for quick and easy installation. Universal single or double-face with SALIDA panel. Nickel Cadmium Battery, UL924, NFPA 101, NFPA 70, OSHA.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93058261	CSREIV	856143001790	LED Exit and Emergency, Red, Dual Face, Ceiling, Wall Mount, 120V, 277V, 3.8W, White Housing	●	●			2	6
93058260	CSRIV	856143001783	LED Exit and Emergency, Red, Dual Face, Ceiling, Wall Mount, 120V, 220-240V, 3.8W, White Housing		●			2	6

CEW Series

The CEW Series offers quality and value with a wet location rated emergency Exit sign. Nickel Cadmium Battery, UL924, NFPA 101, NFPA 70, OSHA, CEC T20.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93047785	CEWDGE	856143001677	LED Exit and Emergency, Green, Dual Face, Surface, Recessed Mount, 120V, 277V, White Housing	●				1.59	6
93047783	CEWDRE	856143001653	LED Exit and Emergency, Red, Dual Face, Surface, Recessed Mount, 120V, 277V, White Housing	●	●	●		14.25	6
93047784	CEWSGE	856143001660	LED Exit and Emergency, Green, Dual Face, Surface, Recessed Mount, 120V, 277V, White Housing	●				0.23	6
93047782	CEWSRE	856143001646	LED Exit and Emergency, Red, Dual Face, Surface, Recessed Mount, 120V, 277V, White Housing		●	●	●	0.23	6

RME Series

International Running Man Symbol.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93069595	RMEUW	856143001998	LED Exit and Emergency, Green, Single Face, Wall, Ceiling Mount, 120-347V, 1.4W, White Housing		●			6	1
93069596	RMEUWE	856143002001	LED Exit and Emergency, Green, Single Face, Wall, Ceiling Mount, 120-347V, 1.4W, White Housing		●			6	1
93069597	RMEUWE-SD	856143002018	LED Exit and Emergency, Green, Single Face, Wall, Ceiling Mount, 120-347V, 1.2W, White Housing		●			6	1

CS Series

The CS Series is an Exit sign made of highly durable aluminum with long-life LED's which provide bright and even EXIT illumination. Also available with the Dynamic Symbol of Accessibility which is required for some State building codes.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93099152	CSAUDG	856143002469	Dynamic Accessibility Symbol, Green, 120V, 277V, White Housing				●	6.1	6
93099151	CSAUDR	856143002452	Dynamic Accessibility Symbol, Red, 120V, 277V, White Housing, Nickel Metal Hydride Battery				●	6.1	6
93099156	CSAUEG	856143002506	Exit, Green, 120V, 277V, White Housing				●	6.1	6
93099155	CSAUER	856143002490	Exit, Red, 120V, 277V, White Housing, Nickel Metal Hydride Battery				●	6.1	6
93099154	CSEUDG	856143002483	Dynamic Accessibility Symbol, Green, 120V, 277V, White Housing, Nickel Metal Hydride Battery				●	6.1	6
93099153	CSEUDR	856143002476	Dynamic Accessibility Symbol, Red, Dual Face, 2 Lamp Heads, Ceiling Mount, 120V, 277V, White Housing				●	6.1	6
93099158	CSEUEG	856143002520	Exit, Green, 120V, 277V, White Housing, Nickel Metal Hydride Battery				●	6.1	6
93099157	CSEUER	856143002513	Exit, Red, 120V, 277V, White Housing				●	6.1	6

CELC Series

- Combination Exit/Emergency Light
- 120-277VAC
- UL924 Damp Location Listed

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93116092	CELCR1RN	782520871710	Recessed mounting, Single Face, Red Letters, Brushed Aluminum	●	●			7 lbs.	4
93116093	CELCR2RN	782520871727	Recessed mounting, Double Face, Red Letters, Brushed Aluminum	●	●			7 lbs.	4
93116094	CELCR1GN	782520871734	Recessed mounting, Single Face, Green Letters, Brushed Aluminum	●	●			7 lbs.	4
93116095	CELCR2GN	782520871741	Recessed mounting, Double Face, Green Letters, Brushed Aluminum	●	●			7 lbs.	4
93116096	CELCS1RN	782520871758	Surface mounting, Single Face, Red Letters, Brushed Aluminum	●	●			7 lbs.	4
93116097	CELCS2RN	782520871765	Surface mounting, Double Face, Red Letters, Brushed Aluminum	●	●			7 lbs.	4
93116098	CELCS1GN	782520871772	Surface mounting, Single Face, Green Letters, Brushed Aluminum	●	●			7 lbs.	4
93116099	CELCS2GN	782520871789	Surface mounting, Double Face, Green Letters, Brushed Aluminum	●	●			7 lbs.	4

CELEM Series

- Emergency Light
- 120-277VAC
- Matching CELC Combo
- UL924 Damp Location Listed

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93116100	CELEM	782520871796	Double Lamp Recessed mounting Emergency light	●	●			3 lbs	6
93116101	CELEMHO	782520871802	Double lamp Recessed mounting Emergency light, 400 lms	●	●			3 lbs	6

CPL25 Series

- LED Battery Pack
- 25 Watt, 120/277VAC Output
- Full Lumen Output

Part Number	Catalog Number	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Wt. each	Ctn. Qty
93104398	CPL25	782520871703	Powers up to 25 Watts of LED Luminaires with Full Lumen Output	●	●	●	●	7.7 lbs.	1

CU2HL Series

- Emergency Light
- 120-277VAC
- High Lumen Output
- UL924 Damp Location Listed

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93130907	CU2HL	840141417806	White housing, 2.7W LED lamps, 550 lumens	●	●		●	2.6 Lbs.	6 Ea.
93130908	CU2HLSD	840141417813	White housing, 2.7W LED lamps, 550 lumens, Self Diagnostics	●	●		●	2.6 Lbs.	6 Ea.
93130909	CU2HLHO	840141417820	White housing, 5.4W LED lamps, 1300 lumens	●	●		●	2.6 Lbs.	6 Ea.
93130910	CU2HLHOSD	840141417837	White housing, 5.4W LED lamps, 1300 lumens, Self Diagnostics	●	●		●	2.6 Lbs.	6 Ea.
93130911	CU2HLB	840141417844	Black housing, 2.7W LED lamps, 550 lumens	●	●		●	2.6 Lbs.	6 Ea.
93130912	CU2HLSDB	840141417851	Black housing, 2.7W LED lamps, 550 lumens, Self Diagnostics	●	●		●	2.6 Lbs.	6 Ea.
93130913	CU2HLHOB	840141417868	Black housing, 5.4W LED lamps, 1300 lumens	●	●		●	2.6 Lbs.	6 Ea.
93130914	CU2HLHOSDB	840141417875	Black housing, 5.4W LED lamps, 1300 lumens, Self Diagnostics	●	●		●	2.6 Lbs.	6 Ea.

CUSO Series

The CUSO Series is an architectural, low-profile outdoor light, offering "normally on" AC and emergency lighting with powerful LED illumination. Nickel Cadmium Battery, UL 924, NFPA 101, NFPA 70, OSHA, Wet Location.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93073368	CUSO BK	856143002100	LED Emergency Light, 1600 LMS, Wall Mount, 120V, 277V, 17W, Black Housing	●	●			4.5	6
93073369	CUSO BK-H	856143002117	LED Emergency Light, 1600 LMS, Wall Mount, 120V, 277V, 17W, Black Housing	●				4.5	6
93073366	CUSO DB	856143002087	LED Emergency Light, 1600 LMS, Wall Mount, 120V, 277V, 17W, Dark Bronze Housing	●	●		●	4.5	6
93073367	CUSO DB-H	856143002094	LED Emergency Light, 1600 LMS, Wall Mount, 120V, 277V, 17W, Dark Bronze Housing	●	●		●	4.5	6
93073370	CUSO WH	856143002124	LED Emergency Light, 1600 LMS, Wall Mount, 120V, 277V, 17W, White Housing	●	●			4.5	6
93073371	CUSO WH-H	856143002131	LED Emergency Light, 1600 LMS, Wall Mount, 120V, 277V, 17W, White Housing	●				4.5	6
93080035	CUSO4BK-H-ND	782520869373	LED Emergency Light, 1600 LMS, Wall Mount, 120V, 277V, 17W, Black Housing	●	●			4.5	6
93080034	CUSO4BK-ND	782520869366	LED Emergency Light, 1600 LMS, Wall Mount, 120V, 277V, 17W, Black Housing	●	●			4.5	6
93080033	CUSO4DB-H-ND	782520869359	LED Emergency Light, 1600 LMS, Wall Mount, 120V, 277V, 17W, Dark Bronze Housing	●	●			4.5	6
93080032	CUSO4DB-ND	782520869342	LED Emergency Light, 1600 LMS, Wall Mount, 120V, 277V, 17W, Dark Bronze Housing	●	●			4.5	6
93080037	CUSO4WH-H-ND	782520869397	LED Emergency Light, 1600 LMS, Wall Mount, 120V, 277V, 17W, White Housing	●	●			4.5	6
93080036	CUSO4WH-ND	782520869380	LED Emergency Light, 1600 LMS, Wall Mount, 120V, 277V, 17W, White Housing	●	●			4.5	6

CU2 Series

LED emergency light with fully adjustable lamp-heads, long-life Nickel Cadmium battery, energy efficient LED's and optional remote capacity.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93043107	CU2	856143001486	LED Emergency, 2 Lamp Heads, 120V, 277V, 1W, White Housing, NiCad Battery, UL 924, NFPA 101, NFPA 70, OSHA, CEC T20	●	●	●	●	1	12
93053076	CU2B	782520867072	LED Emergency, 2 Lamp Heads, 120V, 277V, 1W, Black Housing, NiCad Battery, UL 924, NFPA 101, NFPA 70, OSHA, CEC T20	●	●		●	1	12
93043108	CU2RC	856143001493	LED Emergency, 2 Lamp Heads, 120V, 277V, 1W, White Housing, NiMh Battery, UL 924, NFPA 101, NFPA 70, OSHA, CEC T20	●	●	●	●	1	12
93053077	CU2RCB	782520867089	LED Emergency, 2 Lamp Heads, 120V, 277V, 1W, Black Housing, NiMh Battery, UL 924, NFPA 101, NFPA 70, OSHA, CEC T20	●	●		●	1	12
93091658	CU2RCSD	856143002360	LED Emergency, 2 Lamp Heads, 120V, 277V, 1W, White Housing, NiCad Battery, UL 924, NFPA 101, NFPA 70, OSHA, CEC T20	●	●	●	●	1	12
93091657	CU2SD	856143002353	LED Emergency, 2 Lamp Heads, 120V, 277V, 1W, White Housing, Nickel Cadmium Battery, UL 924, NFPA 101, NFPA 70, OSHA, CEC T20	●	●	●	●	1	12

CU2SQ Series

The CU2SQ Series offers quality and value with a compact and attractive LED based emergency light. The white or black housing and lamp-heads are made of high impact UL flame rated thermoplastic. The square LED lamp-heads are fully adjustable and glare-free. Nickel Cadmium Battery, UL 924, NFPA 101, NFPA 70, OSHA.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93081854	CU2RCSQ	856143002179	LED Emergency Light, 2 Lamp Heads, Wall Mount, 120V, 277V, 1.6W, White Housing, Remote Capability	●				1	12
93091666	CU2RCSQSD	856143002445	LED Emergency Light, 2 Lamp Heads, Wall Mount, 120V, 277V, 1.6W, White Housing, Remote Capability	●	●	●	●	1	12
93081852	CU2SQ	856143002155	LED Emergency Light, 2 Lamp Heads, Wall Mount, 120V, 277V, 1.6W, White Housing	●	●	●	●	1	12
93081853	CU2SQB	856143002162	LED Emergency Light, 2 Lamp Heads, Wall Mount, 120V, 277V, 1.6W, Black Housing		●			1	12
93091665	CU2SQSD	856143002438	LED Emergency Light, 2 Lamp Heads, Wall Mount, 120V, 277V, 1.6W, White Housing	●	●	●	●	1	12

CU2SO Series

Shielded Outdoor LED emergency light wall or ceiling mount, Nickel Cadmium battery, energy efficient LED's. Nickel Cadmium Battery, UL 924, NFPA 101, NFPA 70, OSHA.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93091655	CU2SO	856143002339	LED Emergency Light, 2 Lamp Heads, Wall Mount, 120V, 277V, 3.48W, White Housing	●	●	●	●	3	12

CSWEU2LED

Outdoor LED emergency light with fully gasketed polycarbonate shield. Nickel Cadmium Battery, UL 924, UL Wet Location, CEC T20.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93081861	CSWEU2LED	856143002247	LED Emergency Light, 2 Lamp Heads, Wall Mount, 120V, 277V, 2.3W, White Housing	●	●	●	●	2.5	6

CUW Series

Decorative LED AC/emergency light. UL 924, NFPA 101, NFPA 70, UL Damp location, OSHA.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93063366	CUWZ-HTR-PC	856143001820	LED Emergency Light, 1 Lamp Head, 1280 LMS, Wall Mount, 120V, 277V, 9W, 8W, Dark Bronze Housing	●	●			4	6
93063364	CUWZ-PC	856143001806	LED Emergency Light, 1 Lamp Head, 1280 LMS, Wall Mount, 120V, 277V, 9W, 8W, Dark Bronze Housing	●	●			4	6

CU2W Series

Emergency lighting fixture combining LED performance and value with a compact and attractive wet location LED based emergency light. Nickel Cadmium Battery, UL 924, NFPA 101, NFPA 70, OSHA.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93047780	CU2WG	856143001622	LED Emergency Light, 2 Lamp Heads, Wall Mount, 120V, 277V, 3.75W, Gray Housing		●	●	●	7.5	4
93047781	CU2WB	856143001639	LED Emergency Light, 2 Lamp Heads, Wall Mount, 120V, 277V, 3.75W, Black Housing		●			0.31	12

CWR Series

Emergency lighting fixture combining LED performance and value with a compact and attractive wet location LED based emergency light.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93048688	CWRD	856143001769	LED Emergency Remote, 2 Lamp Heads, Wall, Ceiling Mount, 120V, 277V, 9.6W, Gray Housing		●	●		3	12
93048687	CWRS	856143001776	LED Emergency Remote, 1 Lamp Head, Wall, Ceiling Mount, 120V, 277V, 9.6W, Gray Housing	●	●			2	12

CIR Series

The CIR Series LED Indoor Remote offers energy efficient LEDs in an attractive and compact integrated single or double-head remote. Lamp-heads are fully adjustable and glare-free.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93043127	CIRD	856143001516	Remote Head, Indoor, 2 Lamp Heads, Wall, Ceiling Mount, 3V, 1W, White Housing, Damp listed		●	●	●	1.2	10
93043126	CIRS	856143001509	Remote Head, Indoor, 1 Lamp Head, Wall Mount, 3V, 1W, White Housing, Damp listed			●	●	1	20

COR Series

The COR Series LED Outdoor Remote offers energy efficient LEDs in an attractive single or double-head remote. Lamp-heads are fully adjustable and gasketed for outdoor operation.

Part #	Catalog #	UPC Code	Description	CA 03	GA 27	IL 06	NJ 12	Lbs. each	Ctn. Qty
93043129	CORD	856143001530	Remote Head, Outdoor, 2 Lamp Heads, Wall Mount, 3V, 1W, White Housing, Damp listed	●	●	●	●	1.2	12
93043128	CORS	856143001523	Remote Head, Outdoor, 1 Lamp Head, Wall Mount, 3V, 1W, White Housing, Damp listed	●	●	●		1	20

Index

12V/120V Landscape Accessories....91
Airo LED and 4" Square Straight Steel....64
Airo LED and 4" Square Straight Steel Pronto Combo (Double)*....64
Airo LED Area/Site*....63
ALF Series....66
ArchiTrak® 4" LED Track Head....49
Architrak® Track System....49
ARX09 - ArcheType® X Site/Area....85
ARX16 - ArcheType® X Site/Area....85
ATSD/ALCR Series....107
AW – Commercial Wrap....22
Cables....54
CBT – Back-Lit Troffer*....17
CCEL Series....115
CCE Series....125
CCL – Center Lens Troffer*....18
CC Series....124
CCSQ Series....124
CCU2....117
CDL- 4", 5" or 6" LED Retrofit Trims....48
CE/CA Series....123
CELC Series....128
CELEM Series....128
CEL Series....126
CEW Series....127
CFP – Edge-Lit Flat Panel*....16
CHB – Linear High Bay*....25
CIR Series....131
CLSC Series....113
CLS Series....113
CNW – Narrow Wrap*....21
Colt....67
Colt LBUL....67
Columbia Lighting Accessories....32
COR Series....131
CPL25 Series....128
CPR....118
CRH....119
CRN – Wet Location High Bay*....28
CRU....117
CRW – Round Wrap*....21
CS – Commercial Striplight....24
CSL – LED Striplight*....24
CSR....126
CS Series....127
CSWEU2LED....130
CTK – LED Troffer Retrofit Kit*....30
CU2HL Series....129
CU2 Series....130
CU2SO Series....130
CU2SQ Series....130
CU2W Series....131
CUC – Undercabinet Light....25
CUSO Series....129
CUW Series....131
CVT — Linear Vaportite*....29
CWC Series....125
CWP – Wrap Luminaire*....22
CWR Series....131
CX Lighting Control Panels....51
D2 Series 2" LED Downlights and Accessories....40
Daylight Harvesting Controls....51
DDL Patrolman....65
DPL Series....111
Dual-Lite Accessories....121
Dynamo DYN Series....101
Dynamo Remote Series....118
ELCR Series....107
Emergency Lighting Units....52
ESL – Escalate™ Stairwell Luminaire*....24
EV4D-02WAL Series....98
EV4R Series....99
EVC Series....108
EVE4X Series....109
EVE Series....108
EVHCR Series....117
EVHC Series....97
EVO Series....118
EVR Series....117
EV Series....98
EVS Series....102
EZ-2 Series....99
Factor Floods....70
Factor - Large....70
Fresno Square or Round Bollard....80
GORK - LED Prismatic Troffer Retrofit Kit*....30
HBL – LED High Bay Series....27
HCX Series....115
Housing Accessories....44
JT8 – Lensed Troffer....20
K4 - KicK™ Small Housing Scale....93
KRS - Round Steel Poles, 4" (Non Tapered)....87
Lampak Battery Packs....106
Lampak Remote Test Switch....106
Large Viper LED Luminaire....95
LAW – Low Profile LED Wraparound*....22
LCAT – LED Contemporary Architectural Troffer*....15
LE Series....116
LES Series....116
LightHAWK® Wall Switch Sensors....56
LightOWL® Dual Technology Ultrasonic and PIR....58
LightPower™ LPS Series....104
LiteBox® 4" LED QuickLink Housings....47
LiteBox® 4" LED Retrofit Trims....48
LiteBox® 6" LED Cylinder....47
LiteBox® 6" LED Housings and Trims....45
LiteBox® 6" LED Retrofit Trims....46
LiteBox® 6" LED Surface Downlights....46
LiteBox® Plus 6" LED Housings and Trims....45
LiteFrame® Commercial LED 4" Housings and Trims....41
LiteFrame® Commercial LED 6" Cylinders....43
LiteFrame® Commercial LED 6" Housings and Trims....42
LiteGear® Series....103
LITEISTRY™ 3" LED Round Housings and Trims....35
LITEISTRY™ 3" LED Square Housings and Trims....35
LITEISTRY™ 4" LED Round Housings and Trims....36
LITEISTRY™ 4" LED Square Housings and Trims....37
LITEISTRY™ 6" LED Round Housings and Trims....38
LITEISTRY™ 6" LED Square Housings and Trims....39
LiteStep® LED Step Lights....49
LJT – LED Troffer*....19
LM Series....100
LNC2 LitePak....72
LNC3 Litepak LED Wallpacks*....73
LNC4 LitePak....73
LNC LitePak....71
LNC Litepak LED Wallpacks....71
Low Profile Passive Infrared Ceiling Sensor....55
LSER – Serrano® LED Architectural Luminaire*....18
LSRK – Linear Strip Retrofit Kit*....31
LTRE – Transition® Enclosed LED Deep Architectural Center Lens*....18
LT Series....109
LXEM – LED Enclosed and Gasketed Luminaire*....29
LXEN – Narrow LED Enclosed and Gasketed Luminaire*....28
LZ Series....99
Marshal....77
Micro Flood®....88
Mini Colt....66
MPS – MultiPurpose Linear*....23
NRG® 4000 LED Lumasquare® Series....75
NRG 300L....77
NX Distributed Intelligence™ Lighting Controls....52
Obsidian™....114
OCR Series....119
OMNI® Low Voltage Dual Technology Occupancy/Vacancy Ceiling Sensors....54
OMS....119
Options and Accessories....82
P4D – High Performance Parabolic....20
PEL – Peloton™ High Performance High Bay*....26
Perimaliter®....78
PG Series....97
Photocontrol....82
Pole Accessories....81
Poles....80
PowerLED PLD Series....107
Power Packs and Controlled Relays....58
Pronto Combo (Single)*....64
PROV/PROL - Providence® Medium/Large Housing Scale....92
PRS Perimashield....78
RATIO - RAR1....63
RATIO - RAR2....63
RATIO - RFL2/RFL3....68
RATIO - RFL4/RFL5....69
Ravenna Highlighter....88
Ravenna Lowlighter....88
Replacement Battery....120
Retroficient LiteFrame Commercial LED 6" Housings and Trims....44
RLA – Recessed LED Architectural*....19
RLW - Revalume™ Linear Wrap*....21
RME Series....127
Round Hood....89
Scarab Series....89
SE Series....110
SEWL Series....112
SGC Sling....75
SGD Sling....65
SG Sling Series....74
Sportslighting Mounting Accessories....83
Sportsliter Series Luminaire....83
Square Hood....89
Synchron DLS Series....105
TCAT – LED Twin Contemporary Architectural Luminaire*....17
The Archetype® LED with PicoEmitter®....86
Traditional....90
UCM/UCL - Universe® Medium/Large Housing Scale....92
UFO Battery Packs....105
UFO Series....106
Vaportite® V Series....76
Vaportites VBGL/ VWGL....76
Viper Small....95
Wallbox Devices....59
WARP9® LED with PicoEmitter®....86
WARP9® LED with PicoPrism®....86
WASP Fixture Sensor....55
Well Light....90
WGH Glass Refractor Wallpack Series....79
WGH Switchable Glass Refractor Wallpack....79
wiSCAPE® Lighting Controls....60

Notes

Notes

HUBBELL Lighting

ARCHITECTURAL AREA LIGHTING

BEACON PRODUCTS

COLUMBIA LIGHTING

COMPASS

DUAL-LITE

HEALTHCARE SOLUTIONS

HUBBELL CONTROL SOLUTIONS

HUBBELL OUTDOOR LIGHTING

KIM LIGHTING

KURT VERSEN

LITECONTROL

PRESCOLITE

701 Millennium Blvd. Greenville, SC 29607
Tel 864.678.1000
www.hubbelllighting.com

HLI-2042 Revised November 2020

Copyright © 2020 Hubbell Lighting, Inc. All rights reserved.
Please refer to online specifications for most up-to-date content as specifications are subject to change without notice.