



Suitable for direct burial, lashed aerial, duct and underground conduit applications

UV resistant jacket

REACH and RoHS compliant

Foil shield to protect against RFI and EMI

ELECTRICAL CHARACTERISTICS

- ◆ **Input Impedance:** 100Ω ± 15Ω (1.0-100MHz)
100Ω ± 20Ω (101-250MHz)
100Ω ± 25Ω (251-500MHz)
- ◆ **Maximum Resistance Unbalance:** 3%
- ◆ **Voltage Rating :** 300V
- ◆ **Max. Capacitance Unbalance:** 330pF/100m
- ◆ **Max. Delay Skew:** 45ns/100m
- ◆ **Nominal Velocity of Propagation (NVP):** 67%

TEMPERATURE RANGE

- **Storage Temp:** -40C to +70C (-40F to +158F)
- **Installation Temp:** -20C to +70C (-4F to +158F)
- **Operation Temp:** -40C to +70C (-40F to +158F)

APPLICATIONS

- ▲ 10GBASE-T Gigabit Ethernet
- ▲ 2.5/5GBASE-T Gigabit Ethernet
- ▲ 1000BASE-T Gigabit Ethernet
- ▲ 1000Mbps ATM
- ▲ 622Mbps ATM
- ▲ 100BASE-T Ethernet
- ▲ Broadband Video
- ▲ IEEE 802.3 POE, POE+, 4PPOE


HUBBELL NEXTSPEED Category 6A OSP Cable



Hubbell Premise Wiring NEXTSPEED® Category 6A OSP (Outside Plant) cables are designed for outdoor applications, typically utilized in aerial, direct burial, or buried in conduit or duct, where building-to-building interconnections must be made. The cable is filled with nonconductive, water-blocking gel and has an updated single jacket construction to reduce the overall diameter and improve installation.

CABLE FEATURES

F/UTP Construction

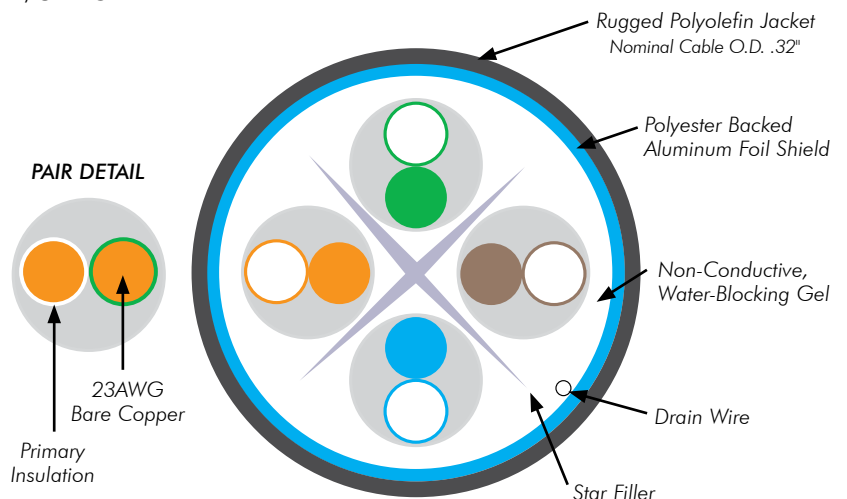

ORDERING INFORMATION

**NEXTSPEED® Category 6A, OSP Outdoor Cable**

Description
1,000ft Spool, Black

Catalog No.
C6ASOPBK

TRANSMISSION SPECIFICATIONS, Worst Case

ANSI/TIA 568.2-D Category 6A Compliant;
ISO/IEC 11801, 2nd ed. Class E_A Compliant

Freq. (MHz)	Insertion Loss (dB/100m)	NEXT (dB/100m)	PSNEXT (dB/100m)	ACR (dB/100m)	PSACR (dB/100m)	ACRF (dB/100m)	PSACRF (dB/100m)	Return Loss (dB/100m)
	Max.	Min.	Min.	Min.	Min.	Min.	Min.	Min.
1	2.1	74.3	72.3	72.2	70.2	67.8	64.8	20
4	3.8	65.3	63.3	61.5	59.5	55.8	52.8	23
8	5.3	60.8	58.8	55.4	53.4	49.7	46.7	24.5
10	5.9	59.3	57.3	53.4	51.4	47.8	44.8	25
16	7.5	56.2	54.2	48.8	46.8	43.7	40.7	25
20	8.4	54.8	52.8	46.4	44.4	41.8	38.8	25
25	9.4	53.3	51.3	44	42	39.8	36.8	24.3
31.25	10.5	51.9	49.9	41.4	39.4	37.9	34.9	23.6
62.5	15	47.4	45.4	32.4	30.4	31.9	28.9	21.5
100	19.1	44.3	42.3	25.2	23.2	27.8	24.8	20.1
155	24.1	41.4	39.4	17.4	15.4	24	21	18.8
200	27.6	39.8	37.8	12.2	10.2	21.8	18.8	18
250	31.1	38.3	36.3	7.3	5.3	19.8	16.8	17.3
300	34.3	37.1	35.1	2.9	0.9	18.3	15.3	16.8
350	37.2	36.1	34.1	–	–	16.9	13.9	16.3
400	40.1	35.3	33.3	–	–	15.8	12.8	15.9
500	45.3	33.8	31.8	–	–	13.8	10.8	15.2

HUBBELL®
Premise Wiring

hubbell.com/hubbellpremisewiring



Hubbell Premise Wiring • Hubbell Incorporated (Delaware) • 23 Clara Drive • Suite 103 • Mystic, CT 06355 • Phone (800) 626-0005 • FAX (860) 535-8328
Printed in U.S.A. Specifications subject to change without notice.

® is a registered trademark of Hubbell Incorporated.

PLSSCAC004 7/21