

thermOweld® provides high quality products to the Electric, Utility, Telecom, Cathodic, and Rail Markets.

**CONTACT-GF** is an economical solution for areas with very difficult grounding issues.

**CONTACT-GF** is highly conductive in a wet or dry applications and does not require moisture to lower the resistance of your grounding system.


**CONTACT-GF** contains a corrosion inhibitor which forms a film on copper creating a barrier against corrosion.

**CONTACT-GF** can be poured in dry or pumped in slurry form. No tamping required. It is very contractor friendly.


## Features

- EZ to install.
- Electrically Conductive.
- Environmentally Friendly.
- Will not leech into the ground.
- Positive low resistance, electrical connection to earth.
- Does not contain any hazardous chemicals.
- Compatible with all copper grounding systems.
- Contains a corrosion inhibitor to protect copper.
- Will not expand or shrink.
- Not affected by freezing.
- Excellent shelf life.
- Typical resistivity <10 Ohm-cm.

### VERTICAL INSTALLATION

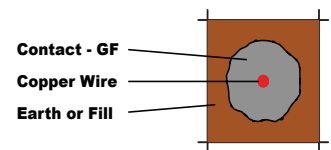

### HORIZONTAL CONSTRUCTION/GRID CONSTRUCTION

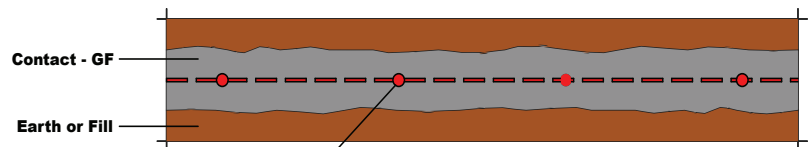

# thermOweld®

800.558.1373