

thermOweld® provides high quality products to the Electric, Utility, Telecom, Cathodic, and Rail Markets.

Certain applications require a permanent hardening grounding material.

**CONTACT-GS** is compatible with all standard copper grounding systems. It is an economical solution to difficult grounding issues in hard to deal with areas.

**CONTACT-GS** is manufactured from environmentally safe material and is extremely stable when mixed with water or exposed to moisture.


**CONTACT-GS** contains the hardening characteristics of cement while retaining its highly conductive properties.

**CONTACT-GS** will remain highly conductive during a drought or when exposed to extremely low temperatures. Since **CONTACT-GS** does not have any shrinkage or expansion properties it will remain in contact with the earth.


## Features

- EZ to install.
- Electrically Conductive.
- Environmentally Friendly.
- Will not leech into the ground.
- Positive low resistance, electrical connection to earth.
- Does not contain any hazardous chemicals.
- Compatible with all copper grounding systems.
- Contains a corrosion inhibitor to protect copper.
- Will not expand or shrink.
- Not affected by freezing.
- Typical resistivity < 10 Ohm-cm.

### VERTICAL INSTALLATION



### HORIZONTAL CONSTRUCTION/GRID CONSTRUCTION

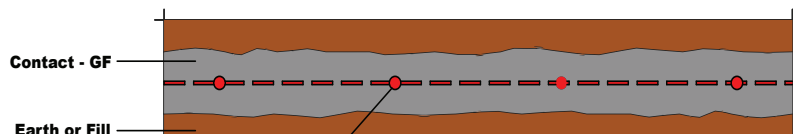

# thermOweld®

800.558.1373