

Quick Reference Guide

Emergency Preparedness for Healthcare

Temporary Power

Temporary Power Distribution Boxes

| Rating | Type | Qty | Receptacle Rating | Protection | | Catalog Number |
|------------------------------|----------------------|-----|-------------------|------------|-----|----------------|
| | | | | Overload | GFI | |
| 50A 120/240V AC (Maximum) | Straight Blade | 6 | 20A, 125V | Yes | Yes | TPDS |
| | Twist-Lock® | 1 | 30A, 250V | Yes | No | |
| | Twist-Lock® (Inlet) | 1 | 50A, 125/250V | No | No | |
| | Twist-Lock® (Outlet) | 1 | 50A, 125/250V | No | No | |



Temporary Power Cables

| Rating | Cable Type | Length (ft) | Male Device | Female Device | Weatherproof Boot | Catalog Number |
|--------------|------------|-------------|-------------|---------------|-------------------|----------------|
| 50A 125/250V | 6/3, 8/1 | 50 | CS6365L | CS6364L | No | TPC50 |

50A Twist-Lock® Devices

| Rating | Description | Plug | Connector |
|---------------|-------------------------|----------------------------------|----------------------------------|
| 50A 125V/250V | 3-Pole 4-Wire Grounding | CS6365C CS6365L | CS6364C CS6364L |

Temporary Lighting

LED Stringer Lights

| Description | Rating | Cord Type | Lumens | Cord Length | Catalog Number |
|---|----------|------------|--------|-------------|----------------------|
| 60 LEDs per fixture, 5 fixture light string | 15A 125V | #18/2 SJTW | 1,100* | 50 ft. | HBL182S50LEDH |

*Lumens per fixture.

A Type (Edison) Twist-Lock® and Straight Blade Light Strings

| Description | Rating | Max Watts** | Cord Type | Cord Length | Catalog Number |
|---|----------|-------------|------------|-------------|----------------------|
| Straight blade, 10 fixture light string; plastic guards | 15A 125V | 150 | #14/2 STJW | 100 ft. | HBL142SJ100PS |

Max watts per fixture. **HBL143SJ100PS light strings are rated for 1875 Watts total. The total wattage must be considered when daisy chaining lights strings to each other.




Cable Protection

TredTrak® Systems

| Description | | | | Catalog Number |
|---------------------|----------------------|-----------------|-----------------|--|
| 5 channel TredTrak® | Straight | Blue and yellow | Blue and yellow | HBLTRED5B HBLTRED5ECB |
| | End caps (pair only) | Yellow | | |

ProTrak™ Systems

| Description | | | Catalog Number |
|--------------------|--------------|--------------|--------------------|
| 1 channel ProTrak™ | Hinged cover | 10.81" (274) | PROTRK1225Y |

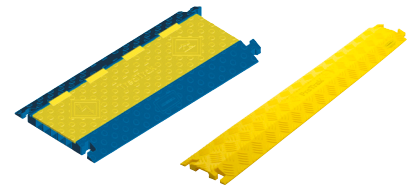

Single Pole Devices

Series 16 Inlines

| Description | Color | 300A | | 400A | |
|-------------|-------|------------------|------------------|------------------|------------------|
| | | Male | Female | Male | Female |
| Inline | Black | HBL300MBK | HBL300FBK | HBL400MBK | HBL400FBK |



Twist-Lock® Devices

Twist-Lock® Devices

| NEMA Rating | Poles/Wires | Plug | Connector | Receptacle |
|--------------|-------------|-------|----------------|----------------------------------|
| 20A 250V | L6-20 | 2P/3W | HBL2321 | HBL2323 HBL2320 |
| 20A 125/250V | L14-20 | 3P/4W | HBL2411 | HBL2413 HBL2410 |
| 30A 125V | L5-30 | 2P/3W | HBL2611 | HBL2613 HBL2610 |
| 30A 125/250V | L14-30 | 3P/4W | HBL2711 | HBL2713 HBL2710 |



Quick Reference Guide

Emergency Preparedness for Healthcare


Watertight Devices

Straight Blade Watertight Devices

| NEMA Rating | Poles/Wires | Color | Plug | Connector |
|-------------|-------------|--------|------------------|------------------|
| 15A 125V | 5-15 | Yellow | HBL14W47A | HBL15W47A |
| 20A 125V | 5-20 | | HBL14W33A | HBL15W33A |

Twist-Lock® Watertight Devices

| NEMA Rating | Poles/Wires | Color | Plug | Connector |
|-----------------|-------------|--------|-----------------|-----------------|
| 20A 125V | L5-20 | Yellow | HBL26W47 | HBL27W47 |
| 20A 250V | L6-20 | Yellow | HBL26W48 | HBL27W48 |
| 30A 125/250V AC | L14-30 | Yellow | HBL28W74 | HBL29W74 |

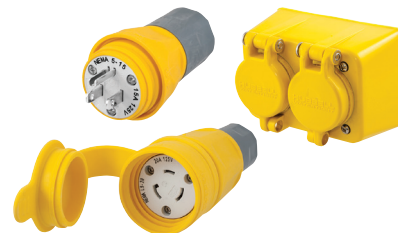

Straight Blade Devices

HBL® Series Hospital Grade Receptacles

| Description | Standard | Tamper-Resistant |
|--|-----------------------|--------------------|
| 20A 125V extra heavy duty hospital grade duplex receptacle | White HBL8300W | HBL8300SGWA |

Shown in white. For additional colors, see our full line catalog.

SNAPConnect® Hospital Grade Receptacles

| Description | Color | 20A 125V |
|--|-------|---------------------|
| Duplex receptacle, finder groove, nylon face | White | SNAP8300WA |
| USB charger tamper-resistant duplex receptacle | | SNAP8300USBW |

Requires SNAPConnect® pigtailed connector | For additional colors, see our full line catalog.

Hospital Grade Plugs and Connectors

| Description | 15A 125V | 20A 125V |
|-----------------------|-----------------------|-----------------|
| Insulgrip® plugs | Black and white nylon | HBL8215C |
| Insulgrip® connectors | | HBL8219C |
| | | HBL8315C |
| | | HBL8319C |

Heavy Duty Plugs and Connectors

| Description | 15A 125V | 20A 125V |
|-----------------------|-----------------------|-----------------|
| Insulgrip® plugs | Black and white nylon | HBL5266C |
| Insulgrip® connectors | | HBL5269C |
| | | HBL5366C |
| | | HBL5369C |



GFCI Devices


Heavy Duty GFCI Receptacles

| Description | Color | 20A 125V |
|--|-------|-----------------------|
| Standard hospital grade | White | GFRST83W |
| Tamper-resistant, weather resistant hospital grade | | GFTWRST83W |
| SNAPConnect® commercial grade | | GFTWRST20SNAPW |

For additional colors, see our full line catalog.

Circuit Guard® Portable GFCI Line Cords, 15A 120V AC

| Description | Automatic Set | Manual Set |
|----------------|----------------|------------------|
| GFCI line cord | 18" (45.7 cm) | GFP4C15A |
| | 6' (182.9 cm) | GFP6C15A |
| | 25' (762.0 cm) | GFP25C15A |
| | | GFP4C15M |
| | | GFP6C15M |
| | | GFP25C15M |

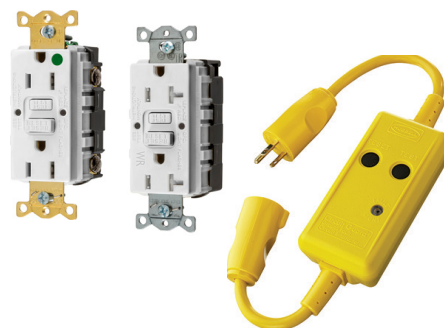

Hospital and Medical Grade Power Bars

| Description | # of Outlets | Cord Length (ft) | 15 Amp |
|---|--------------|------------------|------------------|
| Hospital Grade Power Bar w/External Ground Stud | 6 | 6 | HG66B |
| | | 12 | HG612B |
| Medical Grade Power Bar | 6 | 6 | MCP66BHG |
| | | 12 | MCP612BHG |
| | | 15 | MCP615BHG |



Contact Hubbell for other configurations (20Amp, # of Outlets, Cord Length)

