


Copper FASTAP™ with Lineman Assist™ Expansion

Stainless Steel and Shear Nut Hardware Options now available

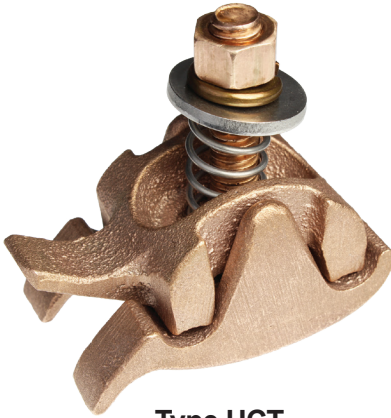

Type UCT

Markets

- Utilities

Application

- Mechanical tapping of copper conductors in primary, secondary, and service drop applications
- Accommodates copper to copper applications

Catalog Number	Conductor Range		Conductor Diameter				Torque (in-lb)	Wrench Size	Dimensions		
	Groove A (Run)	Groove B (Tap)	Groove A (Run)		Groove B (Tap)				L	H	W
	Copper	Copper	Min	Max	Min	Max					
UCT26	8 Sol - 2/0 Str	8 Sol - 2/0 Str	.13	.45	.13	.45	240	9/16	1.62	2.62	2.50
UCT32	1 Sol - 400 kcmil	8 Sol - 4/0 Str	.29	.73	.13	.56	240	9/16	1.62	2.62	2.82

- Add "SS" for stainless steel hardware
- Add "C" to include cover a cover
- Add "HN" for shear nut
- Cover may be ordered separately (UCTCOVER)
- To ensure proper tightening torque, use BURNDY® BTW Series Torque Wrenches



Type UCT-SS



Type UCT-HN



UCTCOVER

Customer Service 1-800-346-4175 | Tool Service Center 1-800-426-8720 | Technical Services 1-800-451-4956 | www.burndy.com