


Using TKO Dual Knockouts

On RACO® Electrical Boxes

The same instructions apply for concentric or eccentric knockouts.

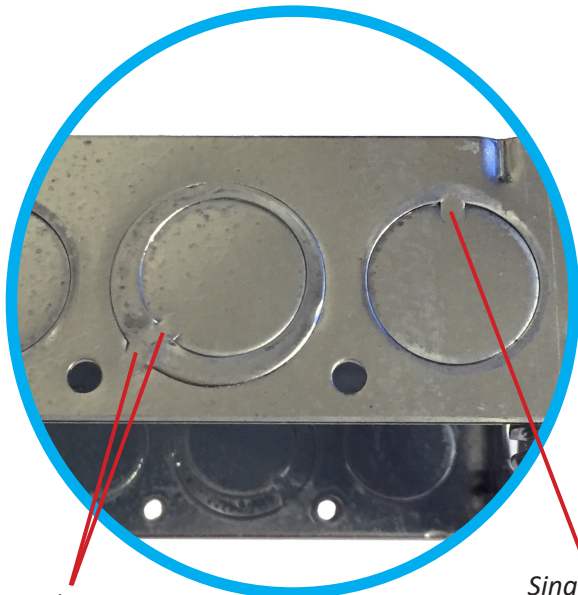

Dual Ties

Single Tie

With a dual KO, always begin with the inner tab. Start by identifying the tie on the KO.

During the RACO manufacturing process, the KO tab is pushed back in place with a small piece of steel remaining uncut (called a tie). The tie, in conjunction with the flattened feature, holds the KO in place until it is removed.



Using a tool such as a pliers, begin to tap on the opposite end of the tie until the tab pushes through. Then, from the inside of the box, use a pliers to twist off the KO tab.



Next, if the 3/4" KO is needed, then proceed to remove the second tab of the dual knockout. Using a pliers, begin to pry the edges so that the ring can be twisted off at the tie.