

Convention Center Pin and Sleeve Devices


Convention Center Pin and Sleeve Devices

Hubbell's newest offering of 60A, 4P 5W, 277/480V AC, pin and sleeve devices are specifically designed and built to meet the demanding needs of Convention Centers and provide reliable performance for power distribution.

These devices are certified to UL 1682 & UL 2305, with a light-weight, low profile, polycarbonate construction, that mate with the current installed base, and are able to accept both round and flat cable.

FEATURES

- Full Line: Plug, Connector, Receptacle, Inlet
- 60A, 4P 5W, 277/480V AC
- Manufactured in a durable light-weight polycarbonate construction to withstand heavy impact
- Mates with existing installed base
- Single device that accepts both round and flat cable
- Brass pins to maximize conductivity
- First to mate and last to break ground pin

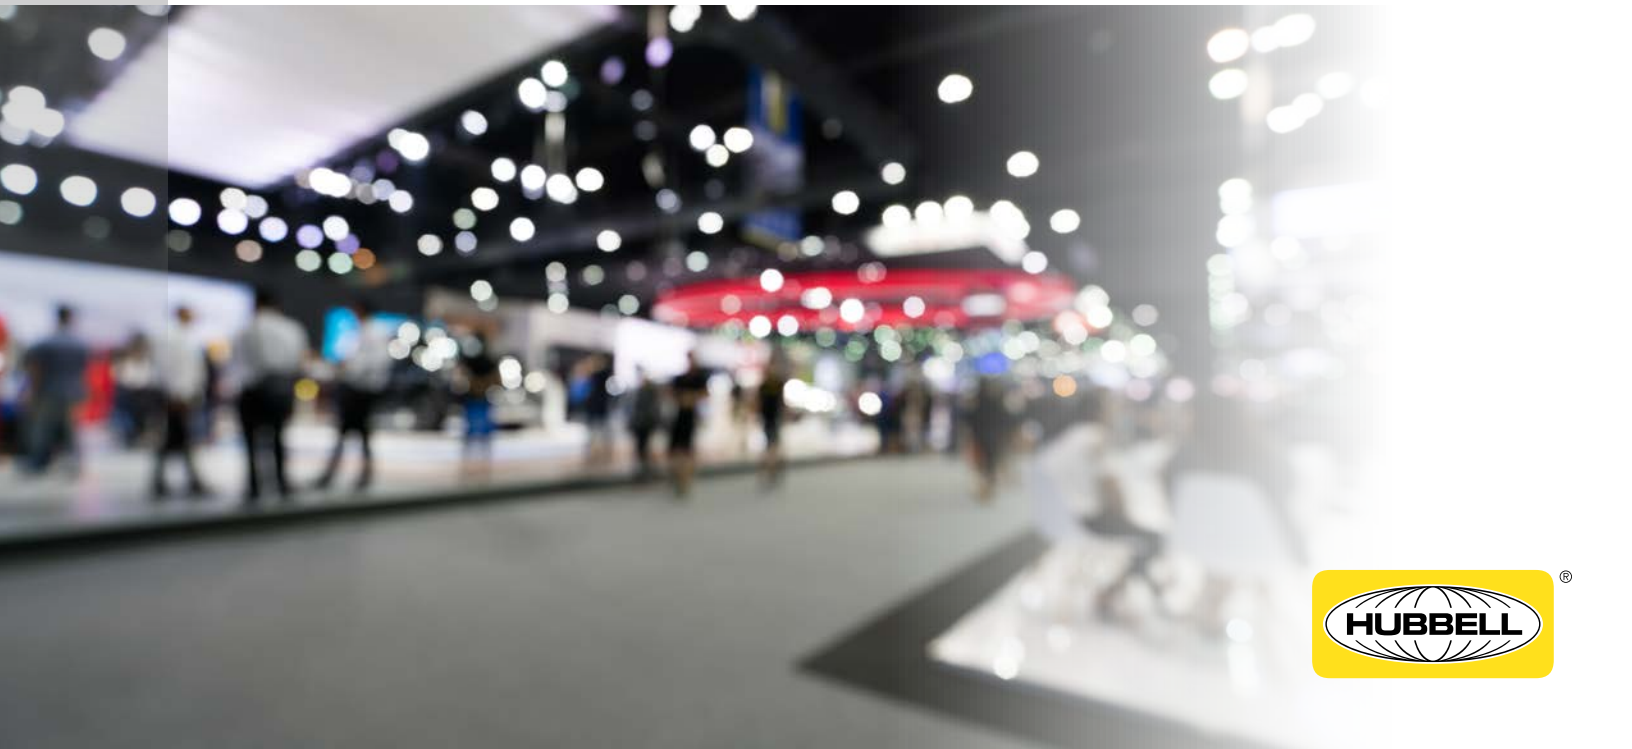

Convention Center Pin and Sleeve Devices

Convention Center Pin and Sleeve Devices

Description	Catalog Number
Pin and Sleeve, 4P 5W, 60A 277/480V AC, Plug	HBL5607P
Pin and Sleeve, 4P 5W, 60A 277/480V AC, Connector	HBL5607C
Pin and Sleeve, 4P 5W, 60A 277/480V AC, Inlet	HBL5607B
Pin and Sleeve, 4P 5W, 60A 277/480V AC, Receptacle	HBL5607R



HBL5607P



HBL5607C



HBL5607B



HBL5607R

Specifications

Pole/Wire Configuration	4-pole, 5-wire grounding
Voltage Rating	60A, 277/480V AC
Material	Polycarbonate
Contacts	Brass

Product Dimensions Inches (mm)

Catalog Number	A	B	C	D
HBL5607P	6.36" (161.5)	3.46" (87.9)	—	—
HBL5607C	6.49" (164.8)	3.46" (87.9)	—	—
HBL5607B	3.75" (95.3)	3.37" (85.5)	2.38" (60.3)	3.25" (82.6)
HBL5607R	3.75" (95.3)	3.54" (89.9)	2.38" (60.3)	3.25" (82.6)

