

DRAWING NO.  
10083604

4

3



2

1

TABLE

REV.	DATE	DESCRIPTION	ECO	BY	C'K'D.
A	02/22/08	DRAWING RELEASED	15485	RB	PL

CATALOG NO.	BODY MATERIAL DESCRIPTION	HARDWARE DESCRIPTION
UC25A10SLS1	ALUMINUM	5/16-18 ANODIZED ALUMINUM BOLT, 9/16 INCH ACROSS HEAD FLATS

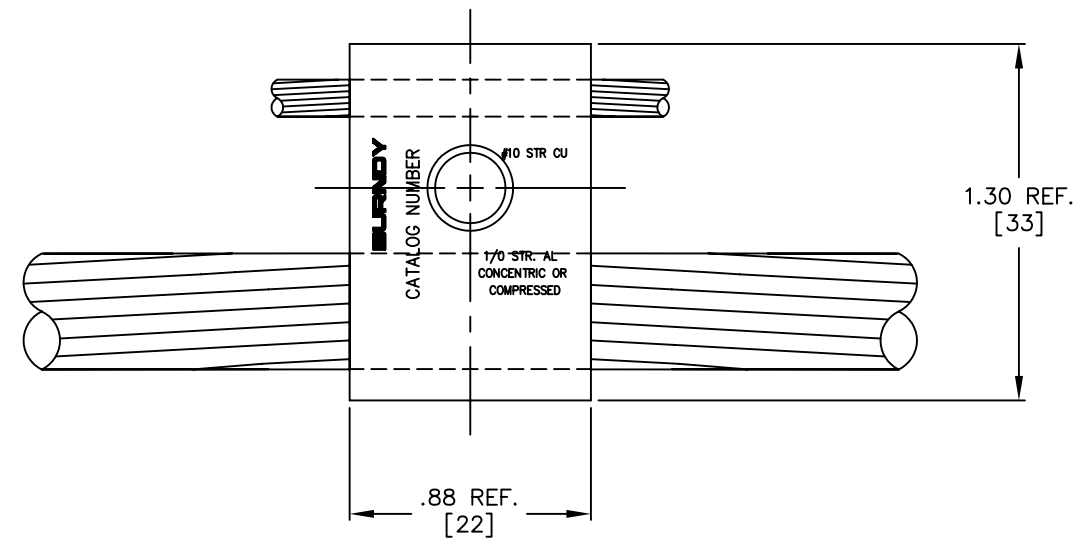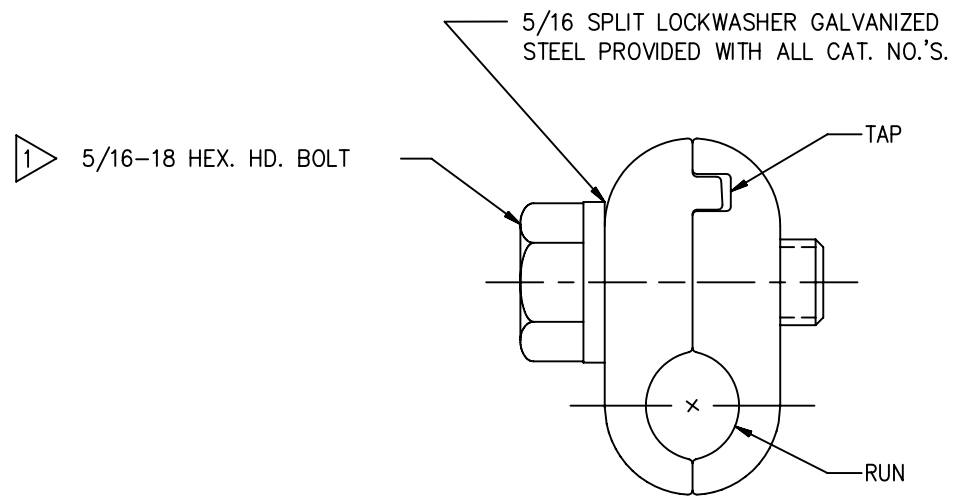

REF: FD206754

ACCOMMODATES:

1/0 STR. AL. (.362/.398) - #10 STR. CU.

NOTES:

- 1 SEE TABLE FOR CATALOG DESCRIPTION.
- 2. ALL CATALOG NUMBERS INCLUDE PETROLEUM BASED PENETROX™ APPLIED ON RUN AND TAP CONDUCTOR GROOVE.
- 3. CATALOG NUMBERS ARE INDIVIDUALLY SEALED IN A POLYBAG.
- 4 RECOMMENDED TIGHTENING TORQUE 180 IN-LBS FOR GALVANIZED STEEL BOLT. FOR ANODIZED ALUMINUM BOLT 140 IN-LBS.
- 5. DIMENSION IN BRACKETS [ ] ARE IN MILLIMETER ROUNDED OFF TO THE NEAREST MILLIMETER, UNLESS OTHERWISE NOTED, AND ARE FOR REFERENCE ONLY.

TO ORDER BURNDY PRODUCTS CALL 1-800-346-4175  
MANCHESTER, NH 03109, USA  
FOR PRODUCT INFO = <http://www.fciconnect.com>

CLAMP, PARALLEL TAP

ITEM NO: 10083597

CAT NO: UC25A10SLS1

SCALE: NONE	
DRAWN BY: R. BOISVERT	02/22/08
CHECKER: P. LAPONIUS	02/22/08
DSN APPVL: M. RZASA	01/21/08
MFG APPVL: ---	---
QC APPVL: J. BRODEUR	01/10/08
MKT APPVL: D. HAMILTON	01/10/08
PROD FAM: ---	
PROJECT #: ---	SIZE
DOCUMENT TYPE: Sdtes	C
REL LEVEL: AutoCAD	



DRAWING NO	REV
10083604	A
SHEET 1 OF 1	