


REV	DATE	DESCRIPTION	ECO	BY	C'HK.
B	03/17/2014 00:00:00 AM	DRAWING RELEASED	35299	RK	MB

CATALOG NUMBER	ITEM NUMBER	CONDUCTOR		BOLT SIZE	DIMENSIONS									DIE INDEX	COLOR CODE	INSTALLATION TOOLING (# CRIMPS)				WIRE STRIP LENGTH		
		CODE AWG	NAVY		B	C	E	EI	K DIA.	L	N	O.D.	T REF.			Y MIN.	MECHANICAL	HYDRAULIC			DIELESS (# CRIMPS)	
YAZ6C2TC38SL	10112964	#6 AWG	30		1.12 [28]	.58 [15]				3.22 [82]		.29 [7]	.06 [2]		7 OR 374	BLUE	MD6, OUR840, MD7-34R	Y45 <sup>3</sup>	Y35, Y39, Y750, Y46, PAT750 <sup>4</sup>	BCT500HS, Y500CTHS	YIMRTC (2) MY29-3 (2) MY29-11 (2) MRC840 (2) Y644HS (2) Y81KFT (1) Y122CMR (2) Y81KFTMBH (1) PAT81KFT-18V (1)	1-1/16
YAZ3C2TC38SL	10112965	#3 AWG #2 SOL (25mm <sup>2</sup> STR.)	50	3/8 [M10]	1.25 [32]	.58 [15]	.75 [19]	1.00 [25]	.41 [10]	3.39 [86]	.41 [10]	.38 [10]	.08 [2]	1.43 [36]	9	WHITE	W3CRT (2)	U3CRT (2)	U3CRT (2)	W3CRT (2)		1-5/16
YAZ2C2TC38SL	10112966	#2 AWG.	60		1.25 [32]	.60 [15]				3.41 [87]		.42 [11]	.11 [3]		10	BROWN	W2CVT (2) W2CRT (2) X2CRT (2)	U2CRT (2)	U2CRT (2)	W2CVT (2) W2CRT (2) X2CRT (2)		

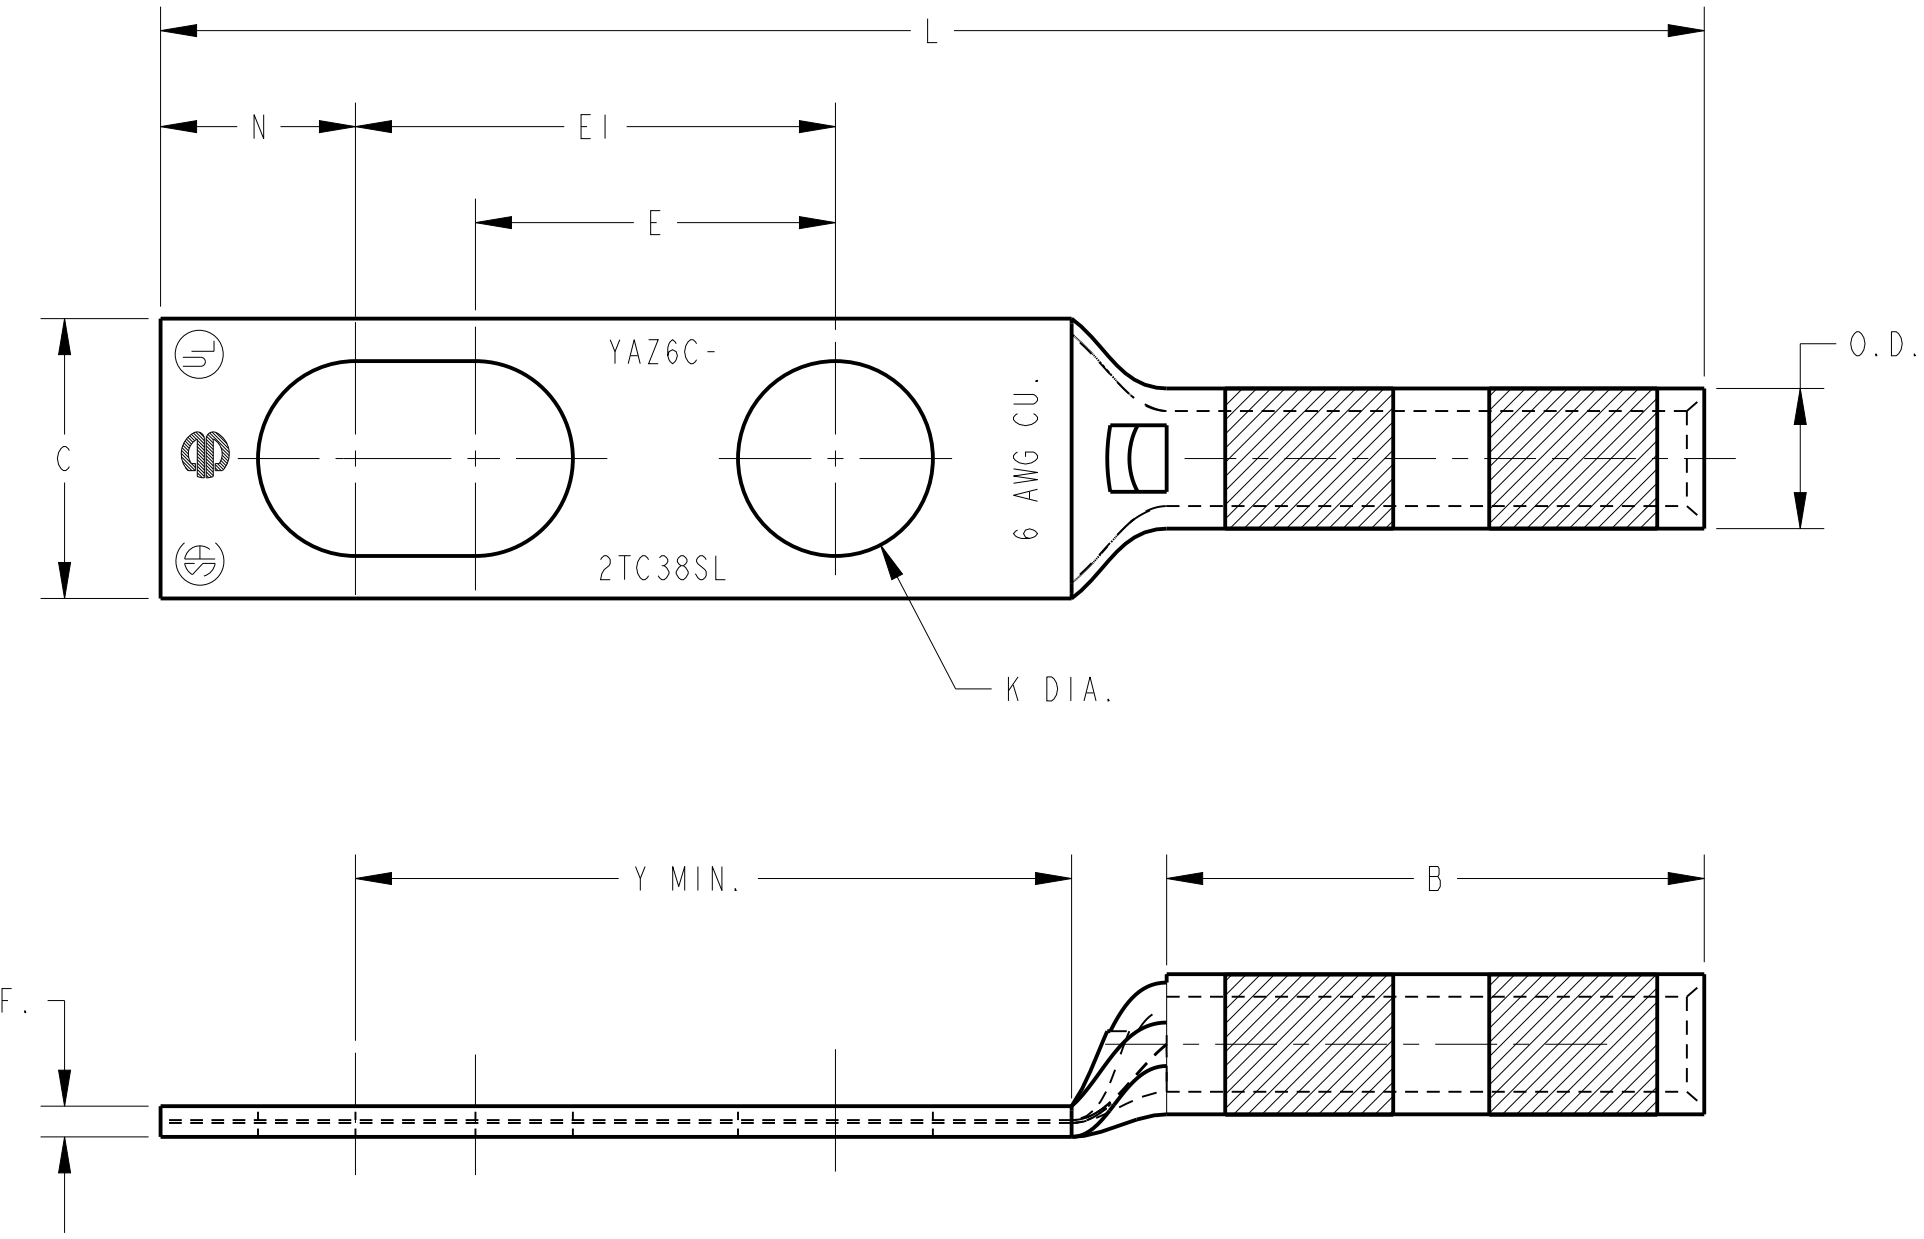

- NOTES:
- MATERIAL: COPPER TUBING.
  - FINISH: TIN PLATED.
  - CATALOG # PT6515 ADAPTOR IS REQUIRED TO USE "U" DIES IN Y45 SERIES TOOLS.
  - CATALOG # PUADP-1 ADAPTOR IS REQUIRED TO USE "U" DIES IN Y46 SERIES TOOLS.
  - PERMANENT DIE IN TOOLING.
  - DIMENSIONS IN BRACKETS [ ] ARE IN MILLIMETERS ROUNDED OFF TO THE NEAREST MILLIMETER, UNLESS OTHERWISE SPECIFIED, AND ARE FOR REFERENCE ONLY.

TO ORDER BURNDY® PRODUCTS CALL		HYLUG™, SLOTTED	
UNITED STATES: 1-800-346-4175 (LONDONDERRY, NH)		ITEM NO: SEE TABLE	
CANADA: 1-800-361-6975 (QUEBEC) 1-800-387-6487 (ALL OTHER PROVINCES)		CAT. NO: YAZ--2TC38SL (TABLE)	
FOR PRODUCT INFO: <a href="http://www.burndy.com">http://www.burndy.com</a>		DRAWN BY: N.D.KANNAN 03/12/10	
		CHECKER: J.MICHAUD 02/04/11	
		DSN APPVL: J.MICHAUD 02/04/11	
		MFG APPVL: T.THRELFALL 02/04/11	
		QA APPVL: T.WATTS 02/05/11	
		MKT APPVL: J.SYLVA 02/10/11	
		SCALE: 2.500	
		PROJ #: --	
		SIZE: C	
		DRAWING NO: 10114229	
		REV: B	
		DOCUMENT TYPE: Sales	
		SHEET 1 OF 1	
		REL LEVEL: Released	

REV: PE0200

A