


ITEM NO.	DESCRIPTION	QTY.
1	ST CONNECTOR DUST CAP	4
2	ST CONNECTOR NUT	4
3	1.8mm ST CONNECTOR BOOT	4
4	1.8mm DUPLEX CABLE	A/R

CATALOG NO.	DESCRIPTION	FIBER TYPE	CABLE JACKET COLOR
DFFCSTSTDxxMM	ST-ST FIBER PCORD 50/125um MULTIMODE DUPLEX	OM2	ORANGE
DFFCSTSTExxMM	ST-ST FIBER PCORD 50/125um MULTIMODE DUPLEX	OM3	AQUA


xx = LENGTH IN METERS

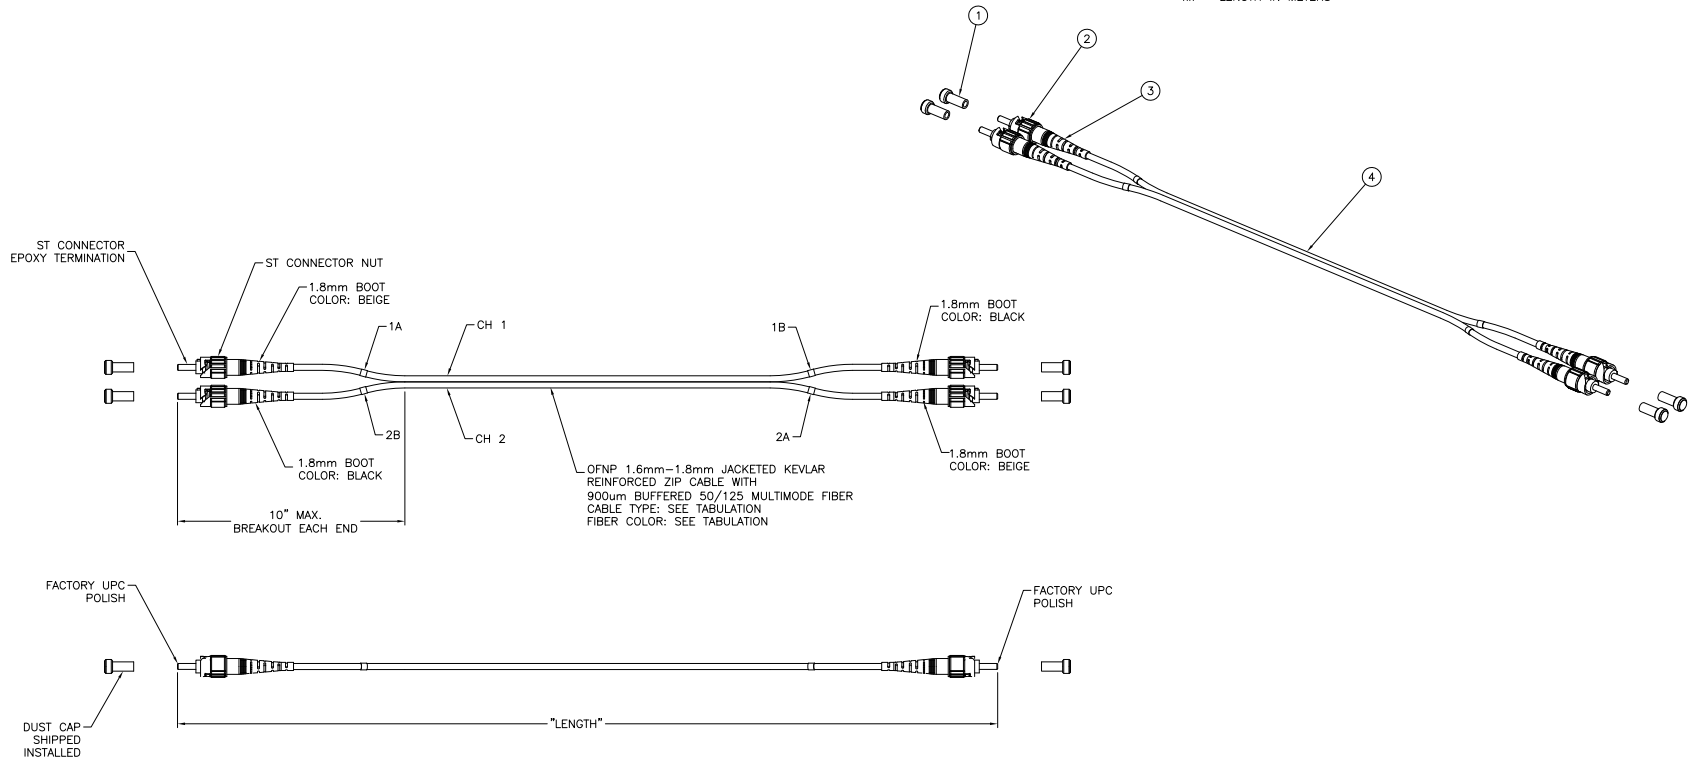

NOTES:

- CONNECTOR OPTICAL, MECHANICAL AND ENVIRONMENTAL PERFORMANCE MEETS TIA/EIA 568-C.3 SPECIFICATIONS.
- CONNECTOR USES A PC RADIUS TIP ZIRCONIA CERAMIC FERRULE.
- CONNECTOR NUT IS NICKEL PLATED ZINC DIE CAST.
- OPTICAL INSERTION LOSS TEST DATA INCLUDED IN EACH BAGGED PATCH CORD.
- CABLE MARKINGS TO IDENTIFY CHANNEL (1 OR 2) AND EACH END (A OR B).
- SPECIFICATIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

REV.	ECN	DATE	DESCRIPTION	CHG BY	APPD BY
D	23820	03/04/20	REVISED BOOT COLORS	AK	MMA

Created on AUTOCAD	DIMENSIONING AND TOLERANCE PER ANSI Y14.5M-1982. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (MM). TOLERANCES .XX = ±.01 (.25) .XXX = ±.005 (.127) .0000 = ±.0025 (.0635) ANGLE TOL. ±1°	PROJECT REFERENCE:	 Hubbell Premise Wiring HUBBELL INCORPORATED (Delaware) 14 Lord's Hill Road, Storington, Connecticut 06378
	IN ACCEPTING OUR DRAWINGS, BLUEPRINTS, OR SUPPORTING DOCUMENTATION FOR QUOTATION OR OTHER PURPOSES, YOU AGREE NOT TO DISCLOSE TO OTHERS THE IDEAS, INFORMATION, OR DESIGN SHOWN HEREIN, AND THAT YOU WILL MAKE NO USE OF SAME WITHOUT PERMISSION.	MATERIAL:	
DRAWN BY: PAUL S. MAGUIRE 02/12/03		CHECKED BY: CINDY TALBOT 04/24/03	SIZE: DRAWING NO. 11305C
APPROVED BY: CINDY TALBOT 04/24/03		SCALE: 1/1	REV. D SHEET 1 OF 1