



AIKEN BAYAMON

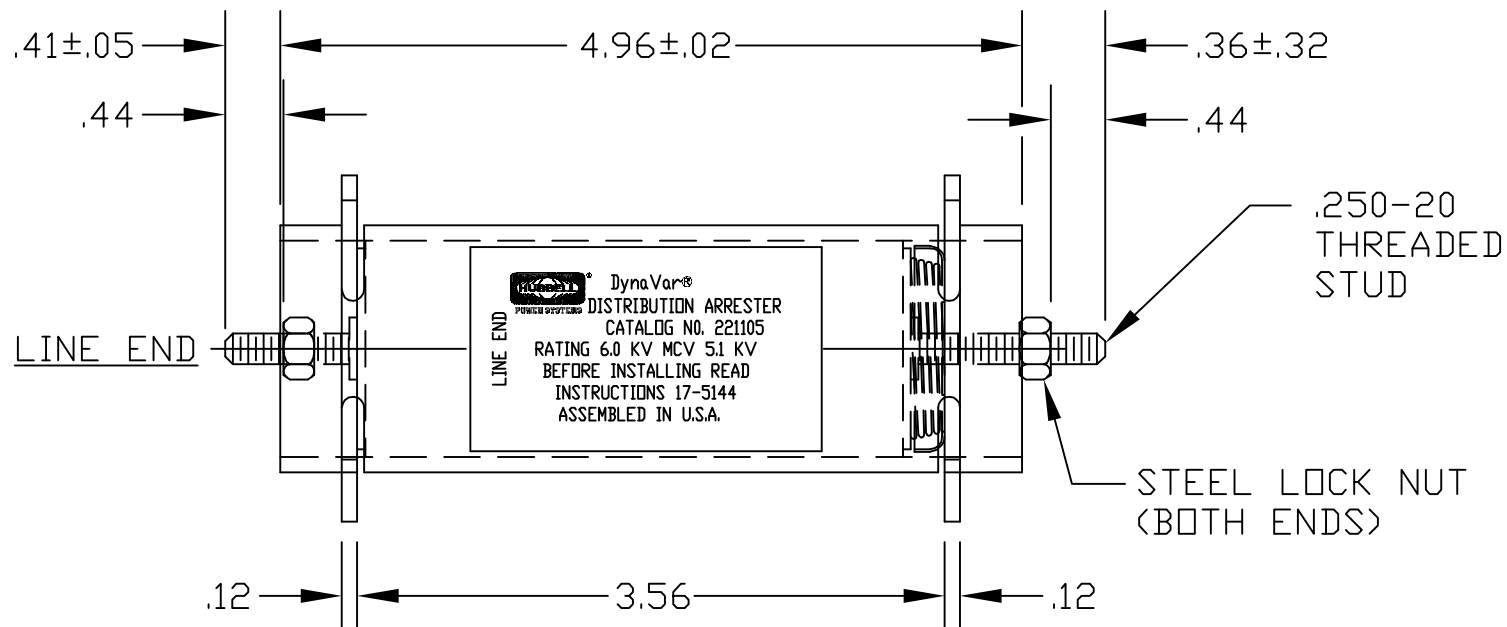

NOTES:

- 1) ARRESTERS ARE FOR USE IN TRANSFORMER OIL. THEY WILL OPERATE SATISFACTORY IN WEIGHTED AVERAGE OIL TEMPERATURE OF 90°C (125°C MAX.)
- 2) WEIGHT = 1.50

|   |          |        |          |  |  |                   |                                   |              |       |
|---|----------|--------|----------|--|--|-------------------|-----------------------------------|--------------|-------|
| 67189   | 10/24/16 | AS     | AWR      | TOLERANCE CHART<br>0.0 = ±0.10<br>0.00 = ±0.030<br>0.000 = ±0.015<br>ANGLES = ±30'<br>DO NOT USE FRACTIONS<br>CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS. |  HUBBELL® POWER SYSTEMS |                   |                                   |              |       |
| EC #  | DATE     | CHG BY | RESP ENG |  | TITLE UNDEROIL ARRESTER<br>5.1 KV MCOV   |                   |                                   |              |       |
| DESC OF DWG:<br>REPLACE 'MADE IN U.S.A.' WITH 'ASSEMBLED IN U.S.A.'<br>—<br>—<br>—<br>REASON (S) FOR CHANGE: —<br>DISPOSITION OF MAT'L: — |          |        |          | SIZE A   |  | DWG NO. 021468-00 | CAT / PART / ASSY NO. 221105-3002 |              | REV 4 |
|   |          |        |          | DO NOT SCALE THIS DRAWING  |  | DRN BY MAJ        | DATE 01/16/00                     | SHEET 1 OF 1 |       |