
NOTES:

- 1. DIMENSIONS SUBJECT TO +/- 5% TOLERANCE
- 2. LEAKAGE DISTANCE 927 mm
- 3. ALTITUDE 0-3600 m ABOVE SEA LEVEL 4. WEIGHT OF UNIT INCLUDING HARDWARE 3.9 kg
- 5. MAXIMUM CONTINUOUS LINE-TO-GROUND OPERATING VOLTAGE Uc 19.5 kV
- 6. RATED VOLTAGE Ur 24 kV RMS

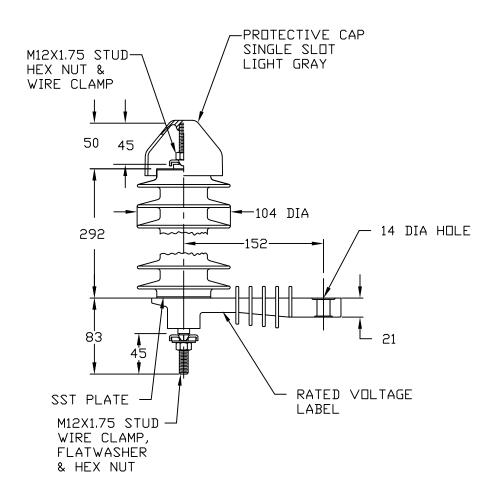

10 KA STEEP	500 A SWITCHING	MAXIMUM 8/20 RESIDUAL VOLTAGE - KV AT					
CURRENT Ures kV	SURGE Ures kV	1.5 kA	3.0 KA	5.0 kA	10 kA	20 KA	40 kA
85,5	56.4	61.6	66.0	69.9	76.2	86,6	102.0

DISTRIBUTION				
ARRESTER				
IEEE HEAVY DUTY				
IEC DH CLASS				

03/13/2023

CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.

