




REV	DATE	DESCRIPTION	ECO	BY	C'H'K.
A	11/02/2011 00:00:00 AM	CREATED SALES DRAWING FOR CAT.# SH2GBP41A6	26040	KR	NJS

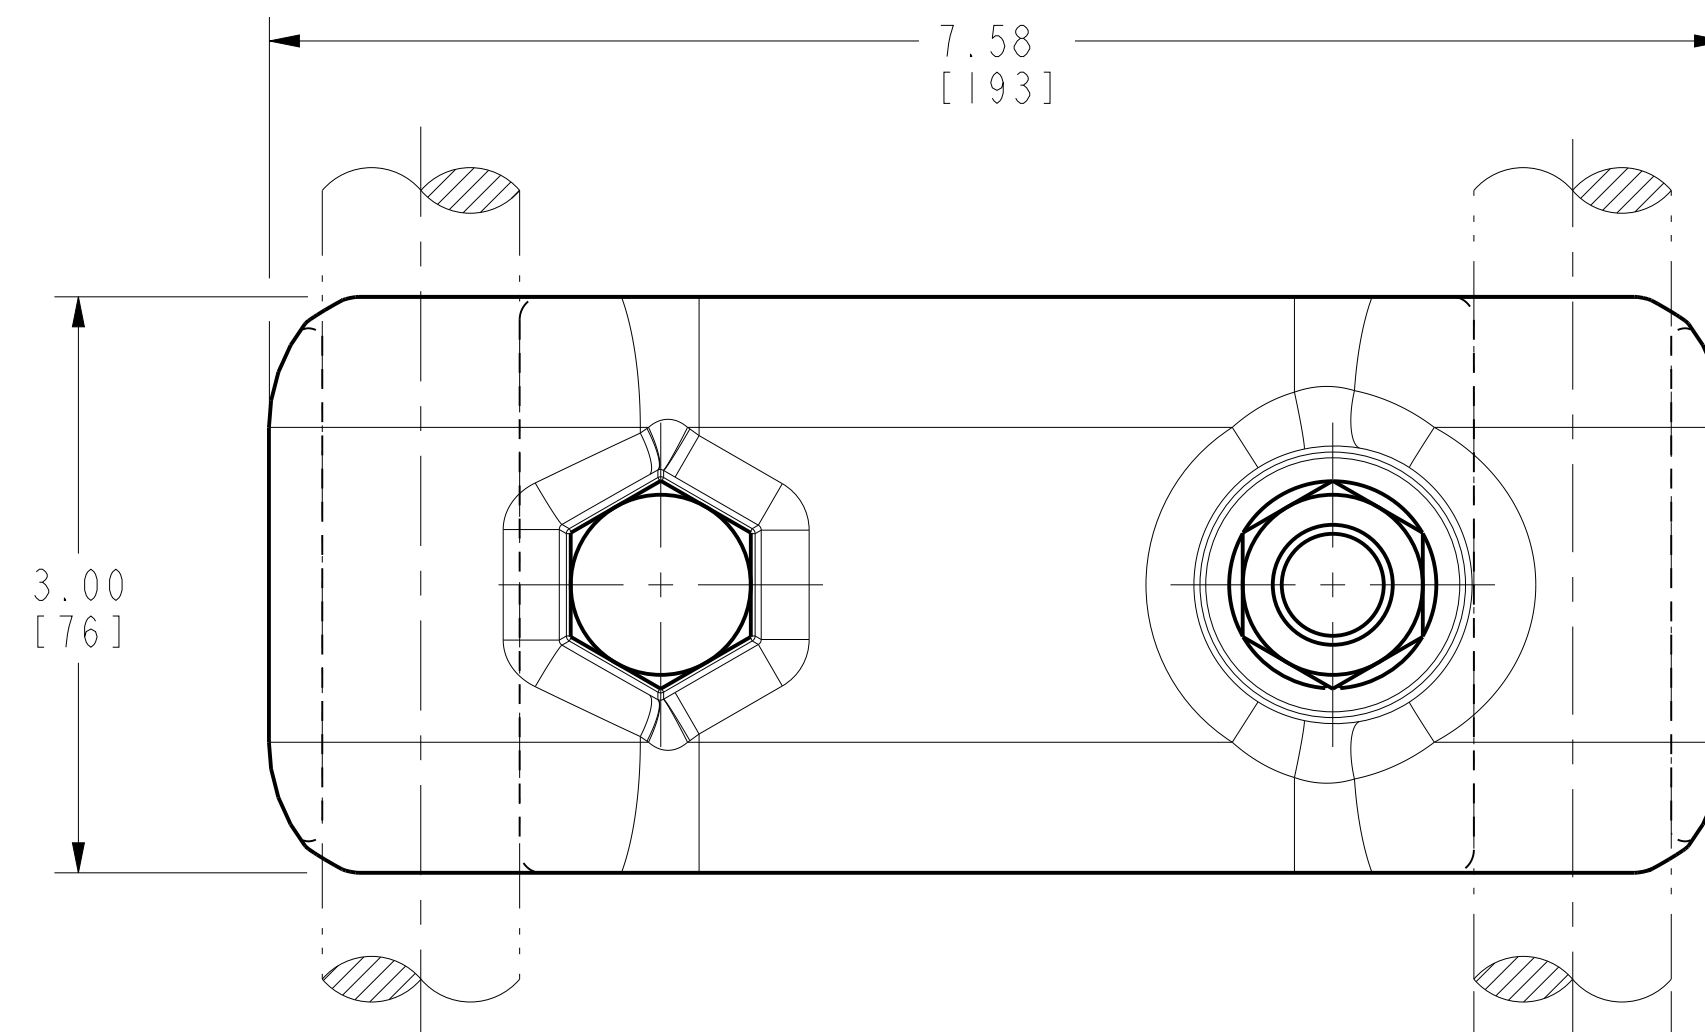

SEE ACCOMMODATES $\triangle 3$
(2 PLACES)

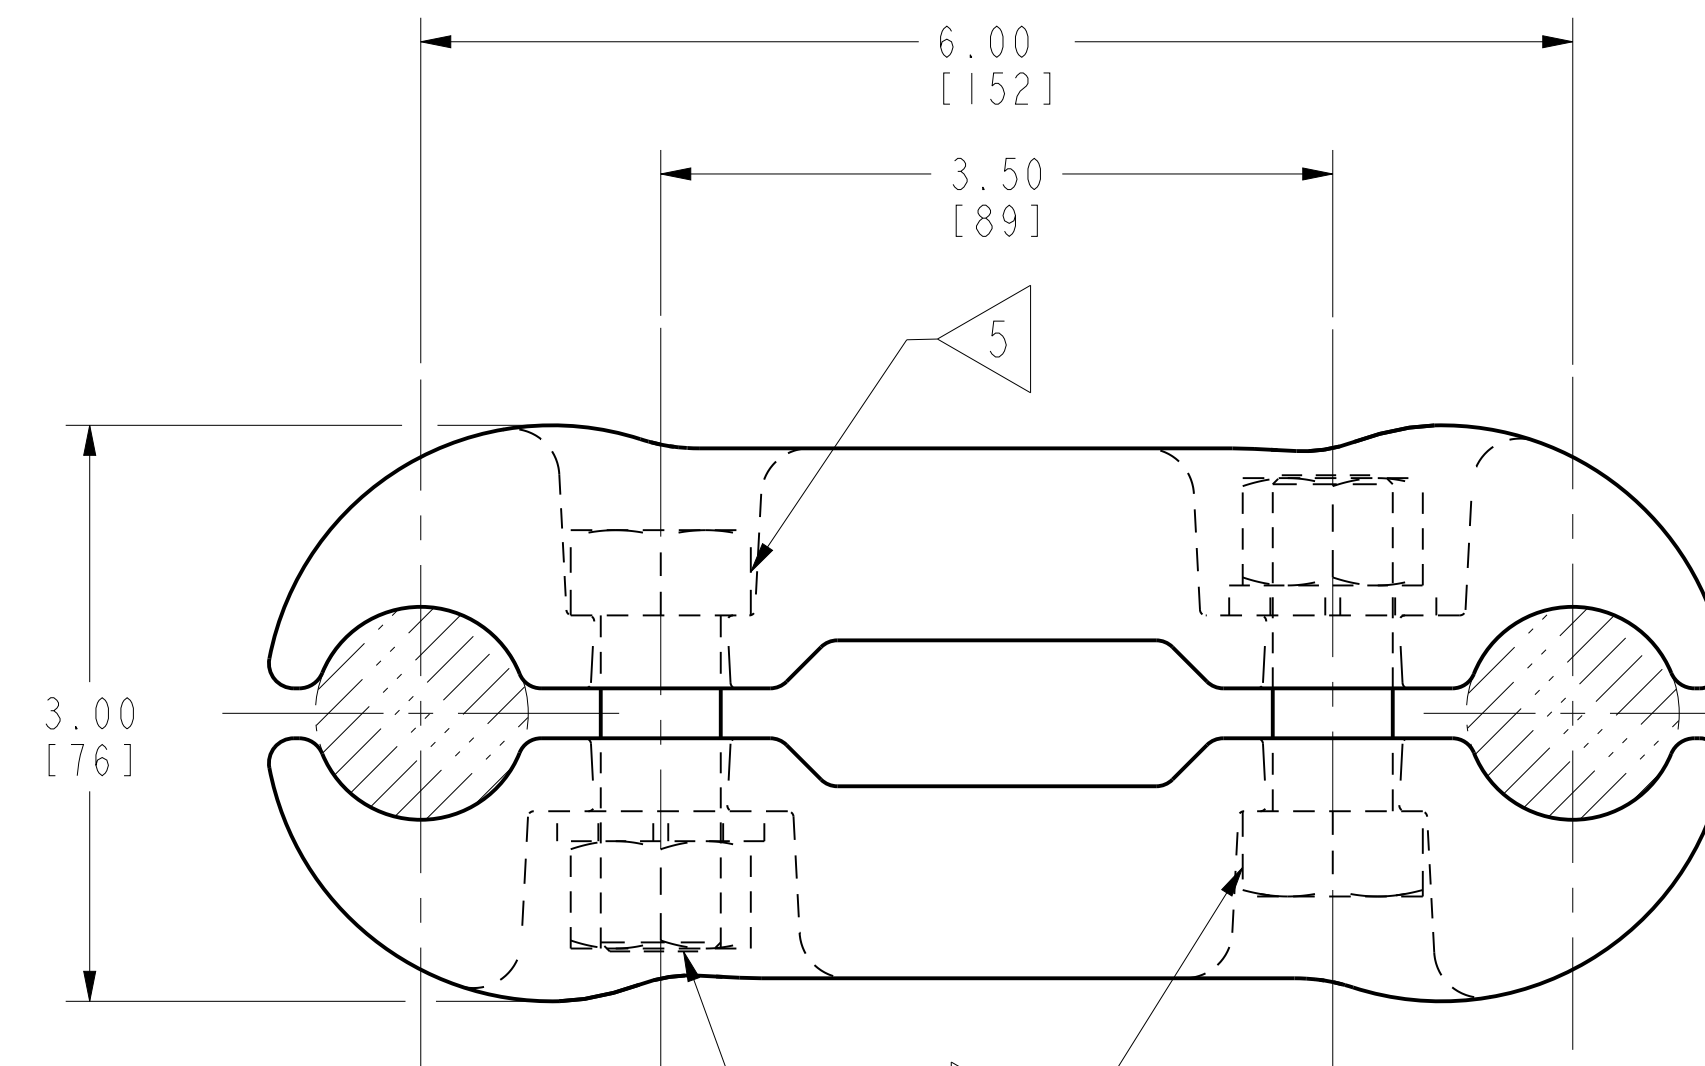

5/8" HEX. ALUMINUM BOLT,
ALUMINUM SPLIT LOCK WASHER
AND HEX. ALUMINUM NUTS.
(2 PLACES)

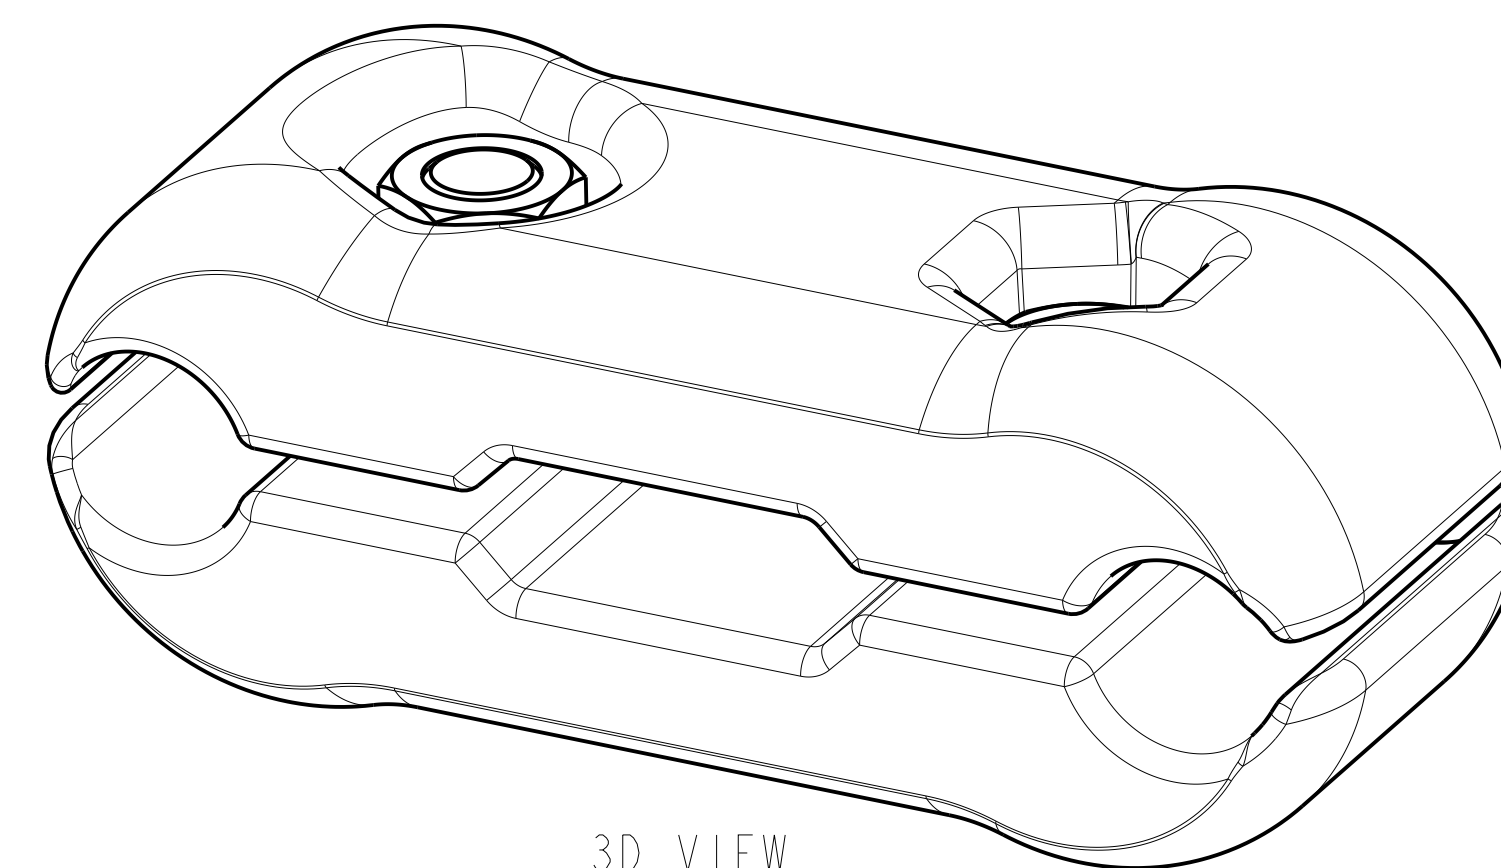

3D VIEW

NOTES:

- 1 MATERIAL:
CAST ALUMINUM ALLOY.
- 2 DIMENSIONS IN BRACKET [] DENOTES METRIC UNITS [SI UNITS]
AND ARE ROUNDED TO THE NEAREST WHOLE NUMBER UNLESS
OTHERWISE SPECIFIED THESE UNITS SHALL BE USED FOR
REFERENCE ONLY.
- $\triangle 3$ ACCOMMODATES:
(2) 795 Kcmil 37 STR (1.026 [26] DIA.) - 874.5 Kcmil 61 STR (1.078 [27] DIA.) AAC
715.5 Kcmil 24/7 STR (1.036 [26] DIA.) - 715.5 Kcmil 26/7 STR (1.051 [27] DIA.) ACSR
- 4 NOMINAL BOLT INSTALLATION TORQUE:
5/8" HEX. ALUMINUM HARDWARE 480 IN-LBS [55 Nm].
- $\triangle 5$ HEX BOLTS CAPTURED TO PREVENT TURNING DURING INSTALLATION.
- 6 THE CONCEPT SHOWN INCORPORATES DESIGN PRINCIPLES WHICH PERMIT
OPERATION AT A VOLTAGE GRADIENT NORMALLY ASSOCIATED WITH 550 KV
RMS OPERATION PHASE TO PHASE.
- $\triangle 7$ OPTIONAL HARDWARE VARIATIONS ARE AVAILABLE BY ADDING THE FOLLOWING
SUFFIX TO THE CATALOG NUMBER. EXAMPLE: S2GBP41A6GS
GS = GALVANIZED STEEL
SS = STAINLESS STEEL
- 8 MARKING:
BURNDY
S2GBP41A6
795 - 874.5 Kcmil AAC
715.5 Kcmil ACSR

TO ORDER BURNDY® PRODUCTS CALL		TWO CONDUCTOR SPACER, EHV	
UNITED STATES		ITEM NO: 26002109	6" BURNDY
1-800-346-4175 (LONDONDERRY, NH)		CAT. NO: S2GBP41A6	
CANADA:		DRAWN BY: M KOVILRAJ 11/02/11	
1-800-361-6975 (QUEBEC)		CHECKER: R LAVOIE 11/16/11	
1-800-387-6487 (ALL OTHER PROVINCES)		DSN APPVL: R LAVOIE 11/16/11	
FOR PRODUCT INFO: http://www.burndy.com		MFG APPVL: --	
		GA APPVL: J HILLMAN 11/16/11	
		MKT APPVL: V TORRES 11/17/11	
		SCALE: 1:1	
		PROD FAM: SUBSTATION	
		PROJECT #: --	30021852
		DOCUMENT TYPE: Sales	SHEET 1 OF 1
		REL LEVEL: Released	A

REV: PEO200