
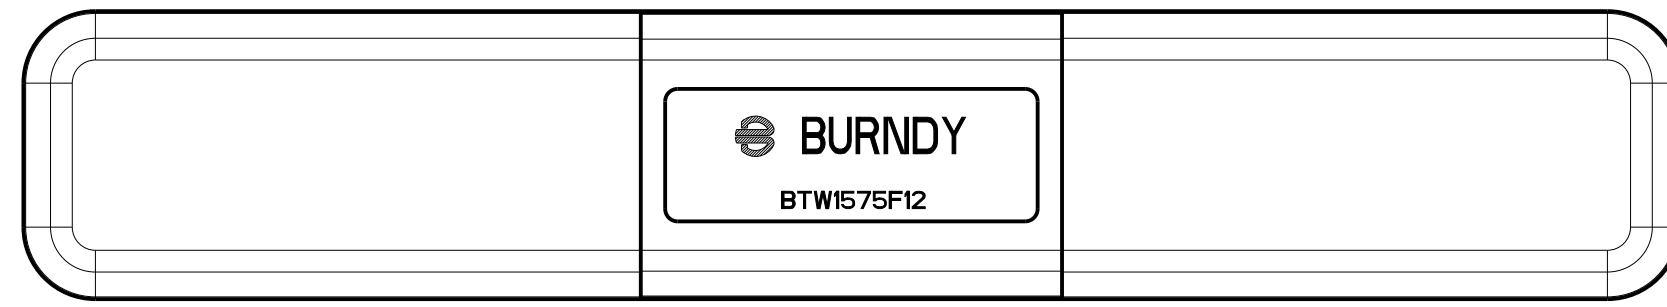


REV.	DATE	DESCRIPTION	ECO	BY	C'H'K.
A	12/13/2012 00:00:00 AM	NEW SALES DRAWING	29652	TRF	MAC

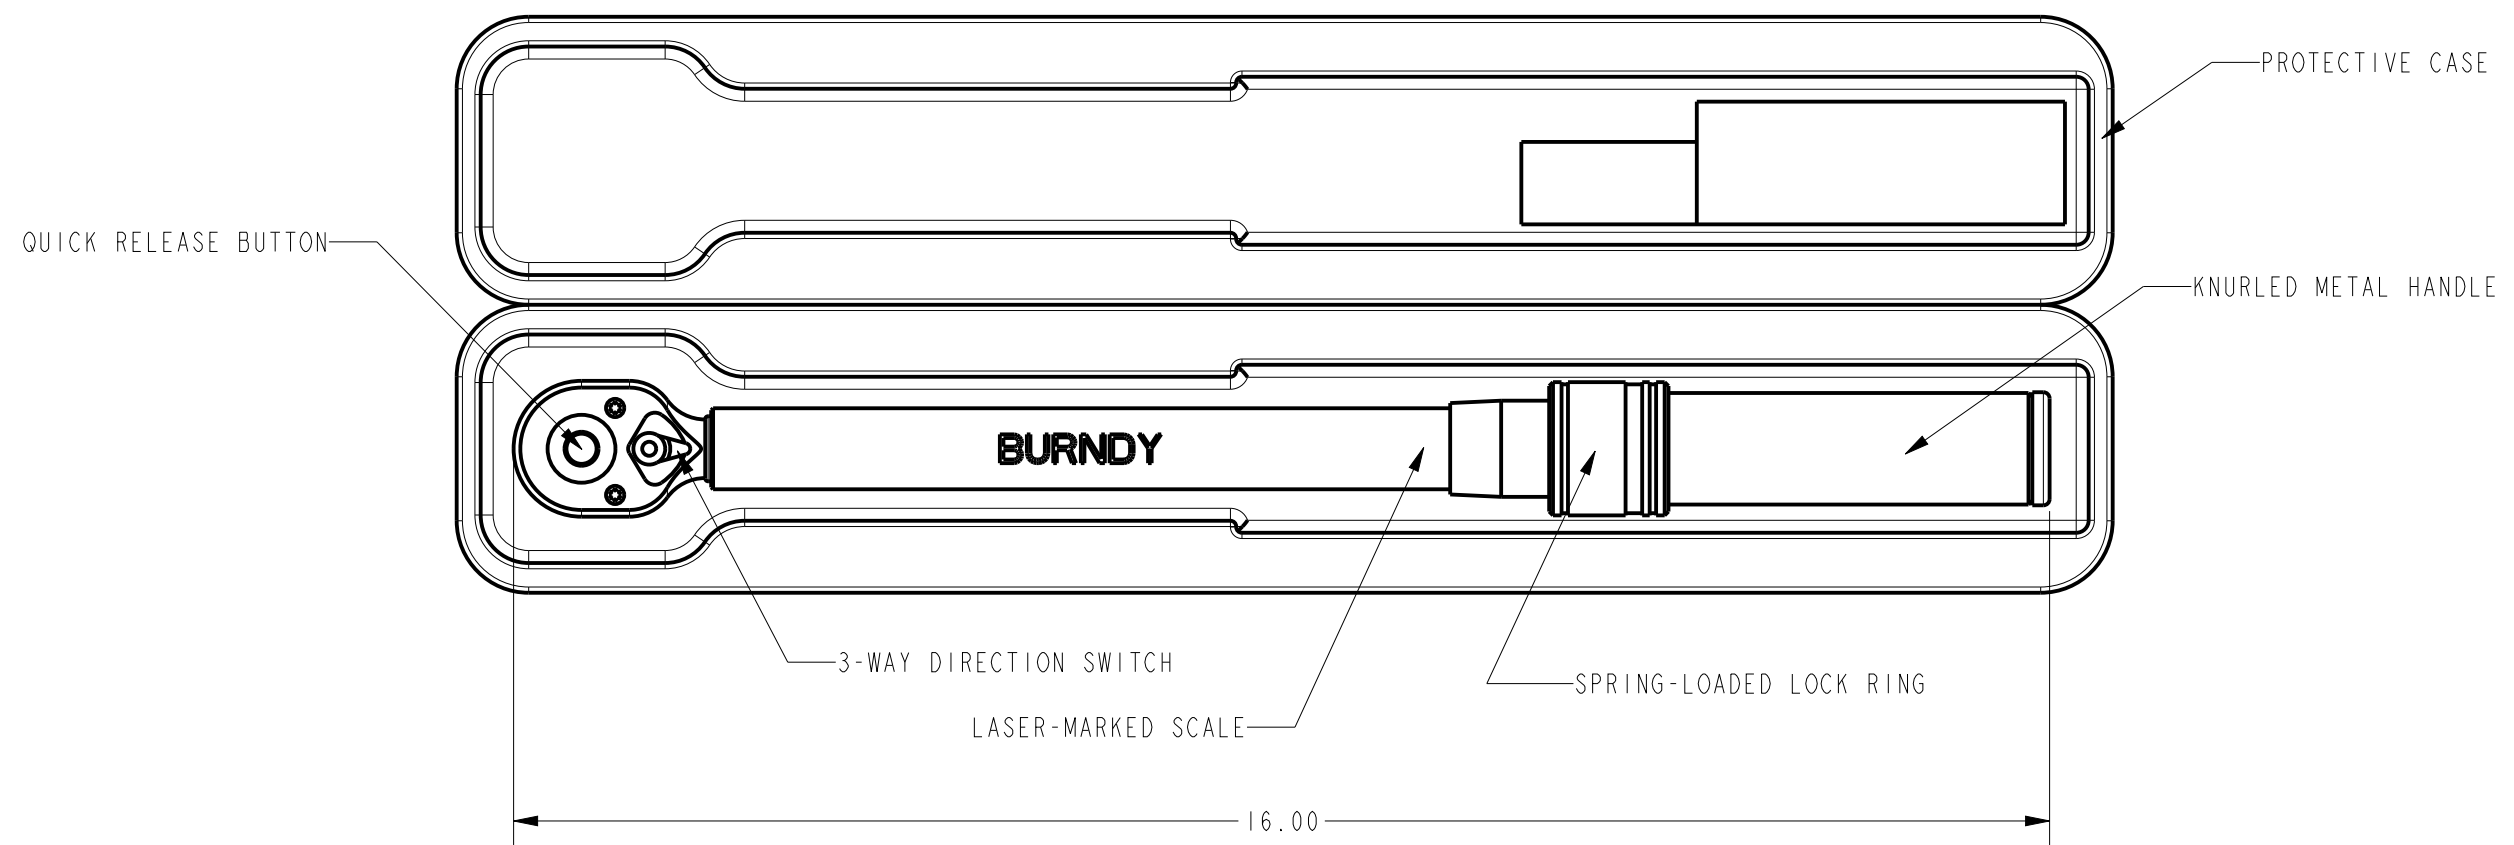

SPECIFICATIONS

TORQUE RANGE: 15-75 FT LB.
 SCALE INCREMENT: .5 LBS
 DRIVE: 1/2
 LENGTH: 16"
 WEIGHT: 2.50 LBS
 SCALE: FT-LB, N-m

FEATURES

1. MICROMETER-STYLE TORQUE WRENCH:
2. SIMPLE TORQUE SELECTION USING SPRING-LOADED LOCK RING AND EASY-TO-READ, LASER-MARKED SCALE.
3. WRENCH PRODUCES AUDIBLE CLICK WHEN SELECTED TORQUE IS REACHED.
4. CALIBRATED TO ASME B107.14-2004 AND ISO 6789:2003. CONSULT FACTORY FOR ADDITIONAL CALIBRATION SERVICE.

NOTES

CONTENTS OF PACKAGING INCLUDE TORQUE WRENCH, PROTECTIVE CASE, INSTRUCTIONS, AND CERTIFICATE OF CALIBRATION.

TO ORDER BURNDY® PRODUCTS CALL
 UNITED STATES:
 1-800-346-4175 (LONDONDERRY, NH)
 CANADA:
 1-800-361-6975 (QUEBEC)
 1-800-387-6487 (ALL OTHER PROVINCES)
 FOR PRODUCT INFO: <http://www.burndy.com>

TORQUE WRENCH, 1/2 DRIVE	
ITEM NO:	N/A
CAT. NO:	BTW1575F12
DRAWN BY:	T. FAUCHER 10/18/2012
CHECKER:	D. OWENS 10/18/2012
DSN APPVL:	P. WASON 12/05/2012
MFG APPVL:	S. GONYAW 12/04/2012
QA APPVL:	C. KOWALCZYK 12/05/2012
MKT APPVL:	D. OWENS 12/04/2012
PROD FAM:	TOOLS, MECHANICAL
PROJECT #:	--
DOCUMENT TYPE:	Sales
REL LEVEL:	Released
SCALE:	1:2
DRAWING NO	50002752
REV	A
SHEET 1 OF 1	

REV: PE0200