

REV	DATE	DESCRIPTION	ECO	BY	C'H'K.
A	11/05/2013	NEW DRAWING CREATED	33821	PB	VK

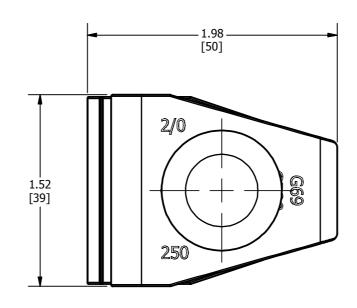

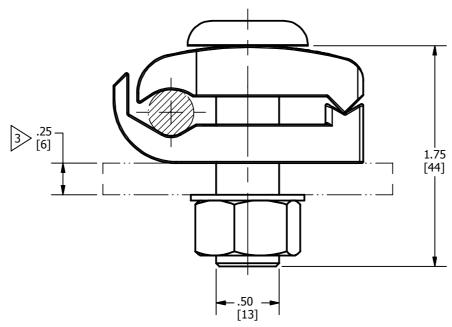

## NOTES:

1. MATERIAL:

**BODY** : CAST COPPER ALLOY HARDWARE: SILICON BRONZE

- 2. DIMENSIONS IN BRACKETS [ ] ARE IN MILLIMETERS ROUNDED OFF TO THE NEAREST MILLIMETER, UNLESS OTHERWISE SPECIFIED AND ARE FOR REFERENCE ONLY.
- 3. STANDARD BASIC CATALOG NUMBER AND BOLT LENGTH IS BASED ON A MAXIMUM BAR THICKNESS OF 1/4". ADD - T4 SUFFIX FOR USE ON A BAR WITH A 1/2" MAXIMUM THICKNESS. ADD - T8 SUFFIX FOR USE ON A BAR WITH A 1" MAXIMUM THICKNESS.
- 4. ACCOMMODATES:

AWG 2/0 SOLID (.365 DIA.) TO 250 KCMIL (.575 DIA.) STRANDED COPPER. 70MM<sup>2</sup> (10.9 MM) TO 120MM<sup>2</sup> (14.4MM) CLASS 2 STRANDED COPPER.

5. RECOMMENDED TIGHTENING TORQUE 480 INCH POUNDS. TO GREATLY REDUCE OR EXCEED THE RECOMMENDED TORQUE CAN ADVERSELY AFFECT THE PERFORMANCE ON THE CONNECTOR.

TO ORDER BURNDY® PRODUCTS CALL

UNITED STATES 1-800-346-4175 (LONDONDERRY, NH)

CANADA: 1-800-361-6975 (QUEBEC) 1-800-387-6487 (ALL OTHER PROVINCES)

FOR PRODUCT INFO: http://www.burndy.com

GROUNDING CONNECTOR							
ITEM NO: 26418L							
CAT. NO:GB29G69							
DRAWN BY: PARTHIBAN B	11/5/2013						
CHECKER: L TROMBLEY	11/12/2013						
DSN APRVL: L TROMBLEY 11/12/2013 MFG APRVL: T WAWRZYNIAK 11/12/2013							
						QA APRVL: J HILLMAN	11/11/2013
MKT APRVL: P THERRIEN	11/5/2013						
PROD FAM:		DRAWING	NO	REV			
PROJECT #:	SIZE	E00346	06				
DOCUMENT TYPE: SALES	В	50034696		ΙAΙ			
DELLEVEL Delegged	1)	CULTET 1 O	1				