

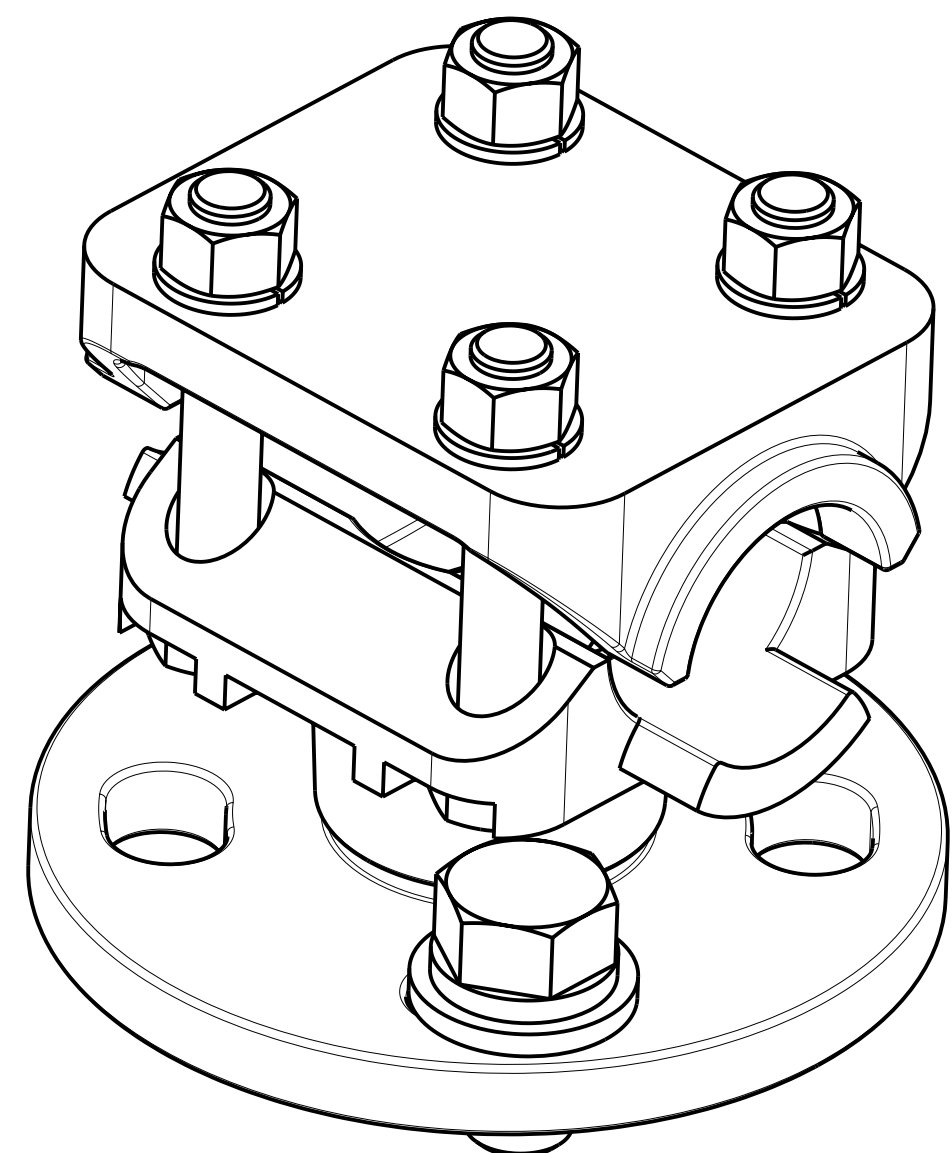


REV	DATE	DESCRIPTION	ECO	BY	C'H'K.
A	07/02/2015 05:30:00 AM	DRAWING RELEASED	40835	MM	NJS

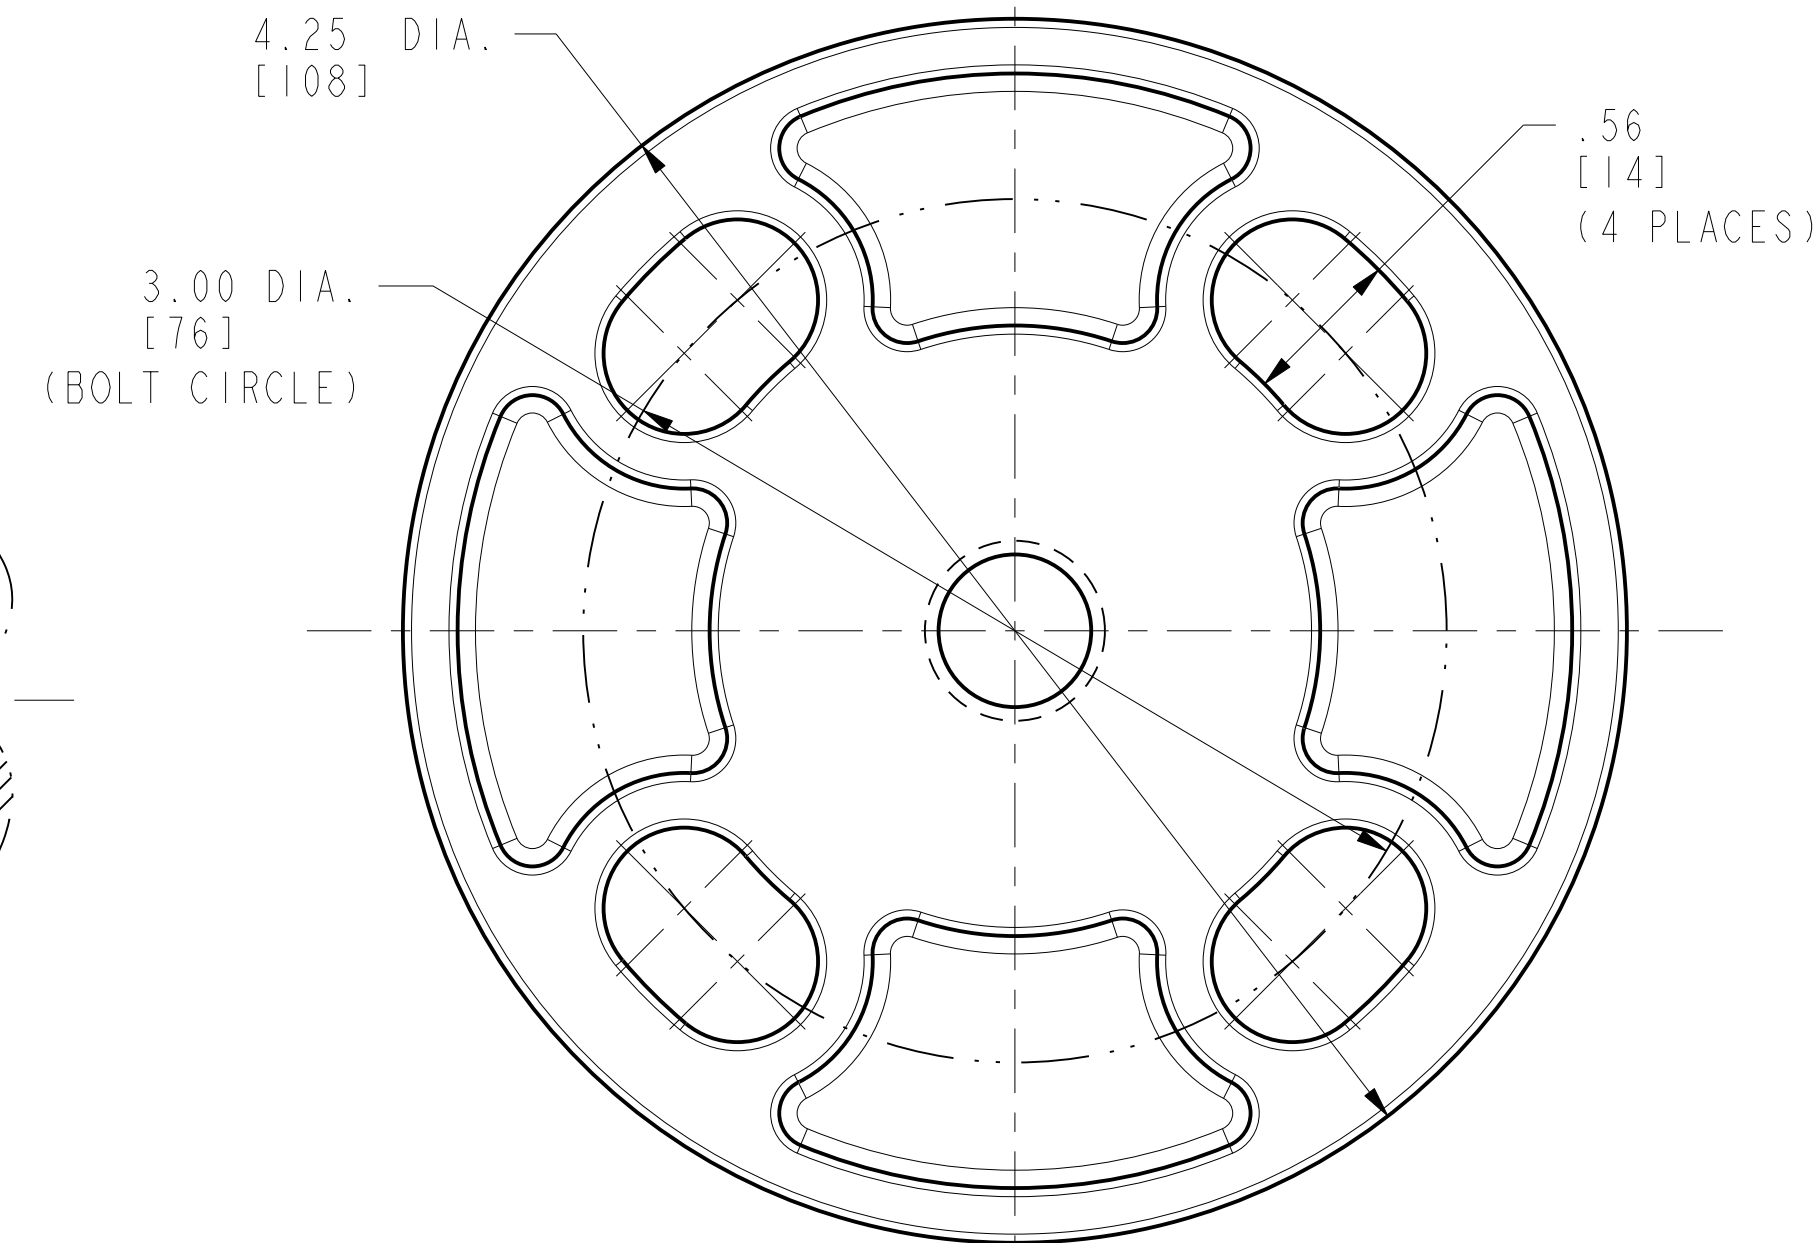



3D VIEW

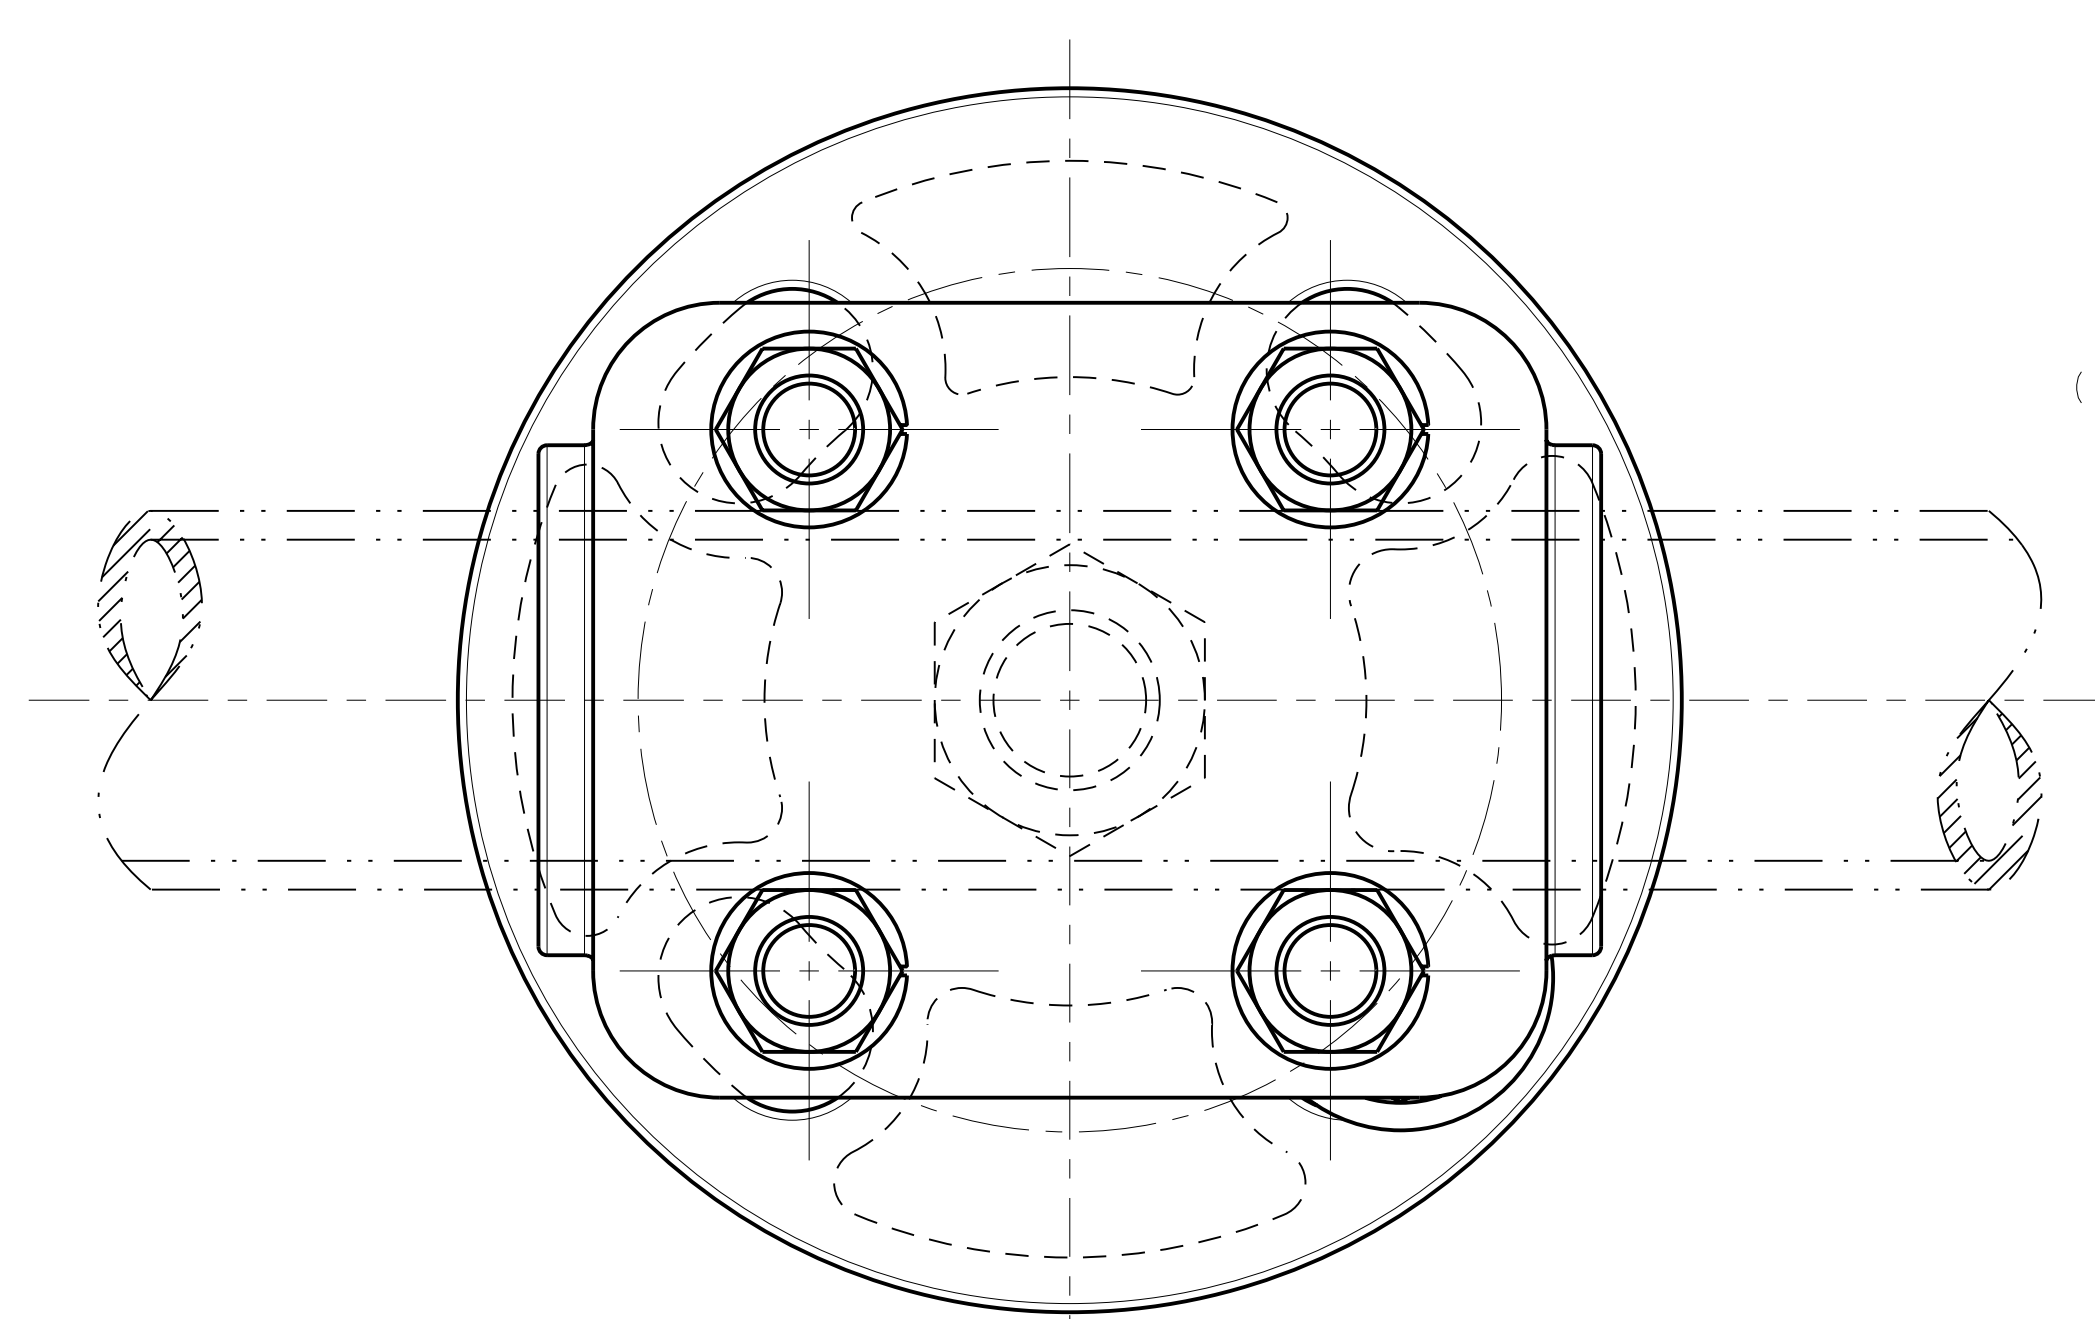

VIEW OF BASE

MOUNTING HARDWARE	4	6	7
	CAP MOUNTING	BASE MOUNTING	
GALVANIZED STEEL HARDWARE KITS	MTG3C4	MTG3B4	
HEX. HEAD BOLT	1/2-13 X 1.00	1/2-13 X 1.50	
SPLIT LOCK WASHER	1/2	1/2	
FLAT WASHER	1/2	1/2	
HEX. NUT	NONE	1/2-13	
QTY EACH	4	4	

4 3/8"-16 HEX. HEAD SILICON BRONZE BOLT, SILICON BRONZE SPLIT LOCK WASHER AND SILICON BRONZE NUT (4 PLACES)

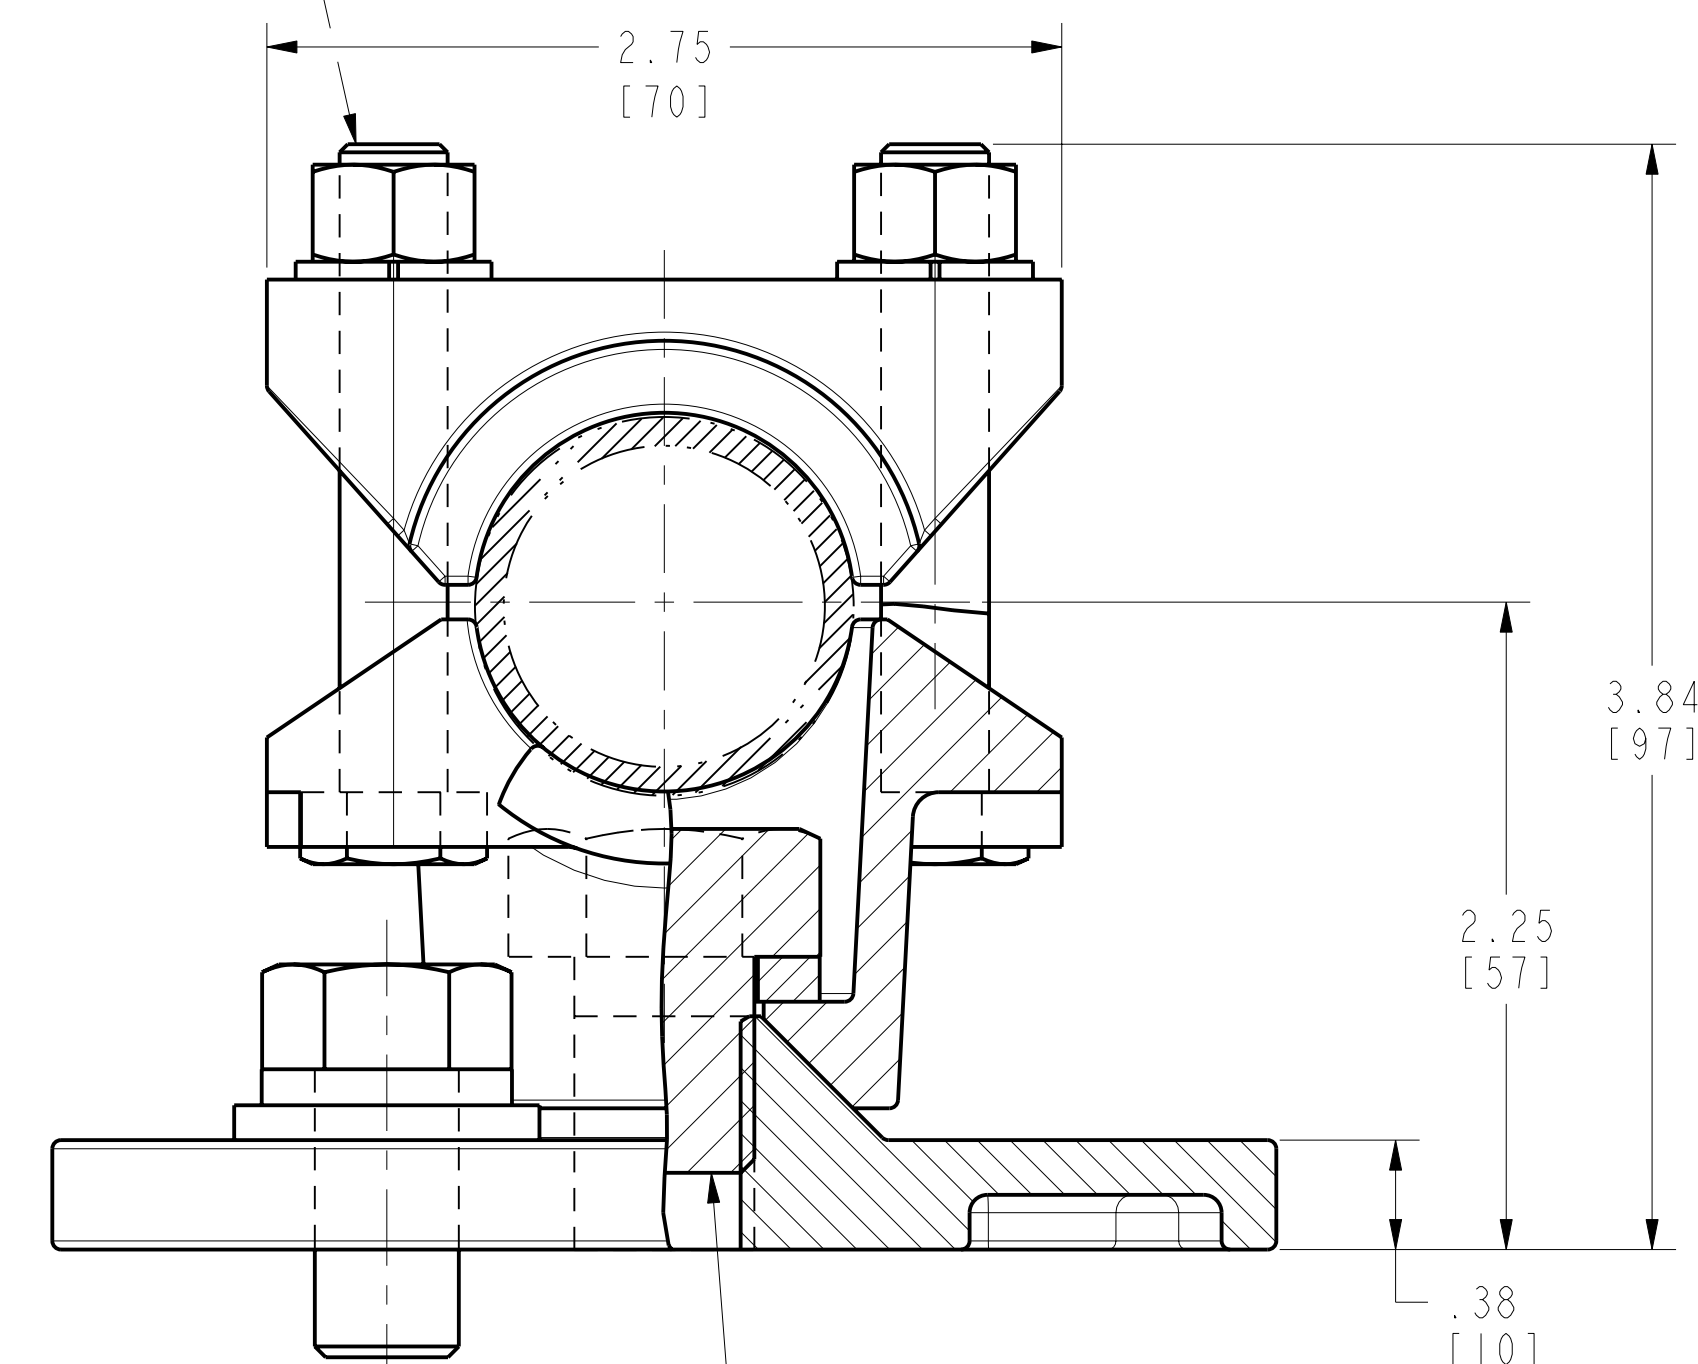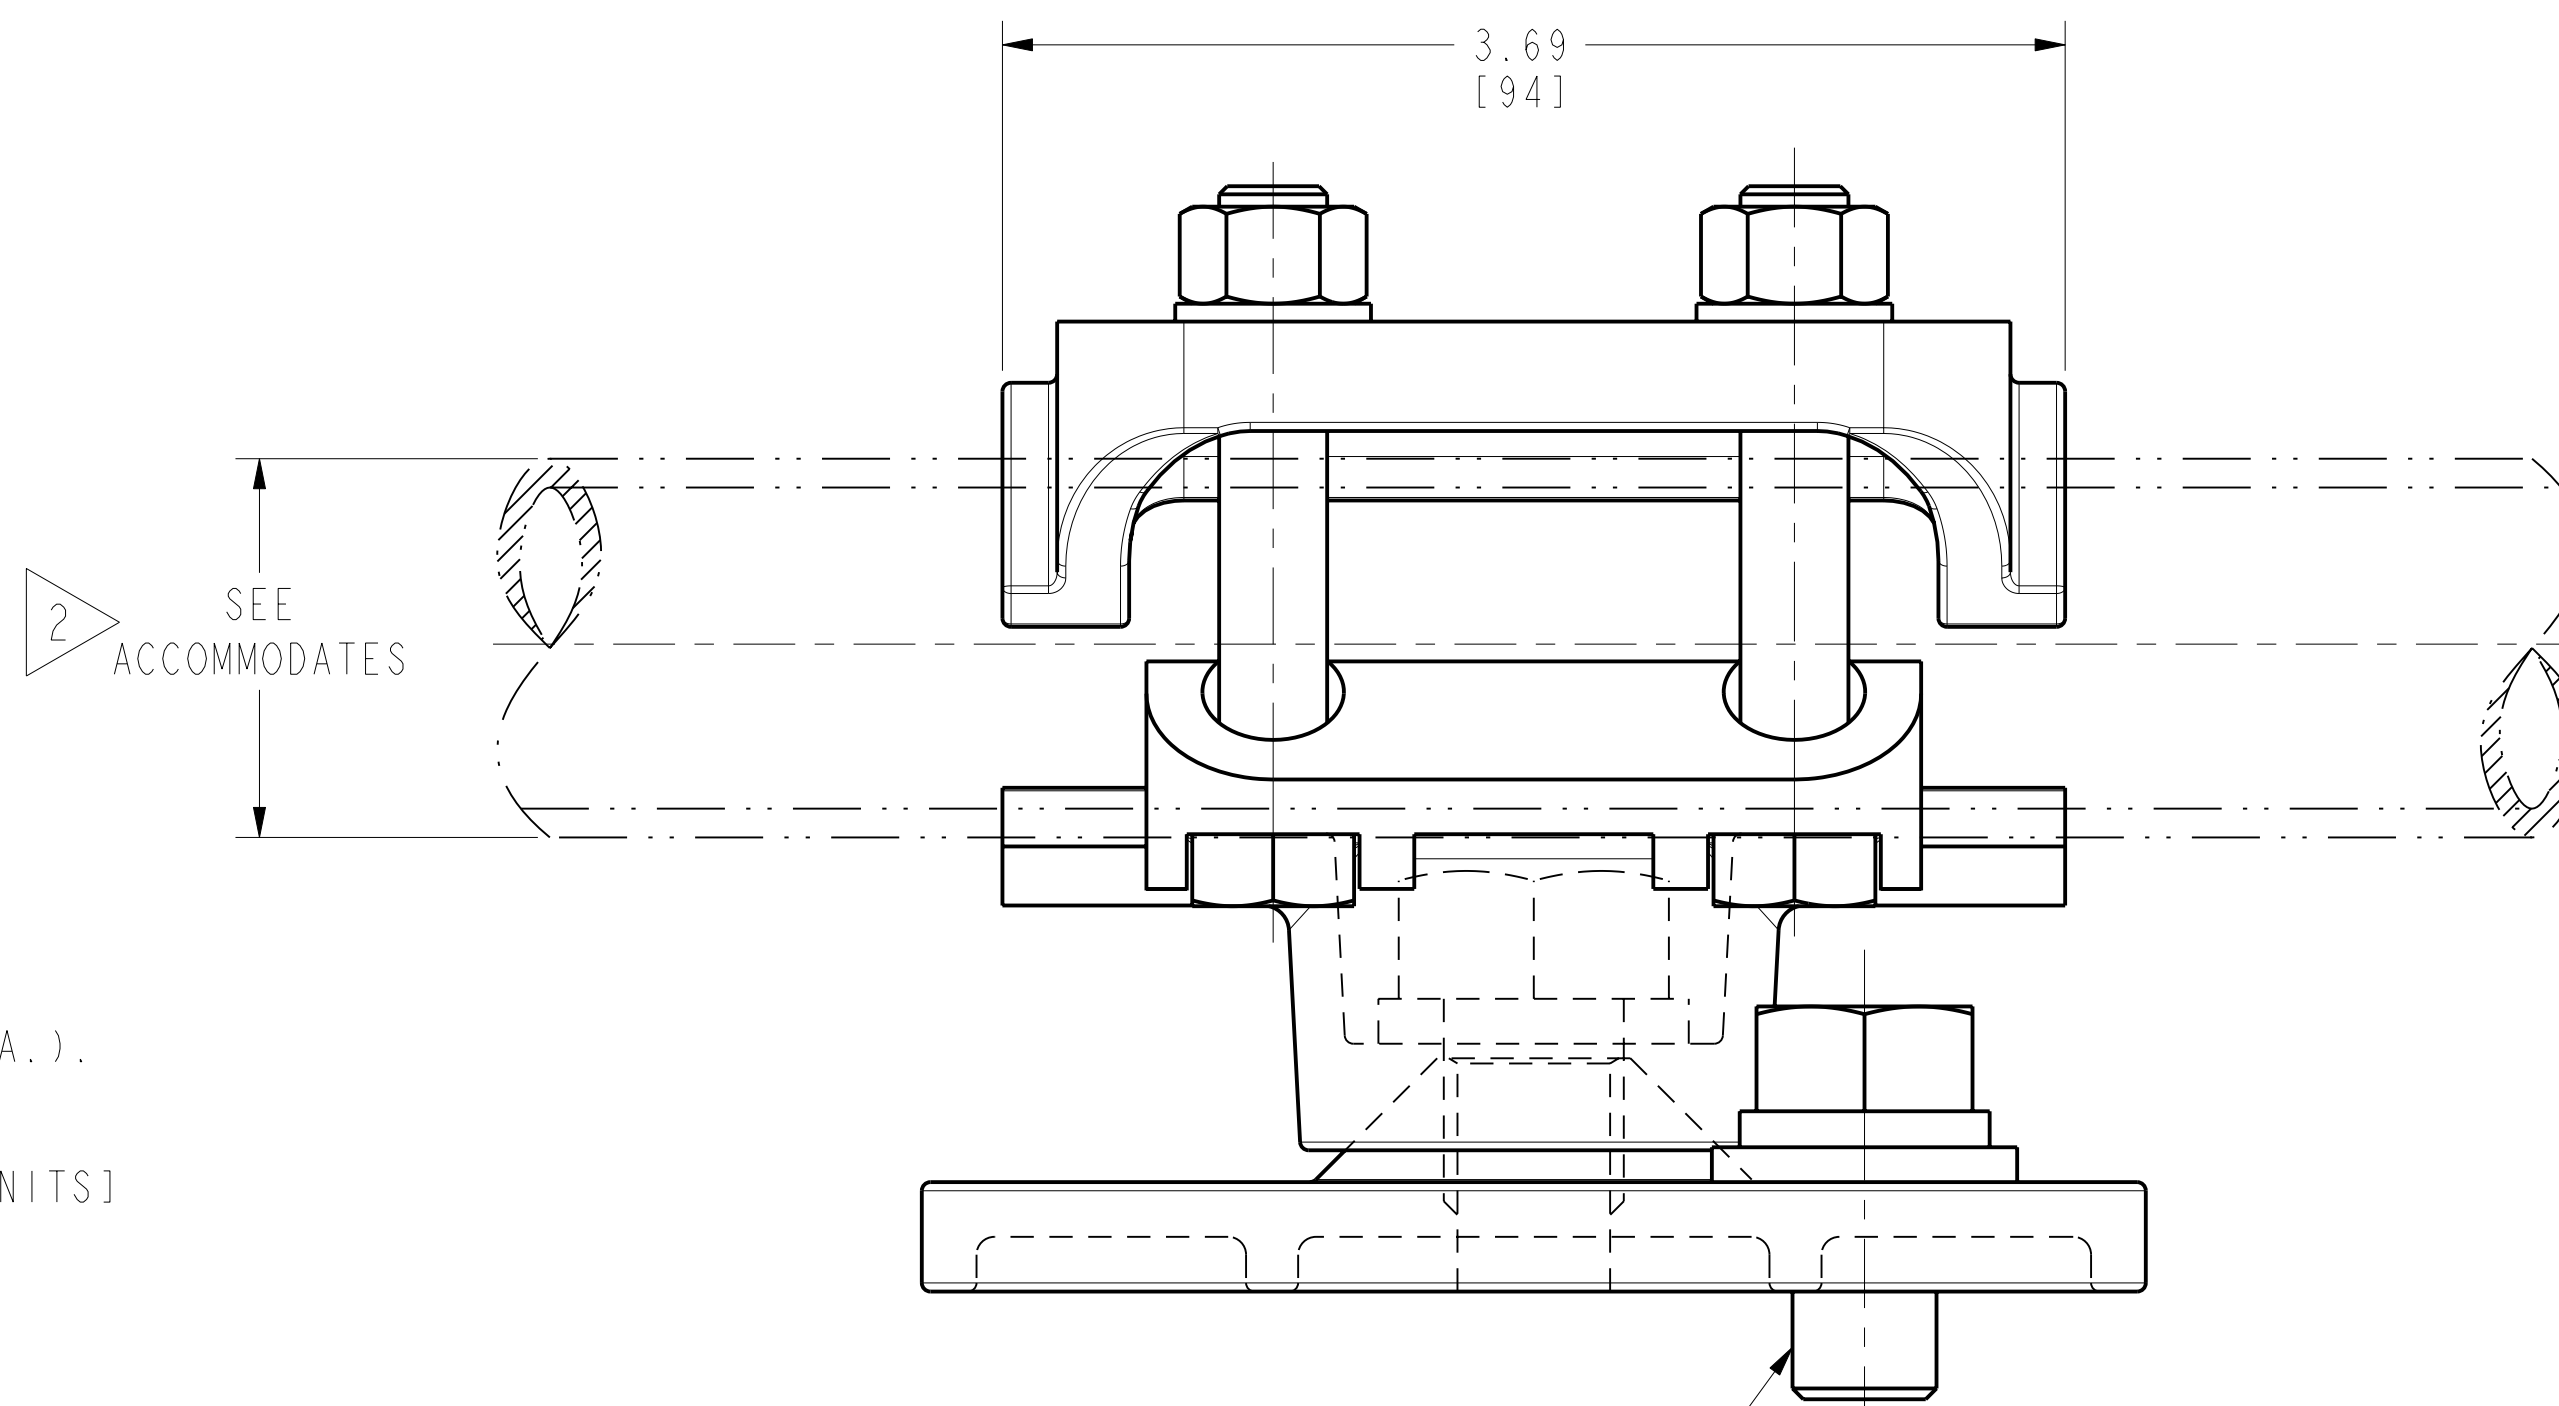

5 5/8"-11 HEX. HEAD SILICON BRONZE BOLT AND SILICON BRONZE SPLIT LOCK WASHER.

NOTES:

- MATERIAL :  
CAST COPPER ALLOY
- ACCOMMODATES:  
4/0 STR. (.528 [13] DIA.) - 1250 Kcmil (1.289 [33] DIA.),  
1/4 IPS (.540 [14] DIA.) - 1 IPS (1.315 [33] DIA.).
- DIMENSIONS IN BRACKETS [ ] DENOTES METRIC UNITS [SI UNITS] AND ARE ROUNDED TO THE NEAREST WHOLE NUMBER, UNLESS OTHERWISE SPECIFIED THESE UNITS SHALL BE USED FOR REFERENCE ONLY.
- INSTALLATION TORQUE:  
3/8" SILICON BRONZE HARDWARE : 240 LB-IN [30 Nm].  
5/8" SILICON BRONZE HARDWARE : 660 LB-IN [75 Nm].  
1/2" GALVANIZED STEEL HARDWARE : 480 LB-IN [55 Nm]
- HEAVY DUTY SINGLE BOLT PERMITS ROTATION TO ANY ANGLE.
- CAP MOUNTING HARDWARE KIT SUPPLIED AS STANDARD (SEE TABLE).
- SPECIFY BASE MOUNTING HARDWARE, IF REQUIRED, BY ADDING SUFFIX "-B" TO THE CATALOG NUMBER. (SEE TABLE)  
EXAMPLE : UHR153CG6B
- MARKING  
BURNDY  
UHR153CG6  
4/0 STR -1250 kcmil AL OR CU  
1/4" -1" IPS PIPE

TO ORDER BURNDY® PRODUCTS CALL		BUS SUPPORT CLAMP	
UNITED STATES 1-800-346-4175 (LONDONDERRY, NH)		ITEM NO: 27009564	CAT. NO: UHR153CG6
CANADA: 1-800-361-6975 (QUEBEC) 1-800-387-6487 (ALL OTHER PROVINCES)		DRAWN BY: M MOHAN 07/06/15	CHECKER: NJ SUDHAKAR 07/06/15
FOR PRODUCT INFO: <a href="http://www.burndy.com">http://www.burndy.com</a>		DSN APPVL: R LAVOIE 07/14/15	MFG APPVL: --
		GA APPVL: J HILLMAN 07/13/15	MKT APPVL: S MOIST 07/10/15
		PROD FAM: SUBSTATION	DRAWING NO: 50061918
		PROJECT #: --	SCALE: 3:2
		DOCUMENT TYPE: Sales	SHEET 1 OF 1
		REL LEVEL: Released	REV: A

