


REV	DATE	DESCRIPTION	EC	BY	CHK.
A	04/05/2021	NEW DRAWING CREATION	210405006822	SS	YR

BURNDY CAT NO.	COLOR CODE	AWG	mm ²	L1	L2	D	D1	D2	RECOMMENDED TOOLING
YF2406IWL	TURQUOISE	24	0.34	.39 [10.0]	.24 [6.0]	.04 [1.1]	.03 [0.80]	.08 [1.9]	YF268CFSL YF261CSKIT WITH YF2610D DIE
YF2408IWL				.47 [12.0]	.32 [8.0]	.04 [1.1]	.03 [0.80]	.08 [1.9]	
YF2206IWL	ORANGE	22	0.5	.47 [12.0]	.24 [6.0]	.05 [1.3]	.04 [1.0]	.10 [2.6]	
YF2208IWL				.55 [14.0]	.32 [8.0]	.05 [1.3]	.04 [1.0]	.10 [2.6]	
YF2210IWL				.63 [16.0]	.39 [10.0]	.05 [1.3]	.04 [1.0]	.10 [2.6]	
YF2212IWL				.71 [18.0]	.47 [12.0]	.05 [1.3]	.04 [1.0]	.10 [2.6]	
YF2006IWL	WHITE	20	0.75	.47 [12.0]	.24 [6.0]	.06 [1.5]	.05 [1.2]	.11 [2.8]	
YF2008IWL				.55 [14.0]	.32 [8.0]	.06 [1.5]	.05 [1.2]	.11 [2.8]	
YF2010IWL				.63 [16.0]	.39 [10.0]	.06 [1.5]	.05 [1.2]	.11 [2.8]	
YF2012IWL				.71 [18.0]	.47 [12.0]	.06 [1.5]	.05 [1.2]	.11 [2.8]	
YF1806IWL	YELLOW	18	1	.47 [12.0]	.24 [6.0]	.07 [1.7]	.06 [1.4]	.12 [3.0]	
YF1808IWL				.55 [14.0]	.32 [8.0]	.07 [1.7]	.06 [1.4]	.12 [3.0]	
YF1810IWL				.63 [16.0]	.39 [10.0]	.07 [1.7]	.06 [1.4]	.12 [3.0]	
YF1812IWL				.71 [18.0]	.47 [12.0]	.07 [1.7]	.06 [1.4]	.12 [3.0]	
YF1818IWL				.94 [24.0]	.71 [18.0]	.07 [1.7]	.06 [1.4]	.12 [3.0]	

BURNDY CAT NO.	COLOR CODE	AWG	mm ²	L1	L2	D	D1	D2	RECOMMENDED TOOLING
YF1606IWL*	RED	16	1.5	.47 [12.0]	.24 [6.0]	0.08 [2.0]	.07 [1.7]	.14 [3.5]	YF268CFSL YF261CSKIT WITH YF2610D DIE
YF1608IWL				.55 [14.0]	.32 [8.0]	0.08 [2.0]	.07 [1.7]	.14 [3.5]	
YF1610IWL				.63 [16.0]	.39 [10.0]	0.08 [2.0]	.07 [1.7]	.14 [3.5]	
YF1612IWL				.71 [18.0]	.47 [12.0]	0.08 [2.0]	.07 [1.7]	.14 [3.5]	
YF1618IWL				.94 [24.0]	.71 [18.0]	0.08 [2.0]	.07 [1.7]	.14 [3.5]	
YF1408IWL	BLUE	14	2.5	.55 [14.0]	.32 [8.0]	0.10 [2.5]	.09 [2.2]	.17 [4.2]	
YF1410IWL				.63 [16.0]	.39 [10.0]	0.10 [2.5]	.09 [2.2]	.17 [4.2]	
YF1412IWL				.71 [18.0]	.47 [12.0]	0.10 [2.5]	.09 [2.2]	.17 [4.2]	
YF1418IWL				.94 [24.0]	.71 [18.0]	0.10 [2.5]	.09 [2.2]	.17 [4.2]	
YF1209IWL*	GRAY	12	4	.67 [17.0]	.35 [9.0]	0.13 [3.2]	.11 [2.8]	.19 [4.8]	
YF1210IWL				.67 [17.0]	.39 [10.0]	0.13 [3.2]	.11 [2.8]	.19 [4.8]	
YF1212IWL				.79 [20.0]	.47 [12.0]	0.13 [3.2]	.11 [2.8]	.19 [4.8]	
YF1218IWL				1.02 [26.0]	.71 [18.0]	0.13 [3.2]	.11 [2.8]	.19 [4.8]	

NOTES:

1. MATERIAL: COPPER.
2. FINISH : TIN PLATED
3. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS ROUNDED OFF TO THE NEAREST MILLIMETER, UNLESS OTHERWISE SPECIFIED AND ARE FOR REFERENCE ONLY.
4. UL LISTED BARE AND COVERED FERRULES PER UL486F REQUIREMENTS.
5. ITEMS WITH CATALOG NUMBERS FOLLOWED BY ASTERISKS (*) ARE NOT UL LISTED.

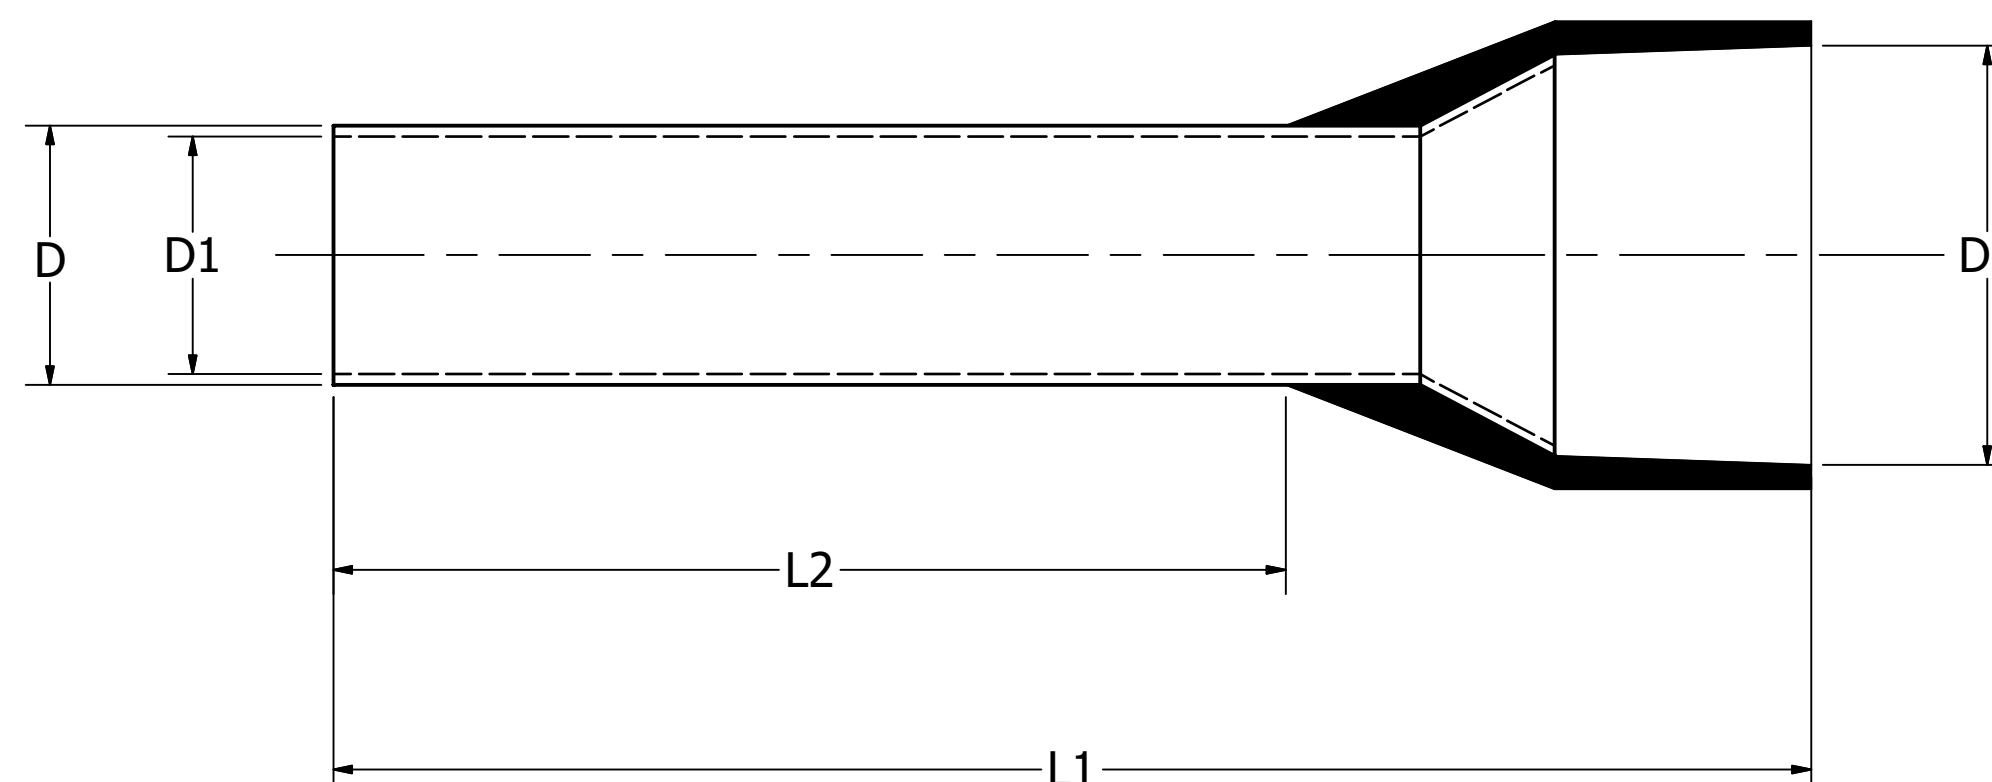

TO ORDER BURNDY® PRODUCTS CALL UNITED STATES 1-800-346-4175 (LONDONDERRY, NH) CANADA: 1-800-387-6487 FOR PRODUCT INFO: http://www.burndy.com	INSULATED FERRULES	
	ITEM NO: SEE TABLE CAT. NO: SEE TABLE DRAWN BY: M.SAURABH 12/07/2020 CHECKER: K.HERNANDEZ 10/18/2022 DSN APRVL: K.HERNANDEZ 10/18/2022 MFG APRVL: -- QA APRVL: J.BRODEUR 05/10/2021 MKT APRVL: A.FITZGER 05/12/2021 PROD FAM: --	
PROJECT #: -- DOCUMENT TYPE: SALES REL LEVEL: Released	SIZE D	DRAWING NO 50111876 SHEET 1 OF 6
		REV A

REV	DATE	DESCRIPTION	EC	BY	C'H'K.
A	04/05/2021	NEW DRAWING CREATION	210405006822	SS	YR

BURNDY CAT NO.	COLOR CODE	AWG	mm ²	L1	L2	D	D1	D2	RECOMMENDED TOOLING	BURNDY CAT NO.	COLOR CODE	AWG	mm ²	L1	L2	D	D1	D2	RECOMMENDED TOOLING								
YF1010IWL*	BLACK	10	6	.71	.39	0.15	.14	.25	YF268CFSL	YF2208IDL	WHITE	22	0.5	.55	.31	0.05	.04	.10	YF268CFSL								
YF1012IWL				[18.0]	[10.0]		[3.5]	[6.3]	YF261CSKIT WITH	YF2210IDL				[14.0]	[8.0]		[1.0]	[2.6]		YF261OD DIE	YF2212IDL	[16.0]	[10.0]	[1.3]	[1.0]	[2.6]	
YF1018IWL				[20.0]	[12.0]		[3.5]	[6.3]	YF261OD DIE	YF2212IDL				[18.0]	[12.0]		[1.0]	[2.6]									
YF0812IWL	IVORY	8	10	.87	.47	0.19	.18	.30	YF268CFSL	YF2006IDL	GRAY	20	0.75	.47	.24	0.06	.05	.11	YF268CFSL								
YF0818IWL				[22.0]	[12.0]		[4.9]	[4.5]	[7.6]	YF261CSKIT WITH				YF2008IDL	[12.0]		[6.0]	[1.2]		[2.8]	YF261OD DIE	YF2010IDL	[14.0]	[8.0]	[1.5]	[1.2]	[2.8]
YF0612IWL	GREEN	6	16	.94	.47	0.24	.23	.35	YF261CSKIT WITH	YF2010IDL				GRAY	20		0.75	.63		.40	0.06	.05	.11	YF261CSKIT			
YF0618IWL				[24.0]	[12.0]		[6.2]	[5.8]		[8.8]	YF2012IDL	[16.0]	[10.0]			[1.5]		[1.2]	[2.8]	WITH YF261OD		YF2018IDL	[18.0]		[12.0]	[1.2]	[2.8]
YF0412IWL*	BROWN	4	25	1.02	.47	0.30	.29	.44		YF864D DIE	YF1806IDL	RED	18			1		.47	.24	0.07		.06	.12		YF268CFSL		
YF0415IWL*				[26.0]	[12.0]		[7.3]	[11.2]	YF1808IDL		[12.0]			[6.0]	[1.4]		[3.0]	YF1810IDL	[14.0]		[8.0]	[1.4]	[3.0]	[1.4]		[3.0]	YF261CSKIT WITH
YF0416IWL				[29.0]	[15.0]		[7.3]	[11.2]	YF1810IDL		[16.0]			[10.0]	[1.7]		[1.4]	[3.0]	YF1812IDL		[18.0]	[12.0]	[1.4]	[3.0]		[1.4]	[3.0]
YF0218IWL	BEIGE	2	35	1.26	.71	0.34	.33	.50		YF1818IDL				.94	.71		.06	.12									
YF2205IDL*	WHITE	22	0.5	.43	.20	0.05	.04	.10	YF268CFSL					[11.0]	[5.0]	0.05	[1.0]	[2.6]	YF261CSKIT WITH								
YF2206IDL				[12.0]	[6.0]		[1.3]	[1.0]	[2.6]	YF261OD DIE								[12.0]	[6.0]	[1.0]	[2.6]	YF261OD DIE					

NOTES:

- MATERIAL: COPPER.
- FINISH : TIN PLATED
- DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS ROUNDED OFF TO THE NEAREST MILLIMETER, UNLESS OTHERWISE SPECIFIED AND ARE FOR REFERENCE ONLY.
- UL LISTED BARE AND COVERED FERRULES PER UL486F REQUIREMENTS.
- ITEMS WITH CATALOG NUMBERS FOLLOWED BY ASTERISKS (*) ARE NOT UL LISTED.

TO ORDER BURNDY® PRODUCTS CALL		INSULATED FERRULES	
UNITED STATES 1-800-346-4175 (LONDONDERRY, NH)		ITEM NO: SEE TABLE	
CANADA: 1-800-387-6487		CAT. NO: SEE TABLE	
FOR PRODUCT INFO: http://www.burndy.com		DRAWN BY: M.SAURABH 12/07/2020	
		CHECKER: K.HERNANDEZ 10/18/2022	
		DSN APRVL: K.HERNANDEZ 10/18/2022	
		MFG APRVL: --	
		QA APRVL: J.BRODEUR 05/10/2021	
		MKT APRVL: A.FITZGER 05/12/2021	
		PROD FAM: --	
		PROJECT #: --	
		SIZE	
		D	
		DRAWING NO	
		50111876	
		SHEET 2 OF 6	
		REV	
		A	



REV	DATE	DESCRIPTION	EC	BY	C'H'K.
A	04/05/2021	NEW DRAWING CREATION	210405006822	SS	YR

BURNDY CAT NO.	COLOR CODE	AWG	mm ²	L1	L2	D	D1	D2	RECOMMENDED TOOLING	BURNDY CAT NO.	COLOR CODE	AWG	mm ²	L1	L2	D	D1	D2	RECOMMENDED TOOLING	
YF1606IDL*	BLACK	16	1.5	.47	.24	.08 [2.0]	.07	.14	YF268CFSL	YF1010IDL*	YELLOW	10	6	.71	.39	.15 [3.9]	.14	.25	YF261CSKIT WITH YF2610D DIE	
YF1608IDL				[12.0]	[6.0]		[1.7]	[3.5]		.79				.47	.14		.25			
YF1610IDL				[14.0]	[8.0]		[1.7]	[3.5]		1.02				.71	.14		.25			
YF1612IDL				[16.0]	[10.0]		[1.7]	[3.5]		.87				.47	.18		.30			
YF1615IDL				[18.0]	[12.0]		[1.7]	[3.5]		.98				.59	.18		.30			
YF1618IDL				[21.0]	[15.0]		[1.7]	[3.5]		1.10				.71	.18		.30			
YF1408IDL	BLUE	14	2.5	.55	.31	.10 [2.5]	.09	.17	YF261CSKIT WITH YF2610D DIE	YF0812IDL	RED	8	10	[14.0]	[8.0]	[2.2]	[4.2]	.18	.30	YF268CFSL
YF1410IDL				[16.0]	[10.0]		[2.2]	[4.2]		.94				.47	.23	.35				
YF1412IDL				[18.0]	[12.0]		[2.2]	[4.2]		1.10				.71	.23	.35				
YF1418IDL				[24.0]	[18.0]		[2.2]	[4.2]		1.02				.47	.29	.44				
YF1209IDL*	GRAY	12	4	.67	.35	.13 [3.2]	.11	.19	YF261CSKIT WITH YF864D DIE	YF0412IDL*	YELLOW	4	25	[17.0]	[9.0]	[2.8]	[4.8]	.29	.44	YF261CSKIT WITH YF864D DIE
YF1210IDL				[17.0]	[10.0]		[2.8]	[4.8]		1.14				.59	.29	.44				
YF1212IDL				[20.0]	[12.0]		[2.8]	[4.8]		1.18				.63	.29	.44				
YF1218IDL				[26.0]	[18.0]		[2.8]	[4.8]		1.26				.71	.29	.44				
										YF0422IDL				1.42	.87	.29	.44			
										YF0425IDL				1.54	.98	.29	.44			

NOTES:

1. MATERIAL: COPPER.
2. FINISH : TIN PLATED
3. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS ROUNDED OFF TO THE NEAREST MILLIMETER, UNLESS OTHERWISE SPECIFIED AND ARE FOR REFERENCE ONLY.
4. UL LISTED BARE AND COVERED FERRULES PER UL486F REQUIREMENTS.
5. ITEMS WITH CATALOG NUMBERS FOLLOWED BY ASTERISKS (*) ARE NOT UL LISTED.


TO ORDER BURNDY® PRODUCTS CALL UNITED STATES 1-800-346-4175 (LONDONDERRY, NH) CANADA: 1-800-387-6487 FOR PRODUCT INFO: http://www.burndy.com	INSULATED FERRULES	
	ITEM NO: SEE TABLE	
	CAT. NO: SEE TABLE	
	DRAWN BY: M.SAURABH	12/07/2020
	CHECKER: K.HERNANDEZ	10/18/2022
	DSN APRVL: K.HERNANDEZ	10/18/2022
	MFG APRVL: --	
	QA APRVL: J.BRODEUR	05/10/2021
	MKT APRVL: A.FITZGER	05/12/2021
	PROD FAM: --	
PROJECT #: --	SIZE	DRAWING NO
DOCUMENT TYPE: SALES	D	50111876
REL LEVEL: Released		SHEET 3 OF 6
		A

REV	DATE	DESCRIPTION	EC	BY	CHK.
A	04/05/2021	NEW DRAWING CREATION	210405006822	SS	YR

BURNDY CAT NO.	COLOR CODE	AWG	mm ²	L1	L2	D	D1	D2	RECOMMENDED TOOLING	BURNDY CAT NO.	COLOR CODE	AWG	mm ²	L1	L2	D	D1	D2	RECOMMENDED TOOLING
YF0216IDL	RED	2	35	1.18	.63	.34	.32	0.50	YF261CSKIT WITH YF21D DIE	YF2/020IDL*	YELLOW	2/0	70	1.46	.83	.56	.53	.63	--
YF0218IDL				[30.0]	[16.0]		[8.3]	[12.7]		[13.5]				[16.0]					
YF0222IDL				1.26	.71		.32	0.50		[41.0]				[25.0]	[13.5]		[16.0]		
YF0225IDL				[32.0]	[18.0]		[8.3]	[12.7]		1.42	.87	.32	0.50	1.73	28.0	.53	.63	[44.0]	[13.5]
YF0112IDL*	BLUE	1	50	1.10	.47	.43	.41	.59	81KFT SERIES YF261CSKIT WITH YF21D DIE	YF2406ITL	PINK	24	0.34	.39	.24	.04	.03	.08	YF268CFSL YF261CSKIT WITH YF2610D DIE
YF0116IDL*				[28.0]	[12.0]		[10.3]	[15.0]		[10.3]				[15.0]	[0.80]		[1.9]		
YF0120IDL*				1.26	.63		.41	.59		[12.0]	[8.0]	[1.1]	.03	.08					
YF0122IDL*				[32.0]	[16.0]		[10.3]	[15.0]		.47	.24	.05	.04	.10					
YF0125IDL*				1.42	.79		.41	.59		[12.0]	[6.0]		[1.0]	[2.6]					
YF1/012IDL*		[36.0]	[20.0]	[10.3]	[15.0]	.55	.32	[1.3]	.04	.10									
YF1/016IDL*		1.46	.83	.41	.59	[14.0]	[8.0]		[1.0]	[2.6]									
YF1/020IDL		[37.0]	[21.0]	[10.3]	[15.0]	.63	.39	.06	.04	.10									
YF1/022IDL		1.57	.98	.41	.59	[16.0]	[10.0]		[1.0]	[2.6]									
YF1/025IDL		[40]	[25.0]	[10.3]	[15.0]	.71	.47	[1.5]	.05	.11									
YF1/012IDL*	1.10	.47	.41	.59	[18.0]	[12.0]	[1.0]		[2.6]										
YF1/016IDL*	[28.0]	[12.0]	[10.3]	[15.0]	.47	.24	0.06	.05	.11										
YF1/020IDL	1.26	.63	.41	.59	[12.0]	[6.0]		[1.2]	[2.8]										
YF1/022IDL	[32.0]	[16.0]	[10.3]	[15.0]	.55	.32	[1.5]	.05	.11										
YF1/025IDL	1.42	.79	.41	.59	[14.0]	[8.0]		[1.2]	[2.8]										
	[36.0]	[20.0]	[10.3]	[15.0]	.63	.39	.06	.05	.11										
	1.46	.83	.41	.59	[16.0]	[10.0]		[1.2]	[2.8]										
	[37.0]	[21.0]	[10.3]	[15.0]	.71	.47	[1.5]	.05	.11										
	1.57	.98	.41	.59	[18.0]	[12.0]		[1.2]	[2.8]										
	[40.0]	[25.0]	[10.3]	[15.0]															

NOTES:

1. MATERIAL: COPPER.
2. FINISH : TIN PLATED
3. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS ROUNDED OFF TO THE NEAREST MILLIMETER, UNLESS OTHERWISE SPECIFIED AND ARE FOR REFERENCE ONLY.
4. UL LISTED BARE AND COVERED FERRULES PER UL486F REQUIREMENTS.
5. ITEMS WITH CATALOG NUMBERS FOLLOWED BY ASTERISKS (*) ARE NOT UL LISTED.

TO ORDER BURNDY® PRODUCTS CALL UNITED STATES 1-800-346-4175 (LONDONDERRY, NH) CANADA: 1-800-387-6487 FOR PRODUCT INFO: http://www.burndy.com	INSULATED FERRULES	
	ITEM NO: SEE TABLE	
	CAT. NO: SEE TABLE	
	DRAWN BY: M.SAURABH	12/07/2020
	CHECKER: K.HERNANDEZ	10/18/2022
	DSN APRVL: K.HERNANDEZ	10/18/2022
	MFG APRVL: --	
	QA APRVL: J.BRODEUR	05/10/2021
	MKT APRVL: A.FITZGER	05/12/2021
	PROD FAM: --	
PROJECT #: --	SIZE	
DOCUMENT TYPE: SALES	D	
REL LEVEL: Released		
		
DRAWING NO		
50111876		
SHEET 4 OF 6		
REV		
A		

REV	DATE	DESCRIPTION	EC	BY	C'H'K.
A	04/05/2021	NEW DRAWING CREATION	210405006822	SS	YR

BURNDY CAT NO.	COLOR CODE	AWG	mm ²	L1	L2	D	D1	D2	RECOMMENDED TOOLING
YF1806ITL	RED	18	1	.47 [12.0]	.24 [6.0]	.07 [1.7]	.06 [1.4]	3.0 [1.12]	YF268CFSL YF261CSKIT WITH YF2610D DIE
YF1808ITL				.55 [14.0]	.32 [8.0]		.06 [1.4]	3.0 [1.12]	
YF1810ITL				.63 [16.0]	.39 [10.0]		.06 [1.4]	3.0 [1.12]	
YF1812ITL				.71 [18.0]	.47 [12.0]		.06 [1.4]	3.0 [1.12]	
YF1818ITL				.94 [24.0]	.71 [18.0]		.06 [1.4]	3.0 [1.12]	
YF1606ITL*				BLACK	16		1.5	.47 [12.0]	
YF1608ITL	.55 [14.0]	.32 [8.0]	.07 [1.7]			.14 [3.5]			
YF1610ITL	.63 [16.0]	.39 [10.0]	.07 [1.7]			.14 [3.5]			
YF1612ITL	.71 [18.0]	.47 [12.0]	.07 [1.7]			.14 [3.5]			
YF1618ITL	.94 [24.0]	.71 [18.0]	.07 [1.7]			.14 [3.5]			
YF1408ITL	GRAY	14	2.5			.55 [14.0]		.32 [8.0]	.10 [2.6]
YF1410ITL				.63 [16.0]	.39 [10.0]	.09 [2.2]	.17 [4.2]		
YF1412ITL				.71 [18.0]	.47 [12.0]	.09 [2.2]	.17 [4.2]		
YF1418ITL				.94 [24.0]	.71 [18.0]	.09 [2.2]	.17 [4.2]		

BURNDY CAT NO.	COLOR CODE	AWG	mm ²	L1	L2	D	D1	D2	RECOMMENDED TOOLING	
YF1209ITL*	ORANGE	12	4	.67 [17.0]	.35 [9.0]	.13 [3.2]	.11 [2.8]	.19 [4.8]	YF268CFSL YF261CSKIT WITH YF2610D DIE	
YF1210ITL				.67 [17.0]	.39 [10.0]		.11 [2.8]	.19 [4.8]		
YF1212ITL				.79 [20.0]	.47 [12.0]		.11 [2.8]	.19 [4.8]		
YF1218ITL				1.02 [26.0]	.71 [18.0]		.11 [2.8]	.19 [4.8]		
YF1010ITL*				GREEN	10		6	.71 [18.0]		.39 [10.0]
YF1012ITL	.79 [20.0]	.47 [12.0]	.14 [3.5]			.24 [6.3]				
YF1018ITL	1.02 [26.0]	.71 [18.0]	.14 [3.5]			.24 [6.3]				
YF0812ITL	BROWN	8	10	.87 [22.0]	.47 [12.0]	.19 [4.9]	.18 [4.5]	.30 [7.6]		YF268CFSL YF261CSKIT WITH YF864D DIE
YF0818ITL				1.10 [28.0]	.71 [18.0]		.18 [4.5]	.30 [7.6]		
YF0612ITL	IVORY	6	16	.94 [24.0]	.47 [12.0]	.24 [6.2]	.23 [5.8]	.35 [8.8]		YF261CSKIT WITH YF864D DIE
YF0618ITL				1.10 [28.0]	.71 [18.0]		.23 [5.8]	.35 [8.8]		
YF0416ITL	BLACK	4	25	1.18 [30.0]	.63 [16.0]	.30 [7.7]	.29 [7.3]	.44 [11.2]		
YF0218ITL	RED	2	35	1.26 [32.0]	.71 [18.0]	.34 [8.7]	.33 [8.3]	.5 [12.7]	YF261CSKIT WITH YF21D DIE	

NOTES:

1. MATERIAL: COPPER.
2. FINISH : TIN PLATED
3. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS ROUNDED OFF TO THE NEAREST MILLIMETER, UNLESS OTHERWISE SPECIFIED AND ARE FOR REFERENCE ONLY.
4. UL LISTED BARE AND COVERED FERRULES PER UL486F REQUIREMENTS.
5. ITEMS WITH CATALOG NUMBERS FOLLOWED BY ASTERISKS (*) ARE NOT UL LISTED.


TO ORDER BURNDY® PRODUCTS CALL UNITED STATES 1-800-346-4175 (LONDONDERRY, NH) CANADA: 1-800-387-6487 FOR PRODUCT INFO: http://www.burndy.com	INSULATED FERRULES			
	ITEM NO: SEE TABLE			
	CAT. NO: SEE TABLE			
	DRAWN BY: M.SAURABH 12/07/2020		CHECKER: K.HERNANDEZ 10/18/2022	
	DSN APRVL: K.HERNANDEZ 10/18/2022		MFG APRVL: --	
	QA APRVL: J.BRODEUR 05/10/2021		MKT APRVL: A.FITZGER 05/12/2021	
	PROD FAM: --		DRAWING NO	
	PROJECT #: --		SIZE	
	DOCUMENT TYPE: SALES		D	
	REL LEVEL: Released		SHEET 5 OF 6	



50111876
A

BURNDY CAT NO.	COLOR CODE	AWG	mm ²	L1	L2	D	D1	D2	E	RECOMMENDED TOOLING
YFTW2208DL	WHITE	22	0.5	.59 [15.0]	.32 [8.0]	.07 [1.8]	.06 [1.5]	.19 [4.7]	.10 [2.5]	YF268CFSL YF261CSKIT WITH YF2610D DIE
YFTW2008DL	GRAY	20	0.8	.59 [15.0]	.32 [8.0]	.08 [2.1]	.07 [1.8]	.20 [5.0]	.11 [2.8]	
YFTW2010DL				.67 [17.0]	.39 [10.0]		.07 [1.8]	.20 [5.0]	.11 [2.8]	
YFTW1808DL	RED	18	1	.59 [15.0]	.32 [8.0]	.09 [2.4]	.08 [2.05]	.21 [5.4]	.13 [3.4]	
YFTW1810DL				.67 [17.0]	.39 [10.0]		.08 [2.05]	.21 [5.4]	.13 [3.4]	
YFTW1608DL	BLACK	16	1.5	.63 [16.0]	.32 [8.0]	0.10 [2.6]	.09 [2.2]	.26 [6.6]	.14 [3.6]	
YFTW1612DL				.79 [20.0]	.47 [12.0]		.09 [2.2]	.26 [6.6]	.14 [3.6]	
YFTW1410DL	BLUE	14	2.5	.73 [18.5]	.39 [10.0]	.127 [3.2]	.11 [2.8]	.31 [7.8]	.17 [4.2]	
YFTW1413DL	BLUE			.85 [21.5]	.51 [13.0]		0.13 [3.3]	.11 [2.8]	.31 [7.8]	
YFTW1212DL	GRAY	12	4	.91 [23.0]	.47 [12.0]	.17 [4.2]	.15 [3.7]	.35 [8.8]	.19 [4.9]	
YFTW1014DL	YELLOW	10	6	1.02 [26.0]	.55 [14.0]	.21 [5.3]	.19 [4.8]	.39 [10.0]	.27 [6.9]	YF261CSKIT WITH YF2610D DIE
YFTW0814DL	RED	8	10	1.02 [26.0]	.55 [14.0]	.27 [6.8]	.25 [6.4]	.51 [13.0]	.28 [7.2]	YF261CSKIT WITH YF864D DIE
YFTW0614DL	BLUE	6	16	1.18 [30.0]	.55 [14.0]	.34 [8.7]	.33 [8.3]	.72 [18.4]	.38 [9.6]	

REV	DATE	DESCRIPTION	EC	BY	C'H'K.
A	04/05/2021	NEW DRAWING CREATION	210405006822	SS	YR

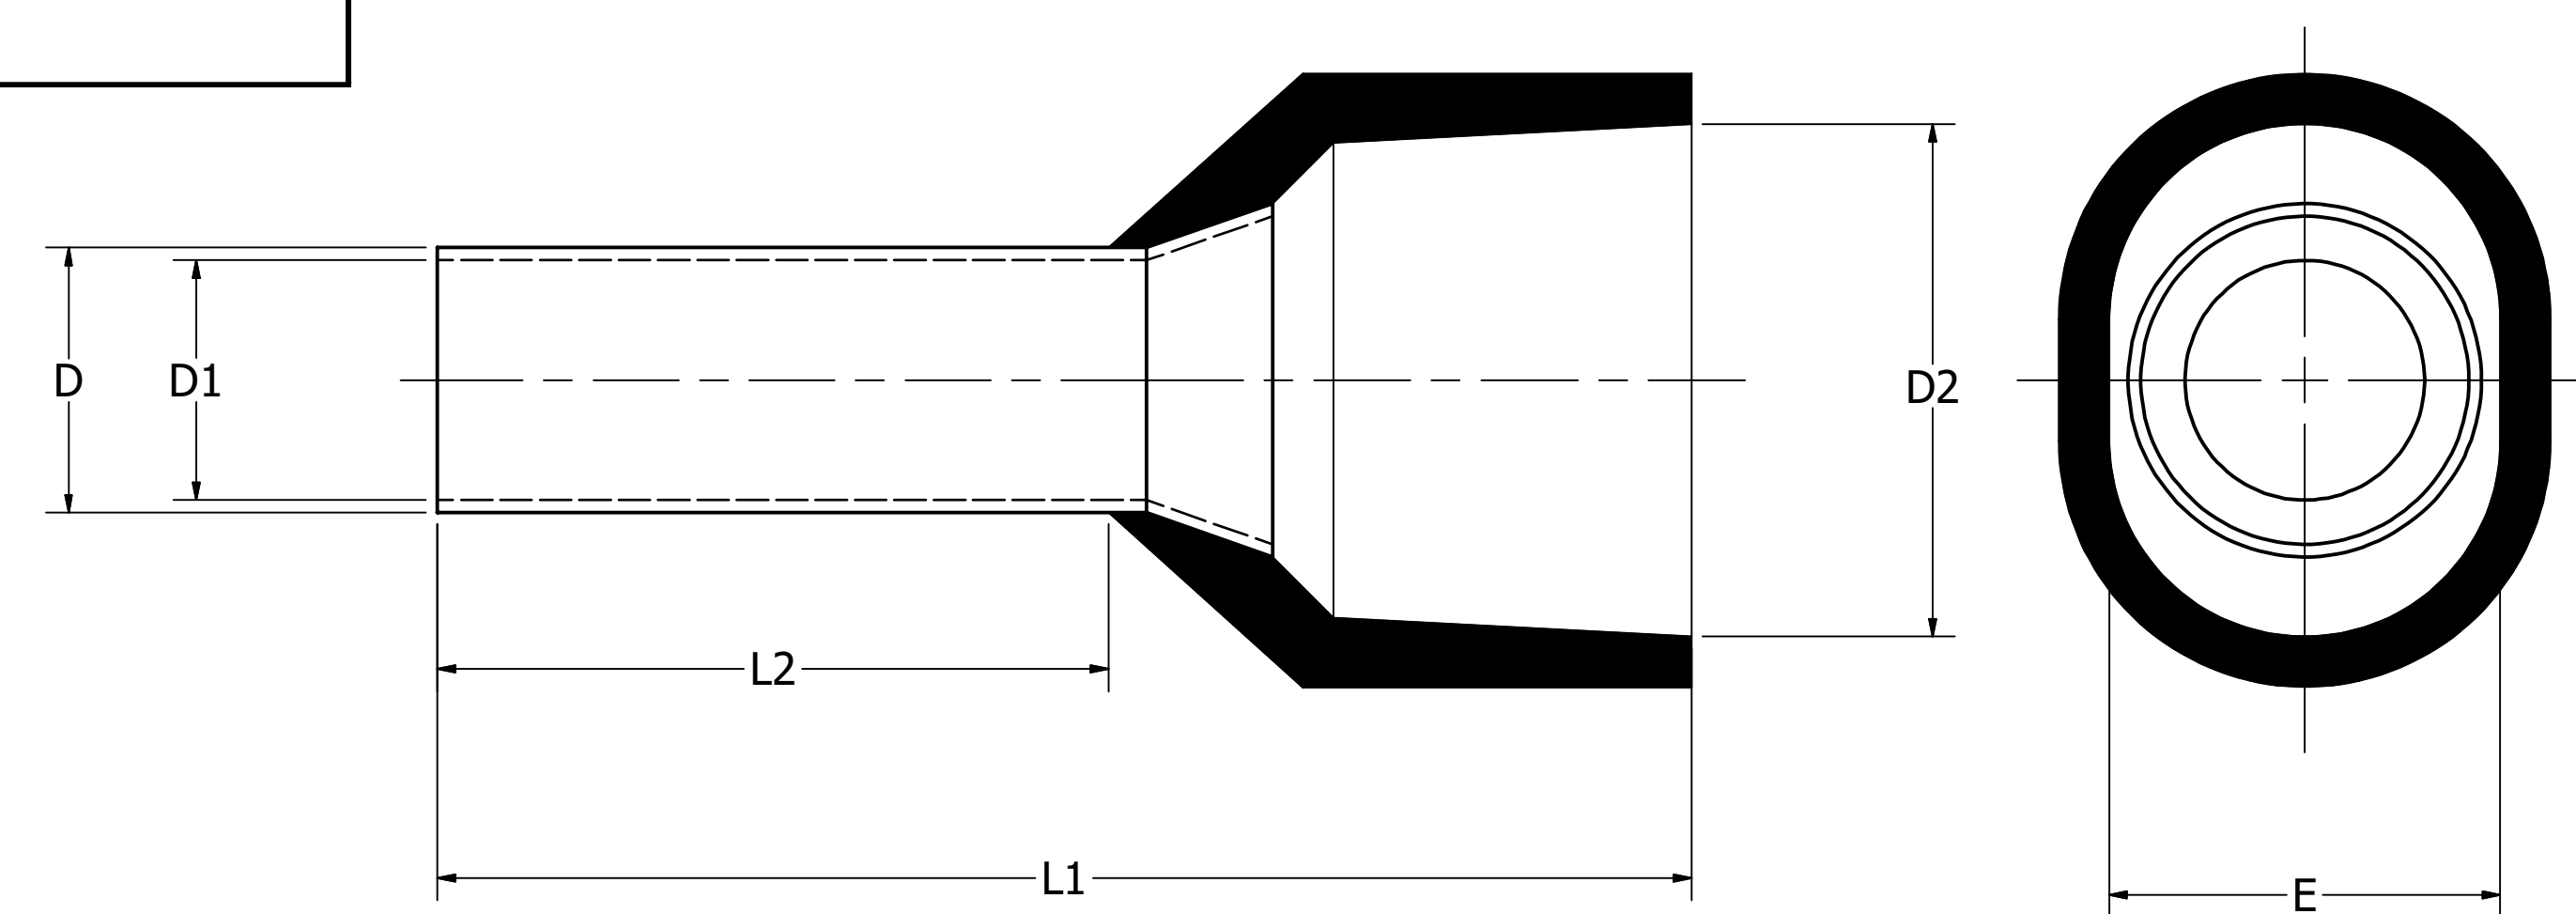

NOTES:

1. MATERIAL: COPPER.
2. FINISH : TIN PLATED
3. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS ROUNDED OFF TO THE NEAREST MILLIMETER, UNLESS OTHERWISE SPECIFIED AND ARE FOR REFERENCE ONLY.
4. UL LISTED BARE AND COVERED FERRULES PER UL486F REQUIREMENTS.
5. ITEMS WITH CATALOG NUMBERS FOLLOWED BY ASTERISKS (*) ARE NOT UL LISTED.

TO ORDER BURNDY® PRODUCTS CALL		INSULATED FERRULES	
UNITED STATES 1-800-346-4175 (LONDONDERRY, NH)		ITEM NO: SEE TABLE	
CANADA: 1-800-387-6487		CAT. NO: SEE TABLE	
FOR PRODUCT INFO: http://www.burndy.com		DRAWN BY: M.SAURABH 12/07/2020	
		CHECKER: K.HERNANDEZ 10/18/2022	
		DSN APRVL: K.HERNANDEZ 10/18/2022	
		MFG APRVL: --	
		QA APRVL: J.BRODEUR 05/10/2021	
		MKT APRVL: A.FITZGER 05/12/2021	
		PROD FAM: --	
		PROJECT #: --	
		SIZE: D	
		DOCUMENT TYPE: SALES	
		REL LEVEL: Released	
		DRAWING NO: 50111876	
		SHEET 6 OF 6	
		A	