


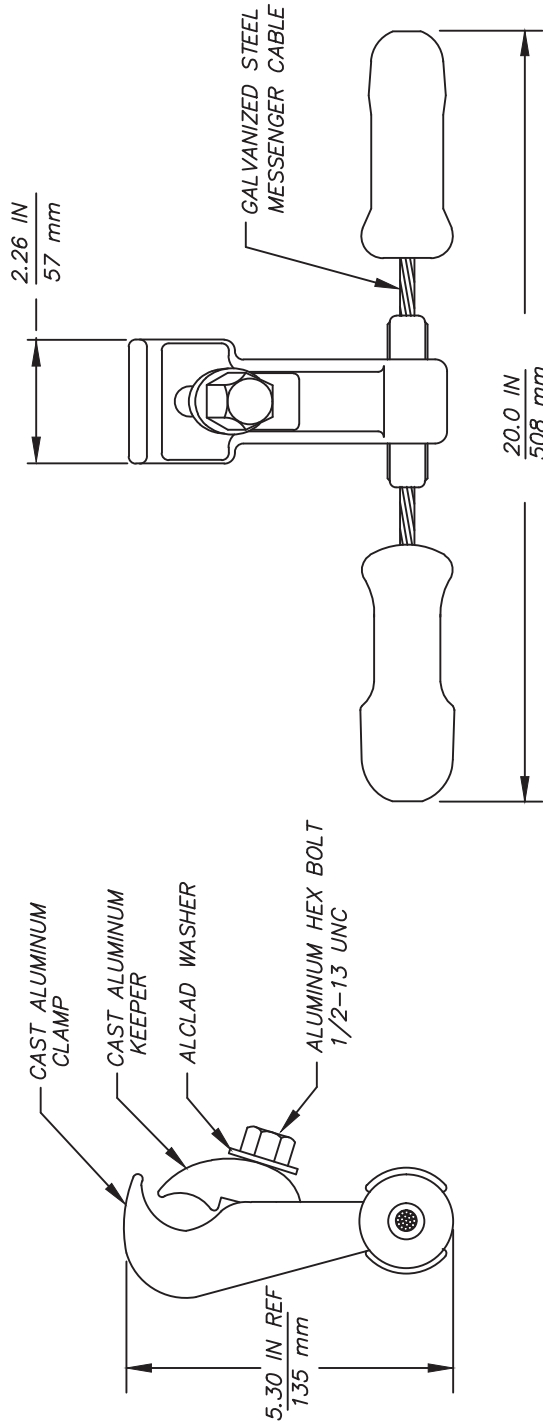

NOTES:

- 1) RECOMMENDED CONDUCTOR RANGE: 0.859 – 1.130 IN (21.8 – 28.7 mm)
- 2) INSTALLATION TORQUE: 25 LB-FT
- 3) NOMINAL WEIGHT: 9.0 LB (4.1 KG)
- 4) FOR "TORQUE HEAD" BOLTS ADD SUFFIX "0".

FARGO TOLERANCE CHART			HUBBELL® POWER SYSTEMS 60710-12 VIBRATION DAMPER
CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.		SIZE B	DWG NO. CUTSHEET
		CAT / PART / ASSY NO. 60710-12	REV A
		DO NOT SCALE THIS DRAWING	DRN BY LEB DATE 02/16/15 SHEET 1 OF 1