



Conforms to all Requirements of IEEE Std. 386 - Latest Revision


Maximum Continuous Voltage.....16.2 kV Phase-to-Ground
Continuous Current.....600/200 A

0.17 Sec. Duration.....25,000 A rms Symmetrical
3.00 Sec. Duration.....10,000 A rms Symmetrical

Basic Impulse Level.....	125 kV Crest (1.2 x 50 μ Sec. wave)
60 Hz (60 Sec.).....	45 kV rms
Partial Discharge Extinction Voltage (5 pC).....	21.5 kV rms

100% factory tested for Partial Discharge and either AC 60 Hz (45 kV for 60 Sec.) or Impulse (BIL) (125 kV 1.2 x 50 μ Sec. wave).

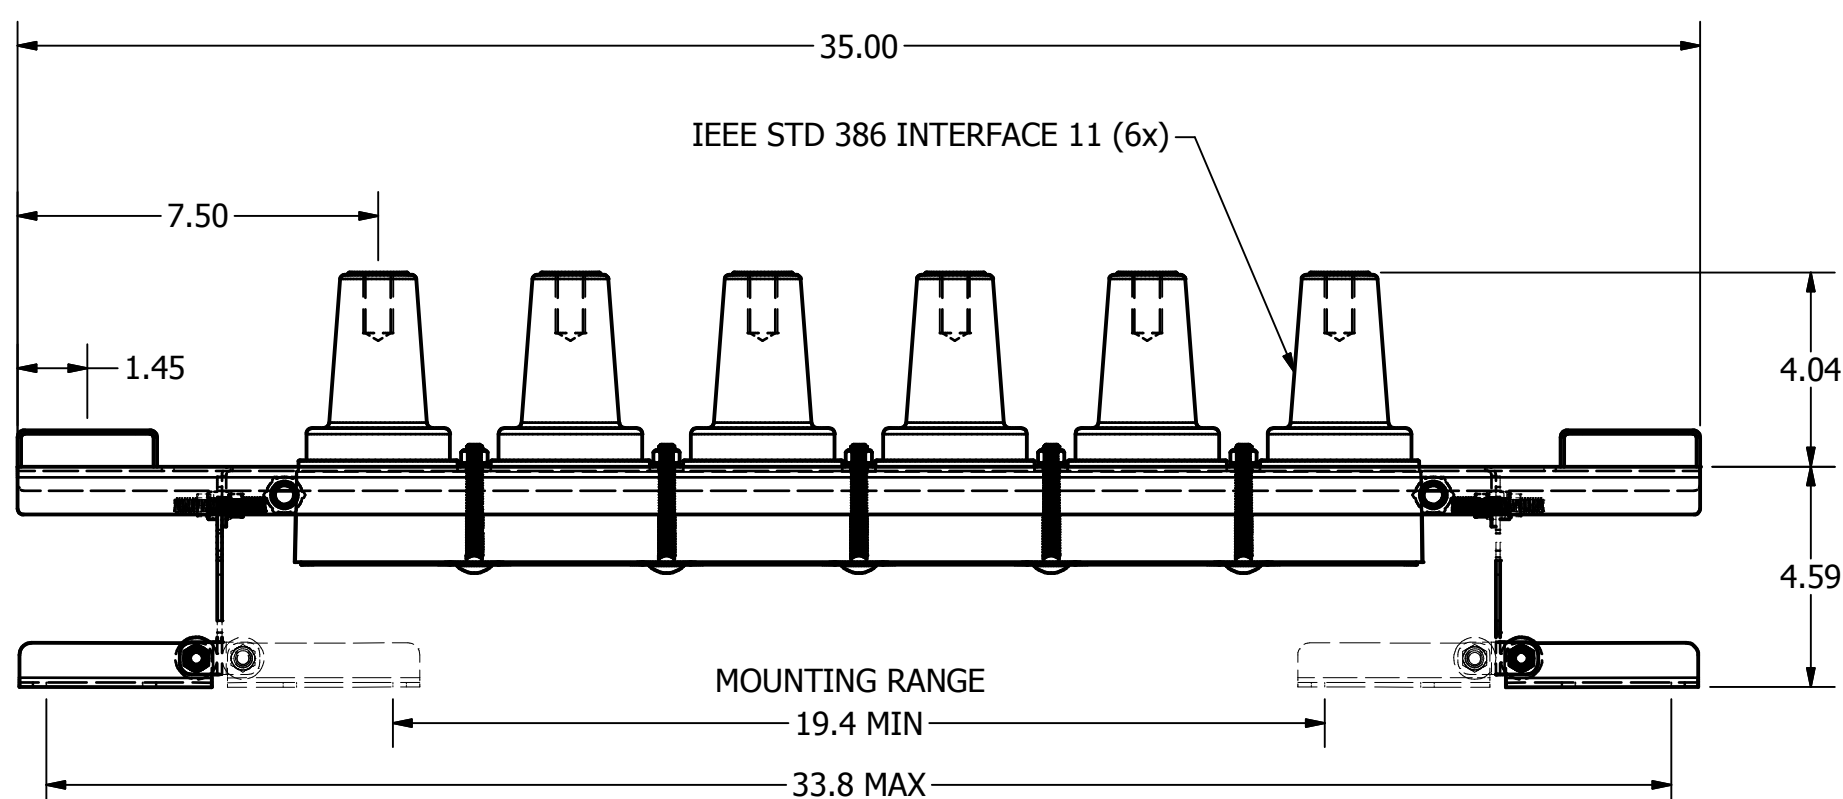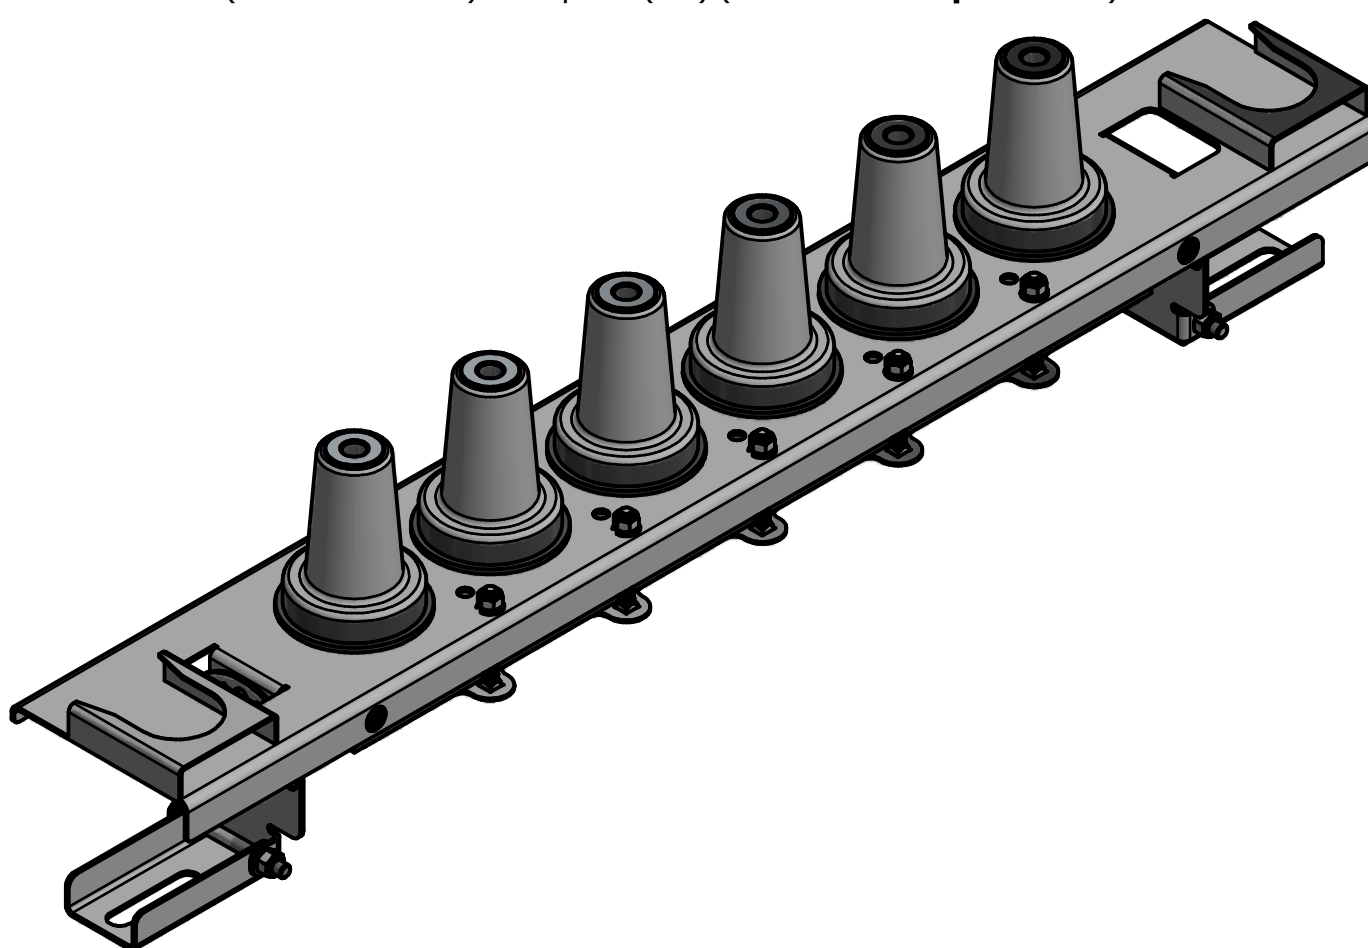

	 POWER SYSTEMS, INC.	HUBBELL POWER SYSTEMS, Inc.			
		TITLE <div>28kV TAPMASTER</div>			
	CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.	SIZE SB	DWG NO. --	CAT / PART / ASSY NO. 628TM666666B	REV 1

REV DATE 5/22/2017	DO NOT SCALE THIS DRAWING	DRN BY BvB	DATE 5/19/2017	SHEET 1 OF 1
-----------------------	---------------------------	------------	----------------	--------------