

600A 35 kV INSULATING CAP

Conforms to all Requirements of IEEE Std. 386 - Latest Revision

Ratings


Maximum Continuous Voltage.....21.1 kV Phase-to-Ground
Continuous Current.....600 A

Short-Time Current Ratings


0.17 Sec. Duration.....16,000 A rms Symmetrical
3.00 Sec. Duration.....10,000 A rms Symmetrical

Insulation Withstand Voltages


Basic Impulse Level.....150 kV Crest (1.2 x 50 μ Sec. wave)
60 Hz (60 Sec.).....50 kV rms
Partial Discharge Extinction Voltage (3 pC).....26.0 kV rms

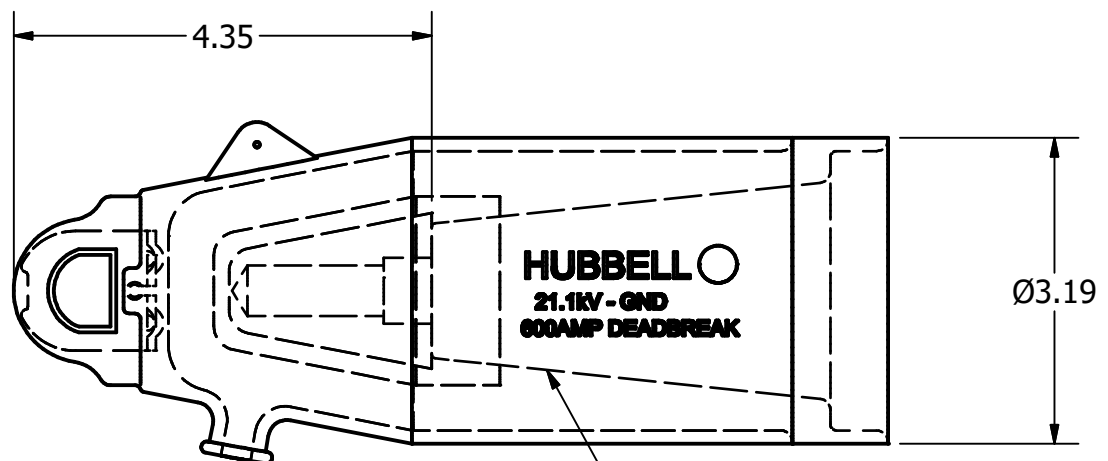

INTERFACE MATCHES WITH
IEEE Std. 386 INTERFACE 13



600A 35kV
ALUMINUM STUD

<p>CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.</p>				HUBBELL POWER SYSTEMS, Inc.	
		TITLE 600A 35 kV INSULATING CAP			
REV DATE	7/9/2020	SIZE	DWG NO.	CAT / PART / ASSY NO.	REV
		SB	---	635IC	0
		DO NOT SCALE THIS DRAWING	DRN BY BvB	DATE 07/09/2020	SHEET 1 OF 1